

Contractor: Winwater Hartford KY Co.

Plant: 100



Slack: 0.248"


REINFORCING PER ASTM A615 (GRADE 60).

- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

P2) 30" x 30" - CASTING HEIGHT - 4"
P1) 30" x 30" - BOX BASE 6inW, 6inF - 24"
1) CASTING - HOE 468 F/G
1) 30" x 30" - Conseal CS-102 1.00"
1) Hole - 18



0 lb
2500 lb
489 lb
0 lb
0 lb

Structure Total: 2989 lb

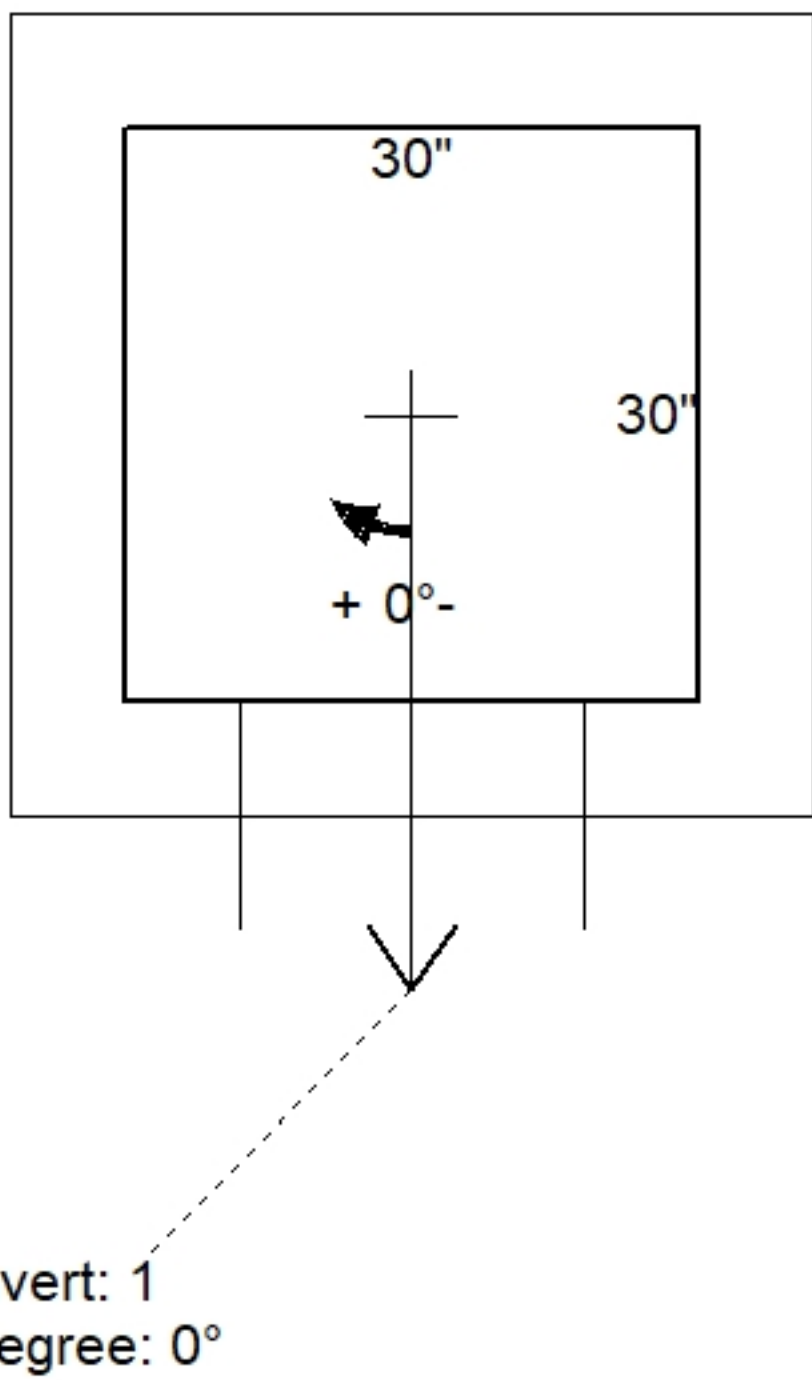

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	406.4'							
Reducer								
Invert 1	404.15'	0°	12" HDPE	14.5"	18"	Hole 18	-0.002"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

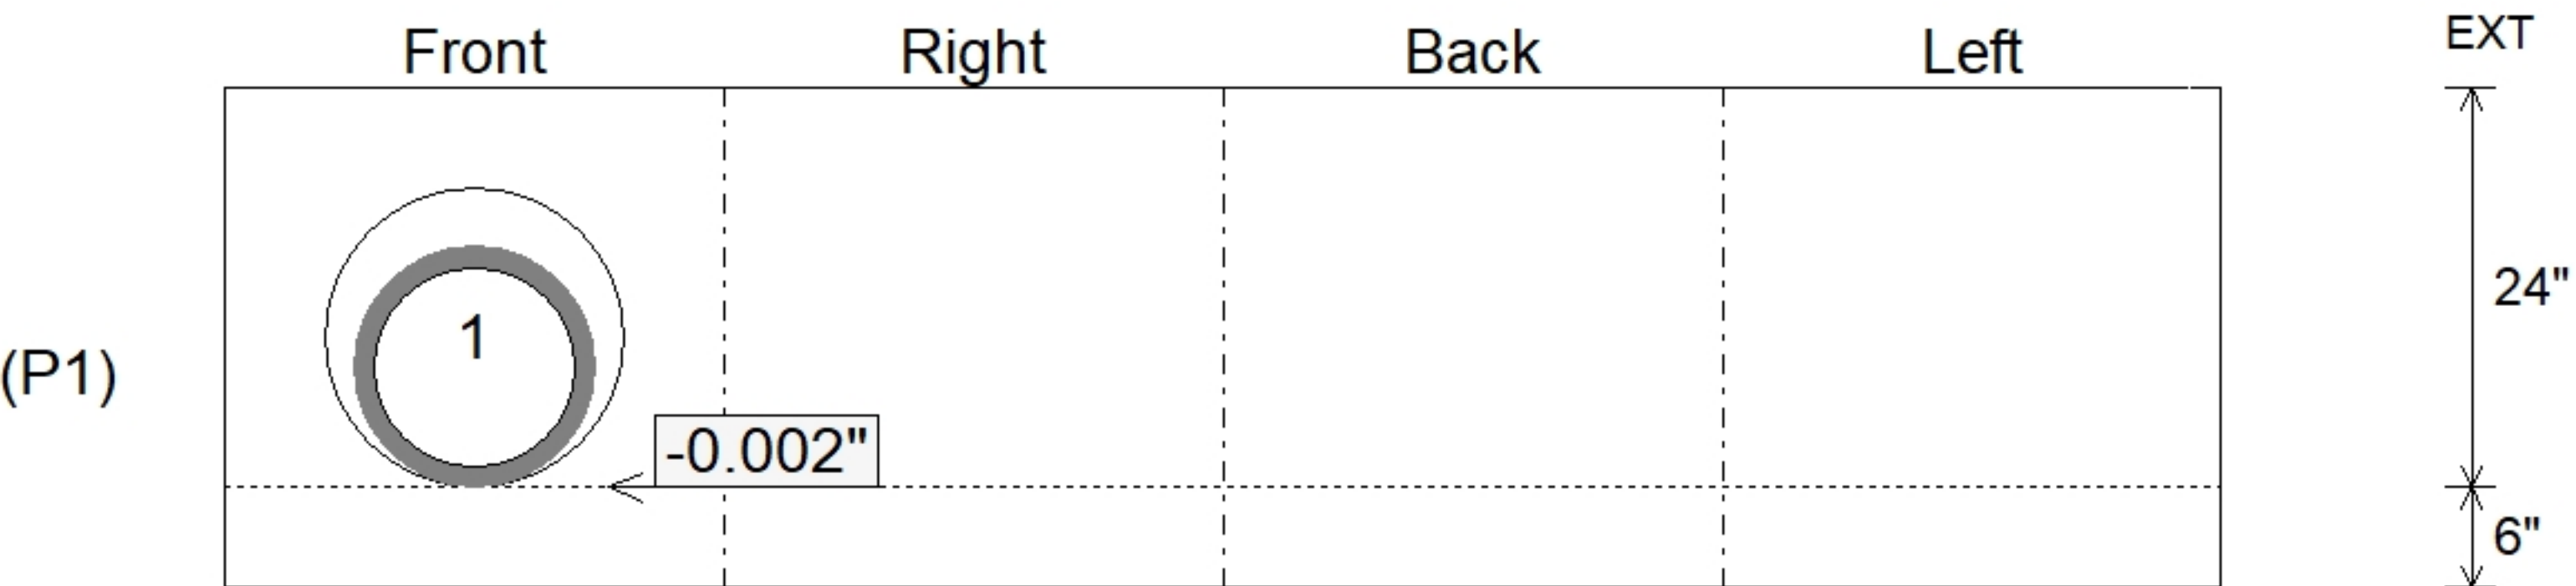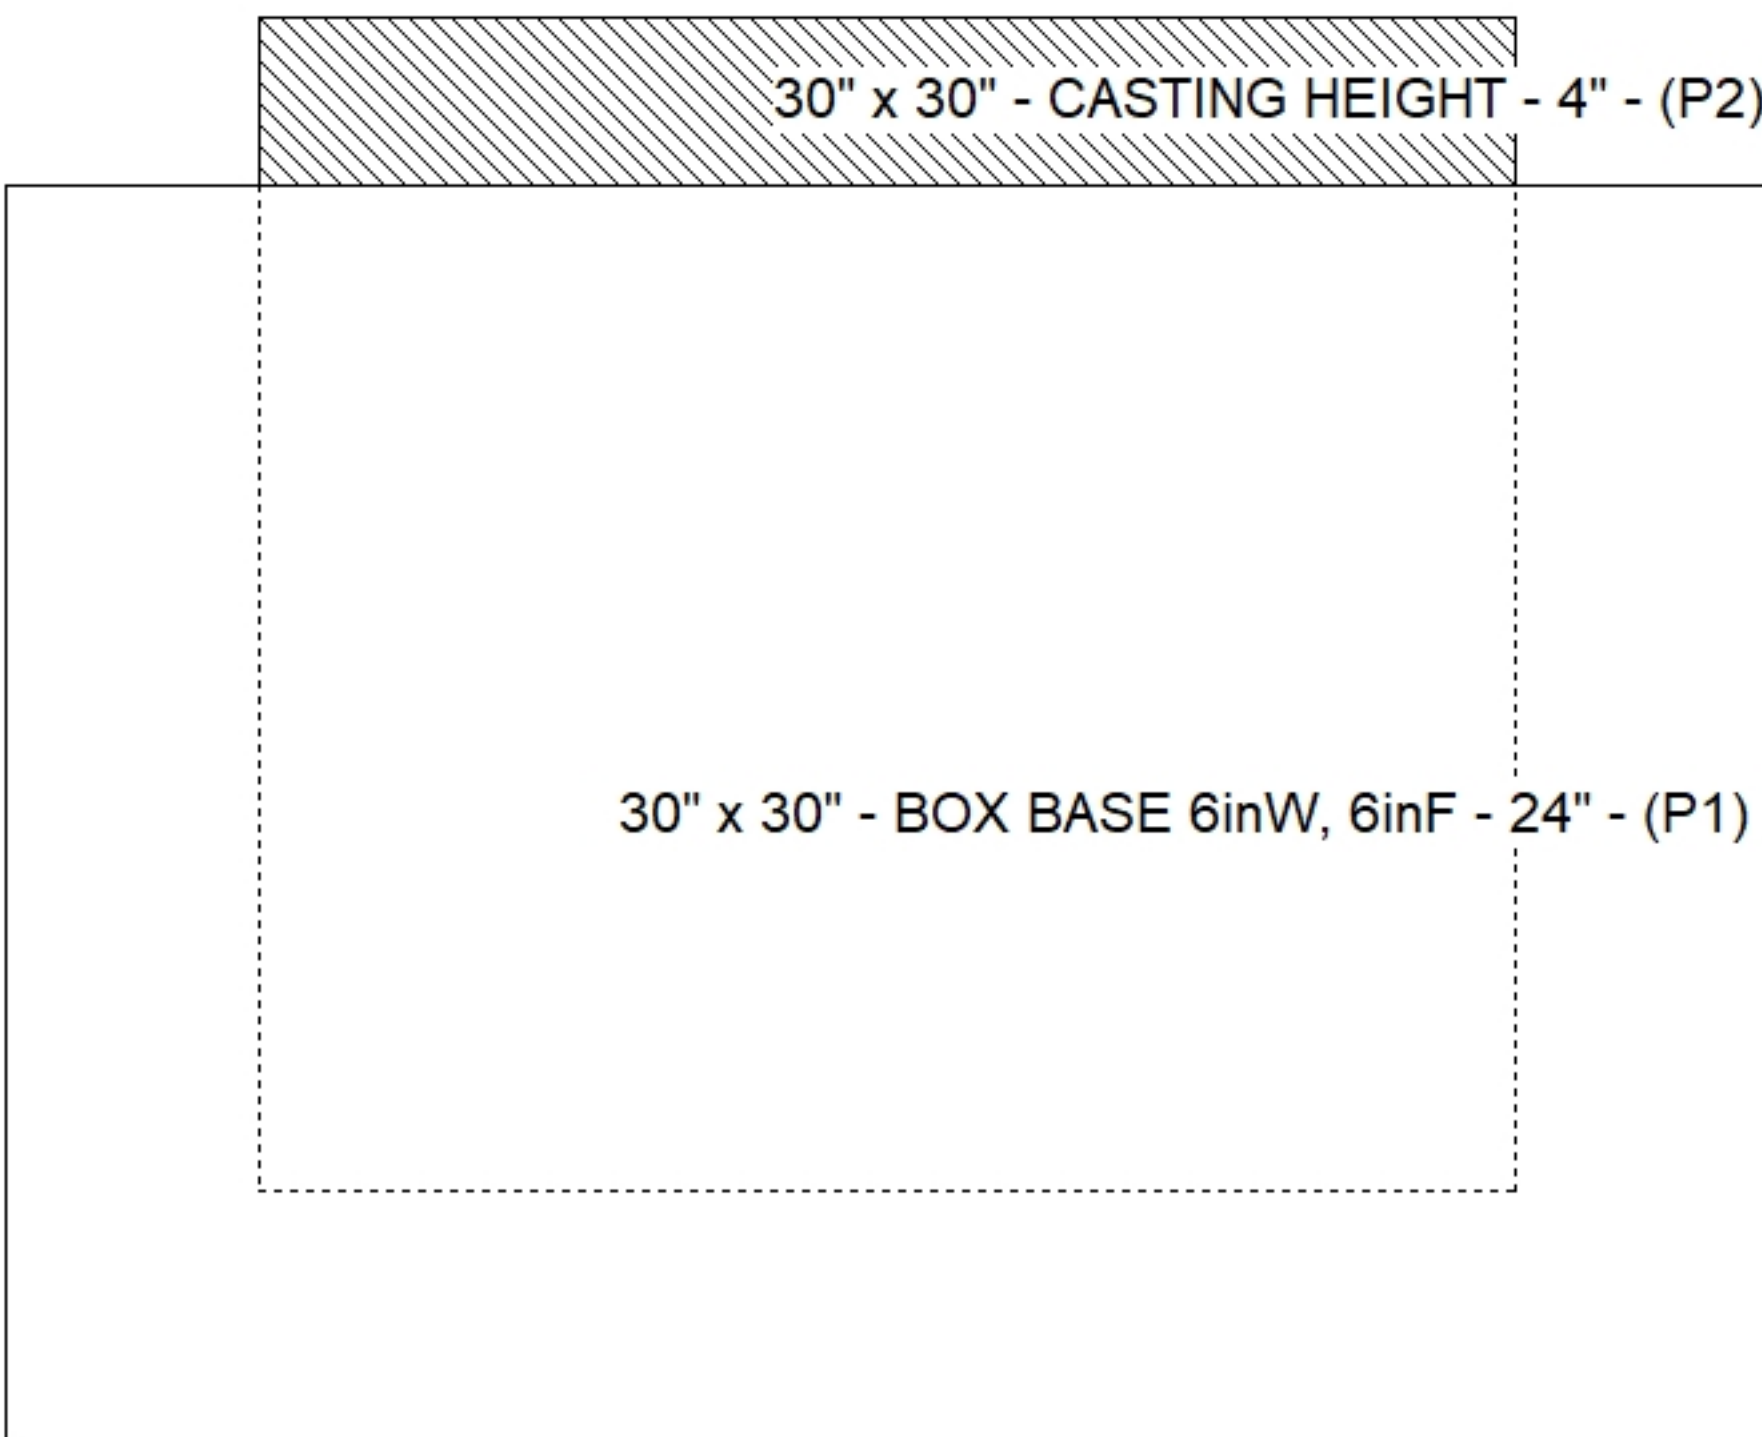

Submittal Drawing
6/2/2026 8:40:52 AM

SUBMITTAL
APPROVED BY: