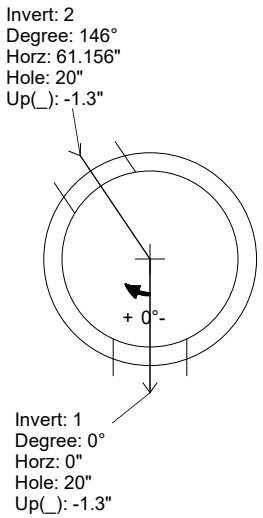
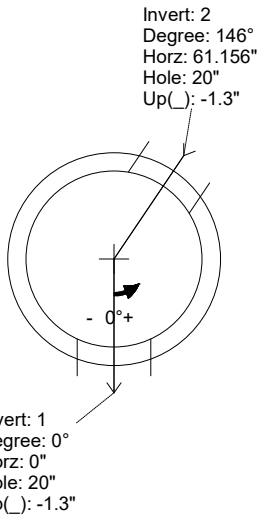

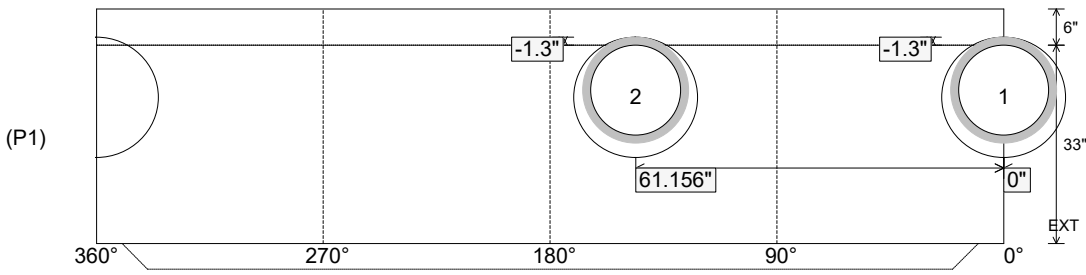


Job Name: 26-2146 - Fairview Apartments Job Location: Russell Springs, KY 42642 Contractor: Dirt Design Construction LLC					Plant: 100 8/3/2026 11:45:24 AM		Tech: J. Horsley PC: M. Sullivan			
Structure ID: 03 ST-DCB										
P1 MH048BAVF		MH BASE Custom Ht								
P3) 32" x 32" - CASTING HEIGHT - 3" P2) 48" - MH FLAT TOP w/32"x32" Hole - 12" P1) 48" - MH BASE Custom Ht - 33" 1) 48" - Conseal CS-102 1.00" 2) Hole - 20					0 lb 1629 lb 3365 lb 0 lb 0 lb ----- Structure Total: 4994 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY OTHERS (HOE 595 F/G) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING. - RISER (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 1058.75' Rim to Invert: 4.05' Slack: 0.6" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	1054.7'	0°	0"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.3"	0"
Invert 2	1054.7'	146°	73.897"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.3"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions)   INSIDE WALL DIMENSIONS 										
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 5" Floor Height: 6"		Height (Int): 33" Height (Ext): 39"		Weight (Net): 3365 lb Volume (Net): 0.86cu.yd	