

Job Name: 26-2146 - Fairview Apartments
Job Location: Russell Springs, KY 42642
Contractor: Dirt Design Construction LLC

Plant: 100

8/3/2026 11:47:13 AM

Tech: J. Horsley

PC: M. Sullivan



Structure ID: MH 2 SS-MH

P3 GR4

GRADE RING

P4) 24" - CASTING HEIGHT - 7"
P3) 24" - GRADE RING - 4"
P2) 48" - ECC CONE w/ 24" HOLE - 24"
P1) 48" - MH BASE - 18"
1) 48" - MH INVERT CHANNEL - FULL HEIGHT
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) 48" - Conseal CS-102 1.00" (Double)
2) PSX - 12-08 NYLO
1) MH Step ML-10-TDS-NCR - 10"

Structure Total:

0 lb
270 lb
1550 lb
2492 lb
1440 lb
0 lb
0 lb
0 lb
16 lb
0 lb


5768 lb

Structure Notes:


1. PER ASTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. CASTING BY OTHERS (HOE MC-420 F/C).
- REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:


1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
 - CONCRETE: 4,000 PSI @ 28 DAYS.
 - REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
2. WEIGHT: 4" 270 Lbs.

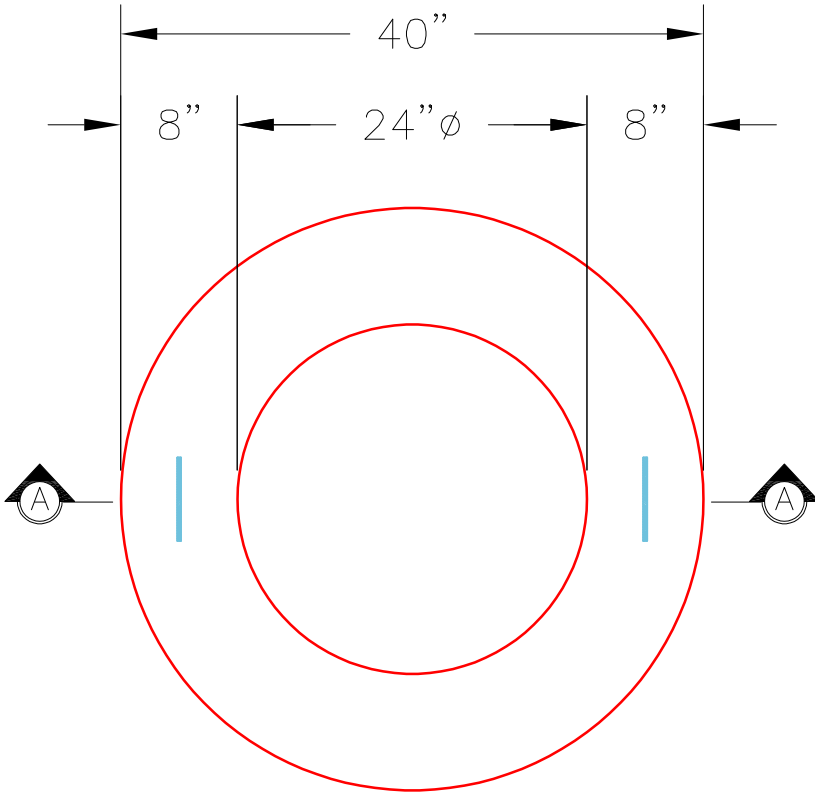

PLAN VIEW

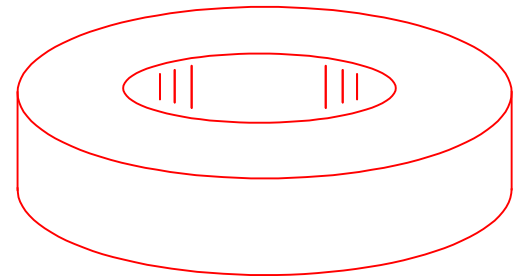

ISOMETRIC VIEW

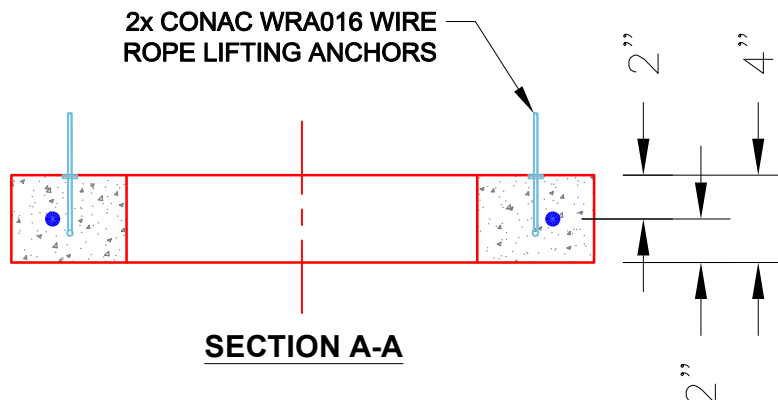

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb
Volume (Net): 0.07cu.yd