

Job Name: 26-2153 - Southwire Material Hawesville
Job Location: Hawesville, KY
Contractor: Hodskins Services

Plant: 100
6/19/2026 6:36:00 PM

Tech: Jared - F
PC: E. Bradley



Structure ID: DBI 395.50

P3 MH048LD07S



MH FLAT TOP w/34"x34" Hole F/F

- P4) 34" x 34" - CASTING HEIGHT - 7"
P3) 48" - MH FLAT TOP w/34"x34" Hole F/F - 7"
P2) 48" - MH RISER Custom Ht F/G - 58"
P1) 48" - MH BASE Custom Ht T/n - 41"
1) CASTING - NEENAH R-3481 (F/G)
2) 48" - Con seal CS-102 1.00"
1) Hole - 32
1) DOGHOUSE INVRTD - 34"x30"
1) Hole - 18
8) MH Step ML-10-TDS-NCR - 10"

0 lb
873 lb
3596 lb
3722 lb
294 lb
0 lb
0 lb
0 lb
0 lb
0 lb

Structure Total: 8485 lb

Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (NEENAH R-3481 (F/G)).
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

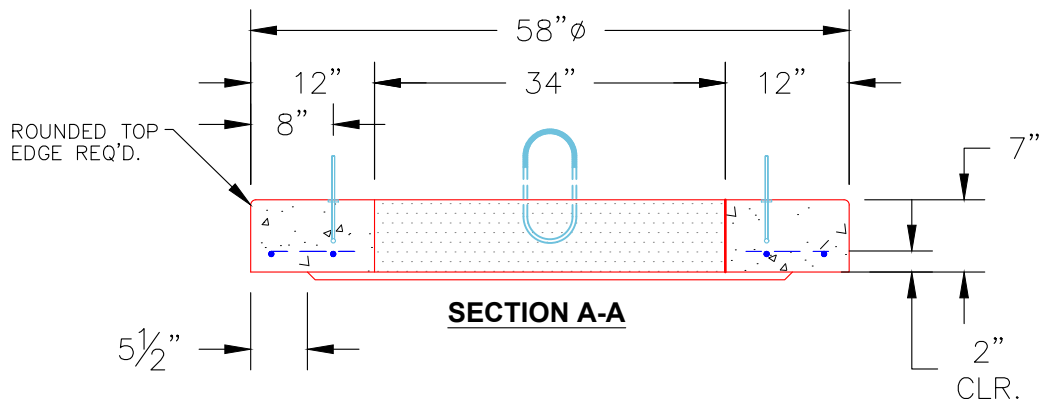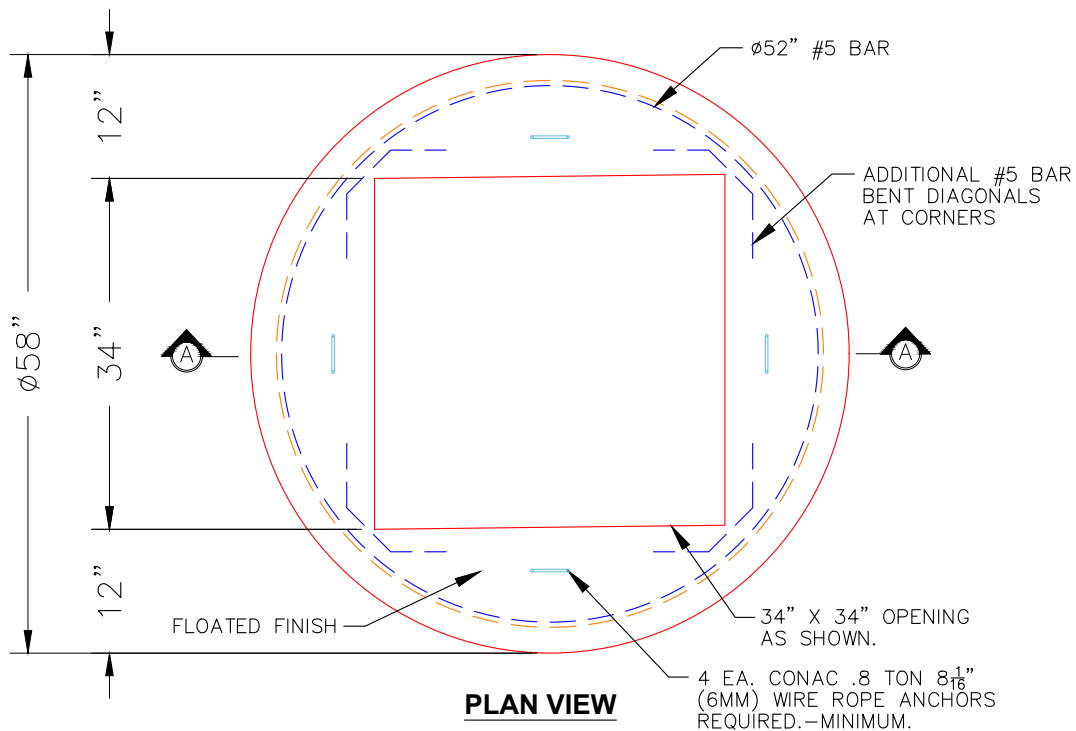

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 5"

Height (Ext): 7"

Weight (Net): 873 lb
Volume (Net): 0.22cu.yd