




Job Name: 26-2171 - Lake Malone Campground Multi Park West Job Location: Lewisburg, KY Contractor: Sensabaugh Design & Construction, LLC					Plant: 100 6/16/2026 10:48:08 AM		Tech: Jared - F PC: M. Sullivan				
Structure ID: CB-A1											
P1 BX2424-08BAVF BOX BASE 8inW, 8inF, Variable Ht F/n											
P2) 24" x 24" - CASTING HEIGHT - 4" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 35" 1) CASTING - HOE 280T F/G 1) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 16 1) Hole - 12 1) Hole - 6					0 lb 3847 lb 182 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 4029 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 280T F/G). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 570.2' Rim to Invert: 3.25' Slack: 0" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	566.95'	0°	20"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"	
Invert 2	567.5'	200°	22"	8" HDPE	9.1"	Hole 12	12"	12.77"	6"	-5"	
Invert 3	567.5'	270°	19"	4" HDPE	4.8"	Hole 6	6"	6"	6.25"	-1"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

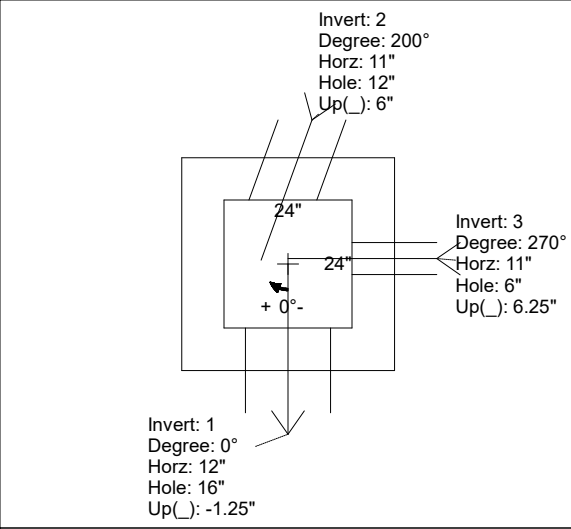


RIGHT-SIDE UP VIEW (int. dimensions)

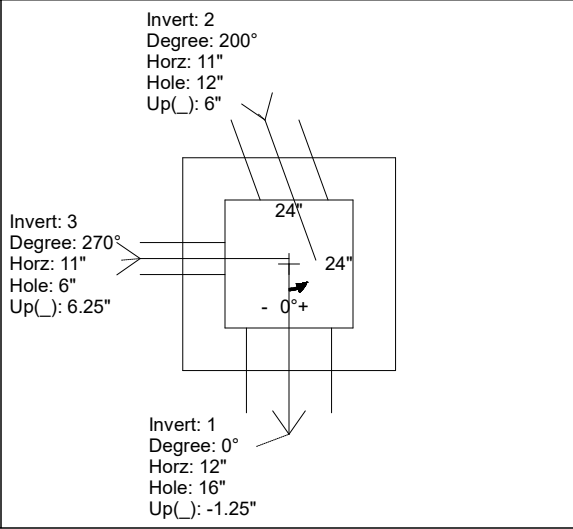

UPSIDE-DOWN VIEW (int. dimensions)

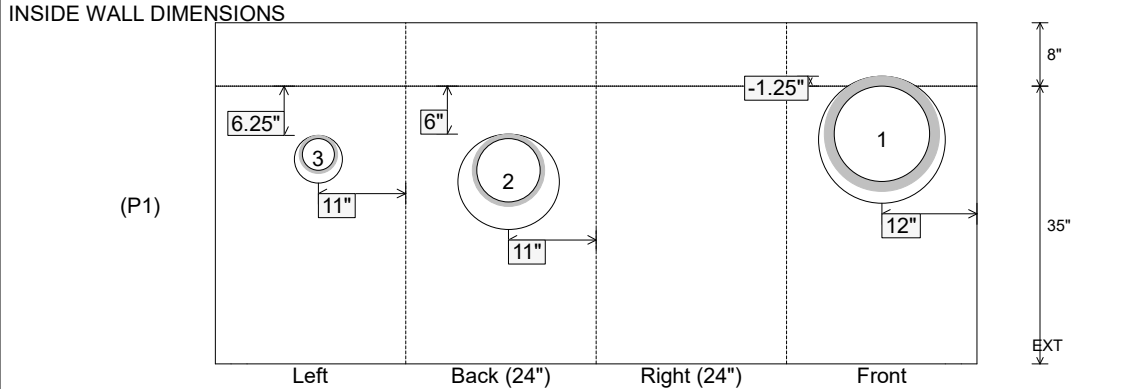

INSIDE WALL DIMENSIONS



(P1) <<

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 35" Height (Ext): 43"	Weight (Net): 3847 lb Volume (Net): 0.98cu.yd
----------------------------------	-------------------------------	--	--	--