



Job Name: 26-2171 - Lake Malone Campground Multi Park West Job Location: Lewisburg, KY Contractor: Sensabaugh Design & Construction, LLC					Plant: 100 6/11/2026 3:15:50 PM		Tech: Jared - F PC: M. Sullivan					
Structure ID: SSMH-E1												
P2		MH048RSVF										
MH RISER Custom Ht T/F												
P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE F/G - 36" P2) 48" - MH RISER Custom Ht T/F - 70" P1) 48" - P.I.P. BY OTHERS - BTM SLAB F/n - 0" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-315 F/C Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) DOGHOUSE - 12"x18" 1) PSX - 8QRS-S NYLO 1) PSX - 12-06 NYLO 9) MH Step ML-10-TDS-NCR - 10"					0 lb 3000 lb 4637 lb 0 lb 0 lb 0 lb 1440 lb 258 lb 0 lb 0 lb 0 lb 6 lb 8 lb 0 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING SUPPLIED BY ICAST (HOE MC-315 F/C "SANITARY"). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12)					
Rim: 567.82'					Rim to Invert: 8.87'		Slack: 1.44"		Sump: 8"		Step Position: 0°	
Structure Total: 9350 lb												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	558.95'	0°	0"	6" PVC SDR35	6.25"	DOGHOUSE 12"x18"	12" x 18"	12.129"	2"	0"		
Invert 2	559'	134°	67.875"	4" PVC SCH40	4.5"	PSX 8QRS-S NYLO	8"	8.038"	6.625"	0"		
Invert 3	558.95'	180°	91.125"	6" PVC SDR35	6.25"	DOGHOUSE 12"x18"	12" x 18"	12.129"	2"	0"		
Invert 4	559'	234°	118.5"	6" PVC SDR35	6.25"	PSX 12-06 NYLO	12"	12.129"	5.625"	0"		
Invert 5												
Invert 6												
Invert 7												
Invert 8												

RIGHT-SIDE UP VIEW (int. dimensions)

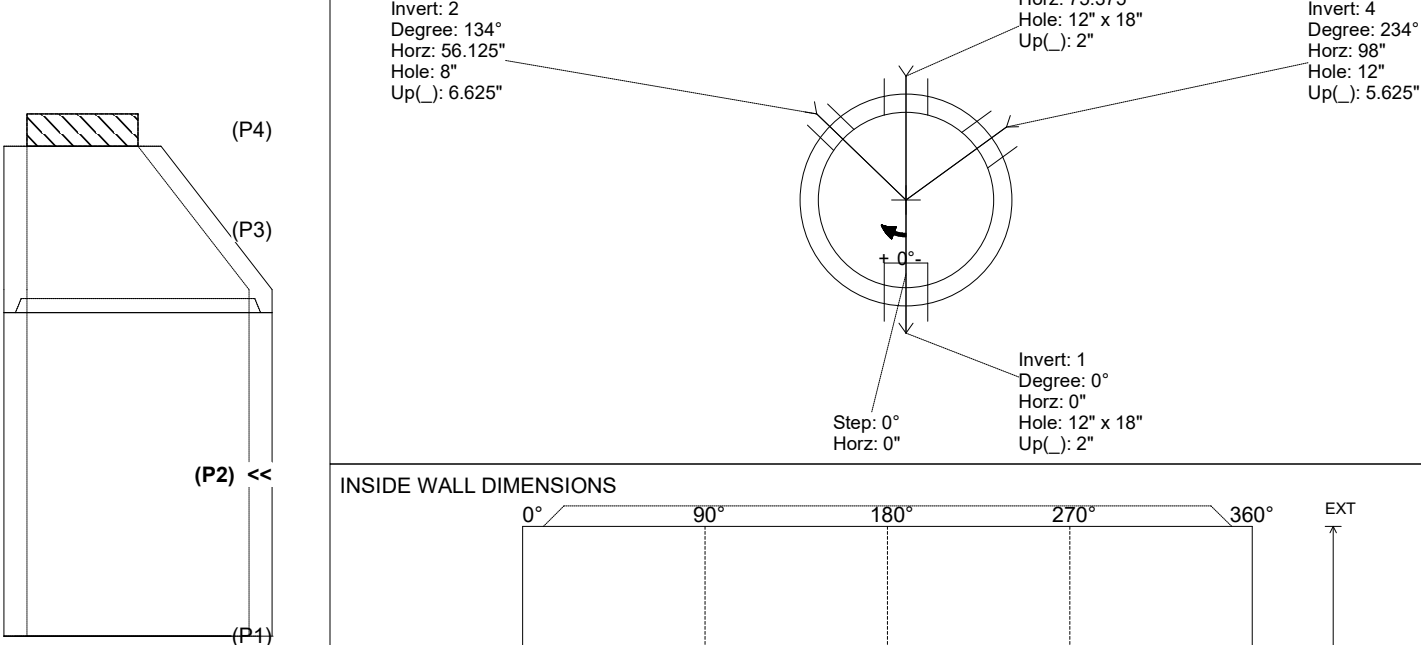

INSIDE WALL DIMENSIONS

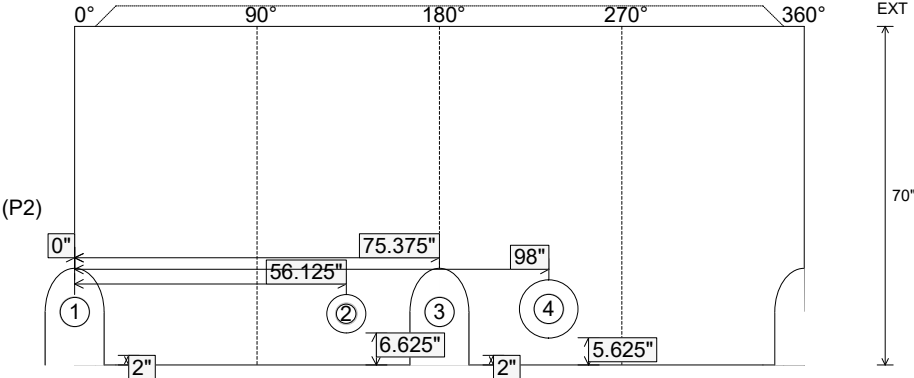

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Flat	Wall Thickness: 5" Floor Height: 0"	Height (Int): 70" Height (Ext): 70"	Weight (Net): 4637 lb Volume (Net): 1.18cu.yd
----------------------------------	----------------------------------	--	--	--