




Job Name: 26-2212 - CDTI Building 1 Job Location: Charlestown, IN Contractor: Dan Cristiani Excavating Co. Inc.					Plant: Beaver Dam 8/18/2026 12:38:28 PM		Tech: J. Coppage PC: E. Bradley				
Structure ID: 106 ST-MH											
P1 MH072BAVF			MH BASE Custom Ht								
P4) 24" x 36" - CASTING HEIGHT - 6" P3) 72" - MH FLAT TOP w/24"x36" Hole - 10" P2) 72" - MH RISER Custom Ht - 30" P1) 72" - MH BASE Custom Ht - 66" 2) 72" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 52 1) DOGHOUSE INVRTD - 24"x20" 5) MH Step ML-10-TDS-NCR - 10"						0 lb 4149 lb 4113 lb 10787 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 19050 lb		Structure Notes: . **INDOT STATE PROJECT** 1. (GREEN HAT CI3158-F PROVIDED BY OTHERS) 2. INDOT MH TYPE K / ASTM C478 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. NO INVERT CHANNEL. 5. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .62) #5 BARS AT 6" C.C.E.W.			
Rim: 607.5' Rim to Invert: 9.31' Slack: 2.87' Sump: 3.15' Step Position: 90°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	598.19'	0°	0"	42" HDPE	47.7"	Hole 52	52"	58.105"	0"	0"	
Invert 2	598.29'	180°	135.088"	42" HDPE	47.7"	Hole 52	52"	58.105"	1.2"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

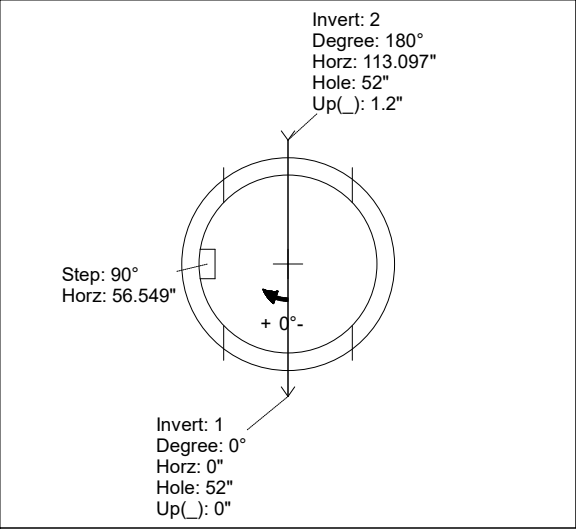

RIGHT-SIDE UP VIEW (int. dimensions)

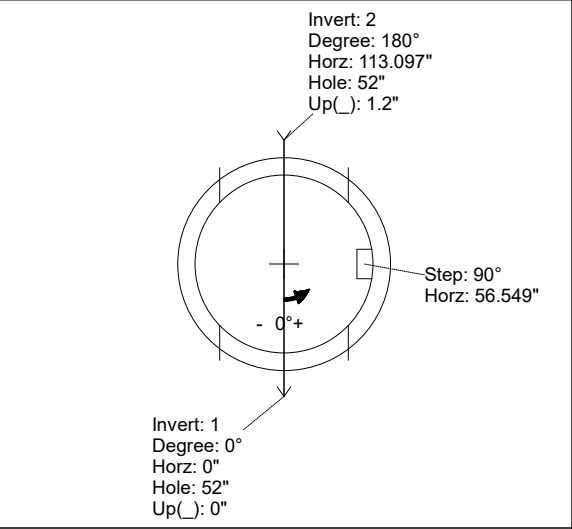

UPSIDE-DOWN VIEW (int. dimensions)

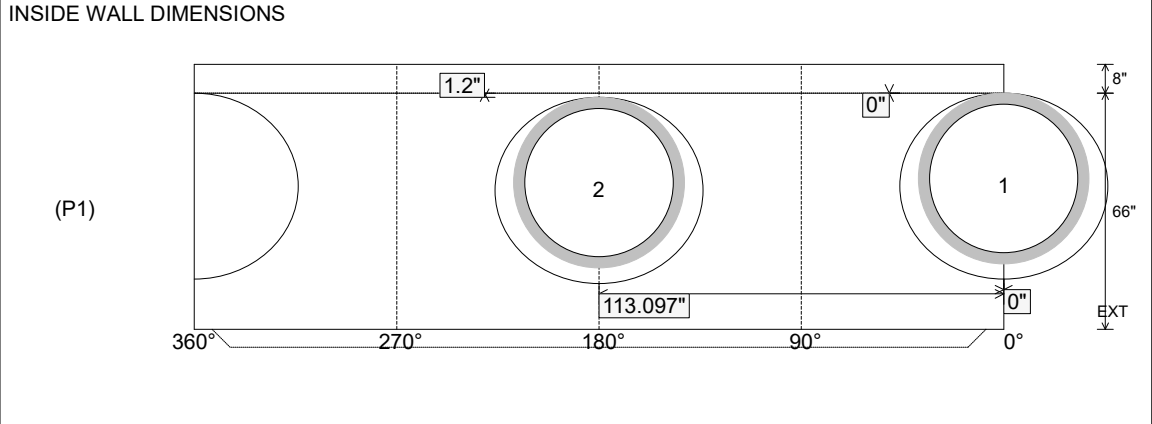

INSIDE WALL DIMENSIONS

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 7" Floor Height: 8"	Height (Int): 66" Height (Ext): 74"	Weight (Net): 10787 lb Volume (Net): 2.76cu.yd
----------------------------------	---------------------------------	--	--	---