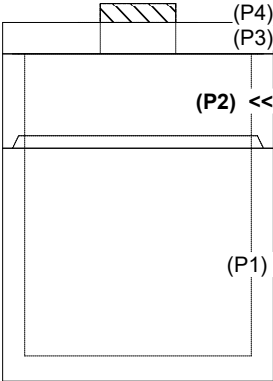
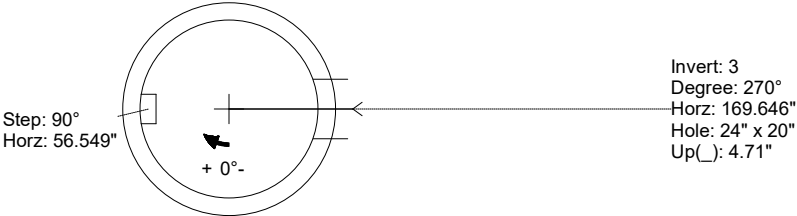
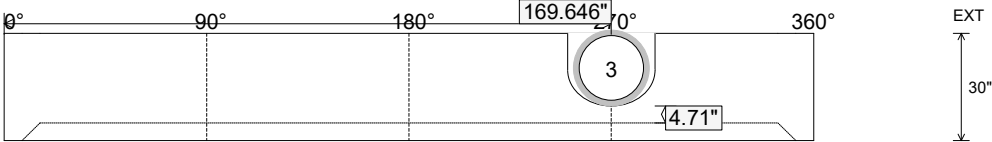


Job Name: 26-2212 - CDTI Building 1 Job Location: Charlestown, IN Contractor: Dan Cristiani Excavating Co. Inc.					Plant: Beaver Dam 8/18/2026 12:42:49 PM		Tech: J. Coppage PC: E. Bradley					
Structure ID: 106 ST-MH												
P2		MH072RSVF		MH RISER Custom Ht								
P4) 24" x 36" - CASTING HEIGHT - 6" P3) 72" - MH FLAT TOP w/24"x36" Hole - 10" P2) 72" - MH RISER Custom Ht - 30" P1) 72" - MH BASE Custom Ht - 66" 2) 72" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 52 1) DOGHOUSE INVRTD - 24"x20" 5) MH Step ML-10-TDS-NCR - 10"					0 lb 4149 lb 4113 lb 10787 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 19050 lb		Structure Notes: . **INDOT STATE PROJECT** 1. (GREEN HAT CI3158-F PROVIDED BY OTHERS) 2. INDOT MH TYPE K / ASTM C478 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. NO INVERT CHANNEL. 5. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .62) #5 BARS AT 6" C.C.E.W.					
Rim: 607.5'					Rim to Invert: 9.31'		Slack: 2.87'		Sump: 3.15'		Step Position: 90°	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1												
Invert 2												
Invert 3	604.37'	270°	202.633"	18" HDPE	21.2"	DOGHOUSE INVRTD 24"x20"	24" x 20"	24.468"	4.71"	0"		
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
												
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 7" Floor Height: 0"		Height (Int): 30" Height (Ext): 30"		Weight (Net): 4113 lb Volume (Net): 1.05cu.yd		