

Job Name: 26-2212 - CDTI Building 1
Job Location: Charlestown, IN
Contractor: Dan Cristiani Excavating Co. Inc.

Plant: Beaver Dam

Tech: J. Coppage

8/18/2026 12:40:33 PM

PC: E. Bradley



Structure ID: 202 ST-MH

P2 MH060LD13SP



MH FLAT TOP w/24"x48" Hole

- P3) 24" x 48" - CASTING HEIGHT - 8"
P2) 60" - MH FLAT TOP w/24"x48" Hole - 13"
P1) 60" - MH BASE Custom Ht - 46"
1) 60" - Conseal CS-102 1.00"
1) 24" x 48" - Conseal CS-102 1.00"
1) Hole - 40
1) Hole - 24
4) MH Step ML-10-TDS-NCR - 10"

0 lb
2272 lb
6620 lb
0 lb
0 lb
0 lb
0 lb
0 lb

Structure Total: 8892 lb

- Structure Notes:**
INDOT STATE PROJECT
1. (NEENAH R-3287-15 PROVIDED BY OTHERS)
2. INDOT MH TYPE J / ASTM C478 SPEC'S.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. NO INVERT CHANNEL.
5. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #4 BARS AT 9" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .62) #5 BARS AT 6" C.C.E.W.

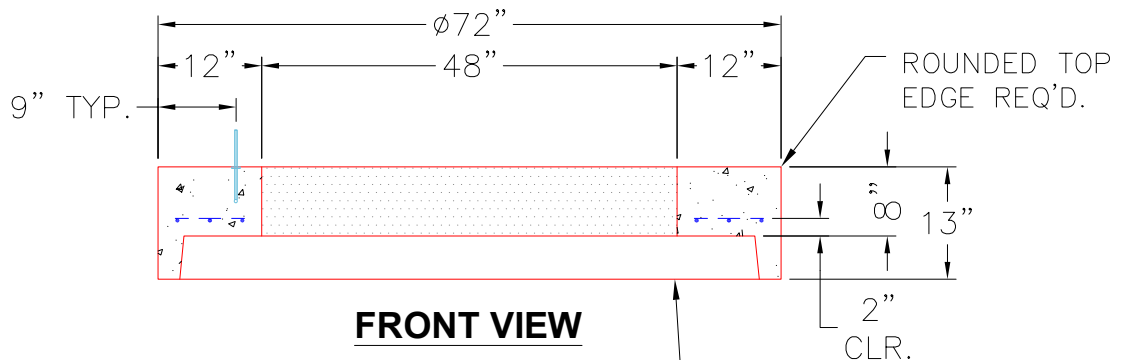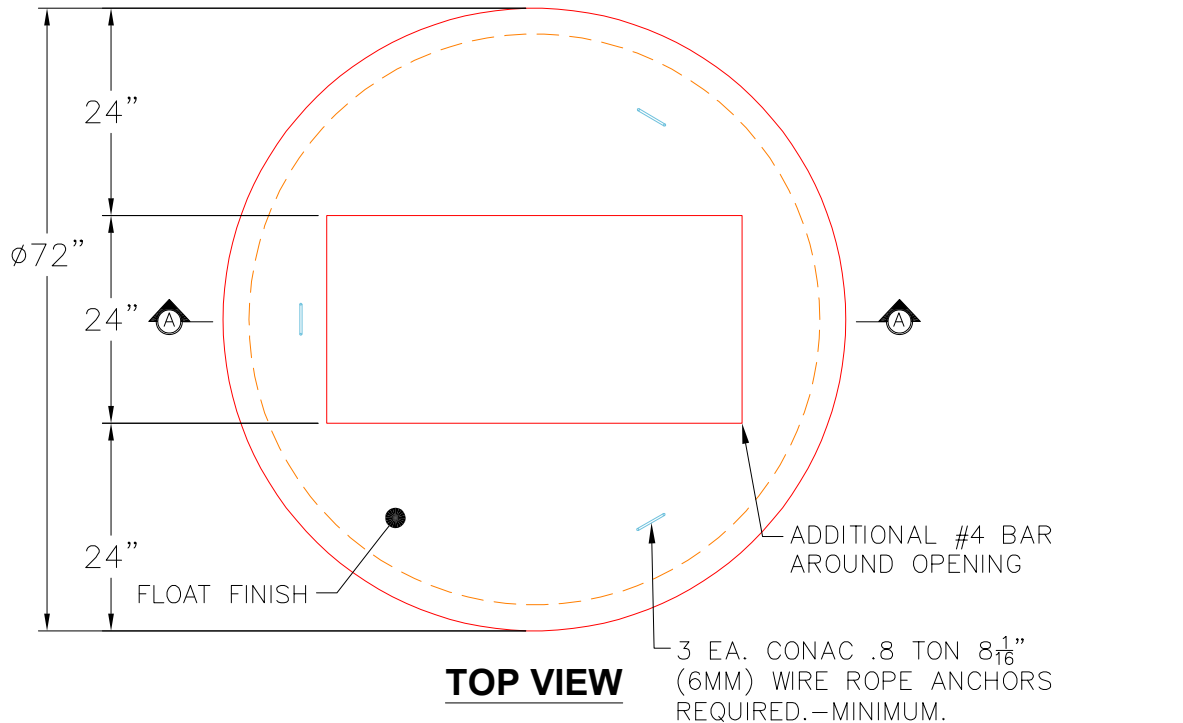

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 9" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 6"

Height (Ext): 13"

Weight (Net): 2272 lb
Volume (Net): 0.58cu.yd