

Job Name: 26-2212 - CDTI Building 1
Job Location: Charlestown, IN
Contractor: Dan Cristiani Excavating Co. Inc.

Plant: Beaver Dam

Tech: J. Coppage

8/18/2026 12:40:33 PM

PC: E. Bradley



Structure ID: 203 ST-MH

P2 MH060LD08-24X36RECT

MH FLAT TOP w/24"x36" Hole


- P3) 24" x 36" - CASTING HEIGHT - 6"
P2) 60" - MH FLAT TOP w/24"x36" Hole - 8"
P1) 60" - MH BASE Custom Ht - 51"
1) 60" - Conseal CS-102 1.00"
1) 24" x 36" - Conseal CS-102 1.00"
1) Hole - 44
1) Hole - 40
4) MH Step ML-10-TDS-NCR - 10"

Structure Total:

0 lb
2153 lb
6534 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb
8687 lb

Structure Notes:

- **INDOT STATE PROJECT****
1. (GREEN HAT CI3158-F PROVIDED BY OTHERS)
 2. INDOT MH TYPE J / ASTM C478 SPEC'S.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. NO INVERT CHANNEL.
 5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
 - RISER/WALLS (As .12)
 - FLOOR (As .62) #5 BARS AT 6" C.C.E.W.

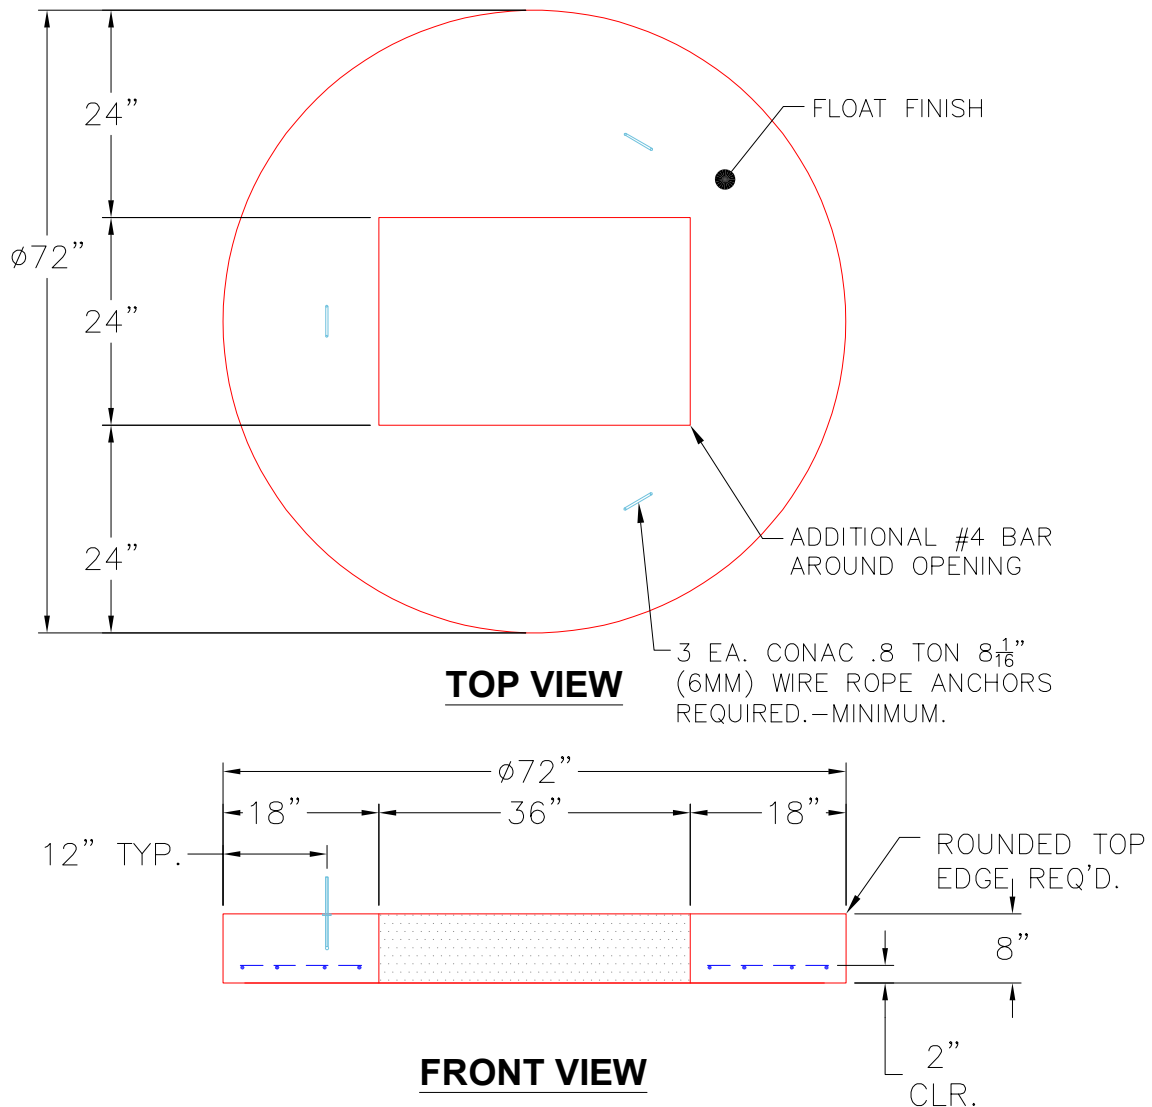

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 9" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 6"

Height (Ext): 8"

Weight (Net): 2153 lb
Volume (Net): 0.55cu.yd