

Job Name: 26-2212 - CDTI Building 1
Job Location: Charlestown, IN
Contractor: Dan Cristiani Excavating Co. Inc.

Plant: Beaver Dam

8/3/2026 10:58:50 AM

Tech: J. Coppage

PC: E. Bradley



Structure ID: QL39 Sump Pit - 18" I.D. x 16" Long Sump Pit w/ 4" Floor


P1 PIPRCP183

RCP B WALL - 18"

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM C-76 STANDARD REINFORCEMENT FOR 18" RCP CLASS III
4. WEIGHT: 110 LBS.

CONSTRUCT WITH A CUT
PIECE OF 18" RCP

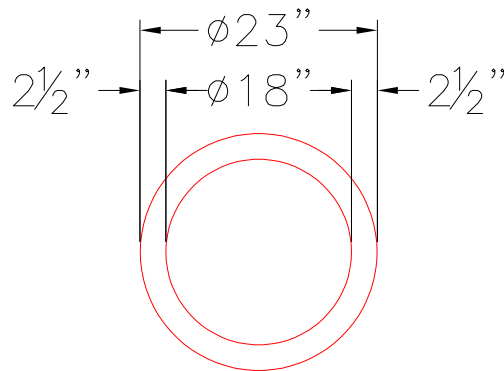

PLAN VIEW

