

Job Name: 26-2217 Kroger COB
Job Location: Bowling Green, KY
Contractor: Stewart Richey

Plant: Beaver Dam
7/21/2026 8:13:05 AM

Tech: J. Coppage
PC: T. Lewis



Structure ID: MH1 ST-MH

P3 GR4

GRADE RING


- P4) 24" - CASTING HEIGHT - 7"
P3) 24" - GRADE RING - 4"
P2) 48" - ECC CONE w/ 24" HOLE - 30"
P1) 48" - MH BASE - 42"
1) CASTING - HOE MC-375 F/C Storm
1) 48" - SGL 1"x14.5' Butyl (2x)
2) Hole - 24
7) MH Step ML-10-TDS-NCR - 10"

- 0 lb
270 lb
2050 lb
3870 lb
271 lb
0 lb
0 lb
0 lb
0 lb
- Structure Notes: .
1. JR HOE MC-375 F/C PROVIDED BY ICAST.
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,500 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


Structure Total: 6461 lb

NOTES:


1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
-CONCRETE: 4,000 PSI @ 28 DAYS.
-REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)

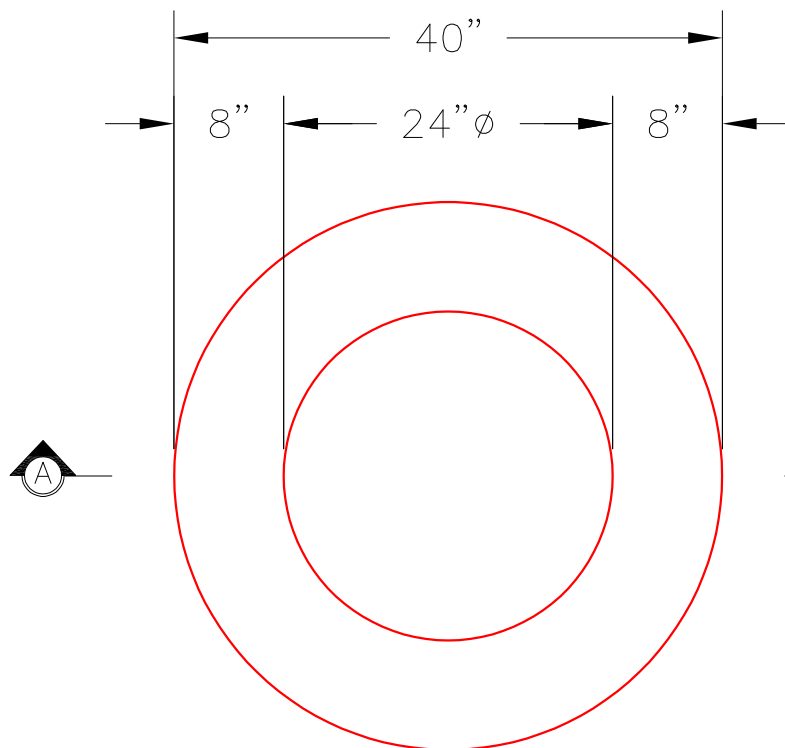

PLAN VIEW

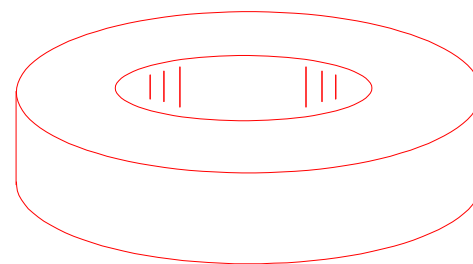

ISOMETRIC VIEW

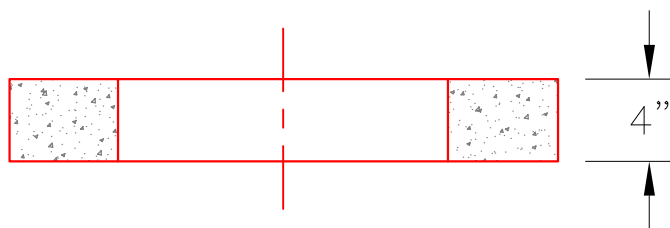

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb
Volume (Net): 0.07cu.yd