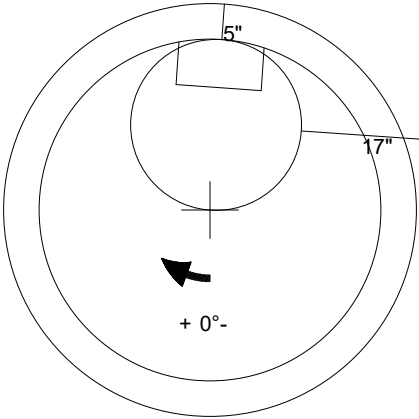



Job Name: 26-2270 - Walmart #299 Fuel Station Job Location: Bowling Green, KY Contractor: Stewart Richey		Plant: 100 8/10/2026 11:48:40 AM	Tech: Jared - F PC: T. Lewis		
Structure ID: 1.1 ST-MH					
P2 MH048CN36		ECC CONE w/ 24" HOLE F/G			
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 4" P2) 48" - ECC CONE w/ 24" HOLE F/G - 36" P1) 48" - MH BASE T/n - 60" 1) CASTING - HOE MC-375 F/C Storm 1) 48" - Conseal CS-102 1.00" 2) 24" - Conseal CS-102 1.00" 3) Hole - 26 8) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 3000 lb 4822 lb 271 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 8363 lb		<u>Structure Notes:</u> . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MC-375 F/C STORM). . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
					
 48" - ECC CONE w/ 24" HOLE F/G - 36" - (P2)					
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 36"	Weight (Net): 3000 lb Volume (Net): 0.5cu.yd	