

Job Name: 26-2270 - Walmart #299 Fuel Station
Job Location: Bowling Green, KY
Contractor: Stewart Richey

Plant: 100

8/10/2026 11:48:41 AM

Tech: Jared - F

PC: T. Lewis



Structure ID: 1.1 ST-MH

P3 GR4

GRADE RING F/F

- P4) 24" - CASTING HEIGHT - 7"
P3) 24" - GRADE RING F/F - 4"
P2) 48" - ECC CONE w/ 24" HOLE F/G - 36"
P1) 48" - MH BASE T/n - 60"
1) CASTING - HOE MC-375 F/C Storm
1) 48" - Conseal CS-102 1.00"
2) 24" - Conseal CS-102 1.00"
3) Hole - 26
8) MH Step ML-10-TDS-NCR - 10"

Structure Total:

0 lb
270 lb
3000 lb
4822 lb
271 lb
0 lb
0 lb
0 lb
0 lb

8363 lb


Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE MC-375 F/C STORM).


REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:

1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
-CONCRETE: 4,000 PSI @ 28 DAYS.
-REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
2. WEIGHT: 4" 270 LBS.

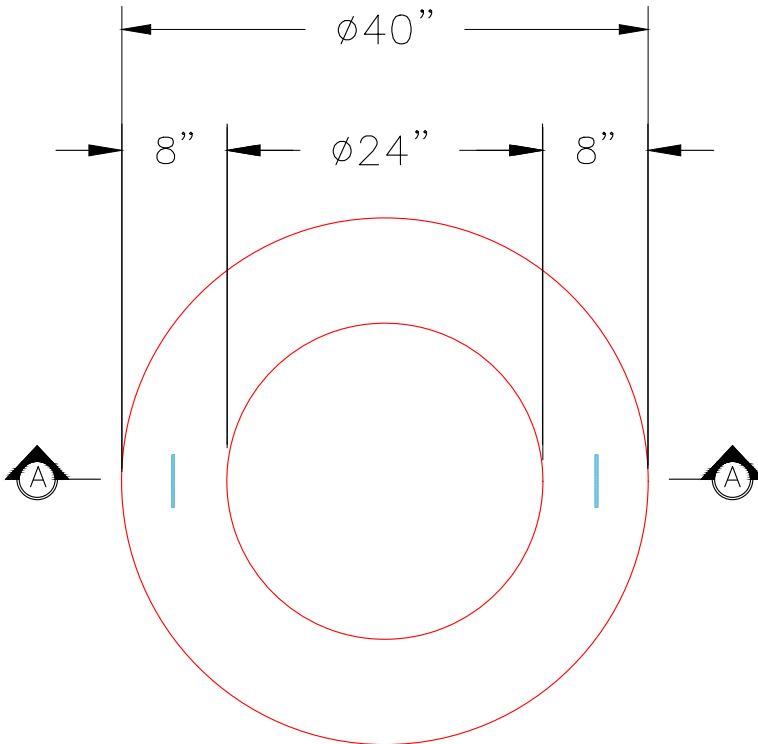


PLAN VIEW

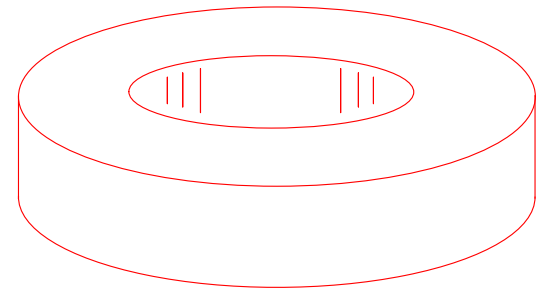

ISOMETRIC VIEW

2X CONAC WRA016 WIRE
ROPE LIFTING ANCHORS

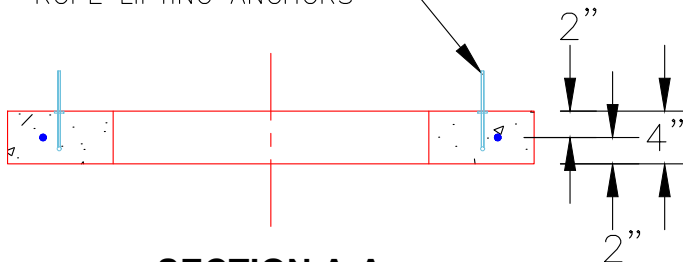

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb
Volume (Net): 0.07cu.yd