

Job Name: 26-2270 - Walmart #299 Fuel Station
Job Location: Bowling Green, KY
Contractor: Stewart Richey

Plant: 100

8/10/2026 11:48:41 AM

Tech: Jared - F

PC: T. Lewis



Structure ID: 1.1.2 ST-CI

P2 MH048LD12S

MH FLAT TOP w/24"x34" Hole F/G

- P3) 24" x 34" - CASTING HEIGHT - 6.5"
P2) 48" - MH FLAT TOP w/24"x34" Hole F/G - 12"
P1) 48" - MH BASE Custom Ht T/n - 64"
1) CASTING - JBS 3080 SET (F/G/H)
1) 48" - Conseal CS-102 1.00"
1) Hole - 26
5) MH Step ML-10-TDS-NCR - 10"

Structure Total:



0 lb
1839 lb
5568 lb
500 lb
0 lb
0 lb
0 lb

7907 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING BY ICAST (JBS 3080 SET (F/G/H)).

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

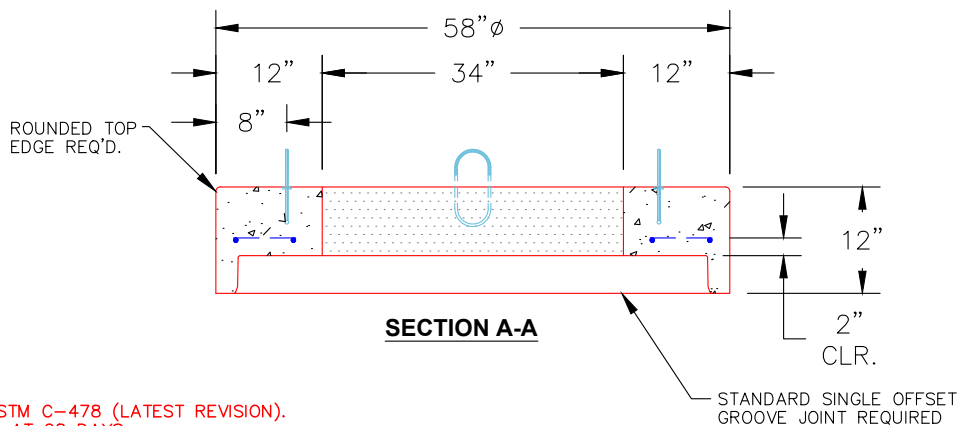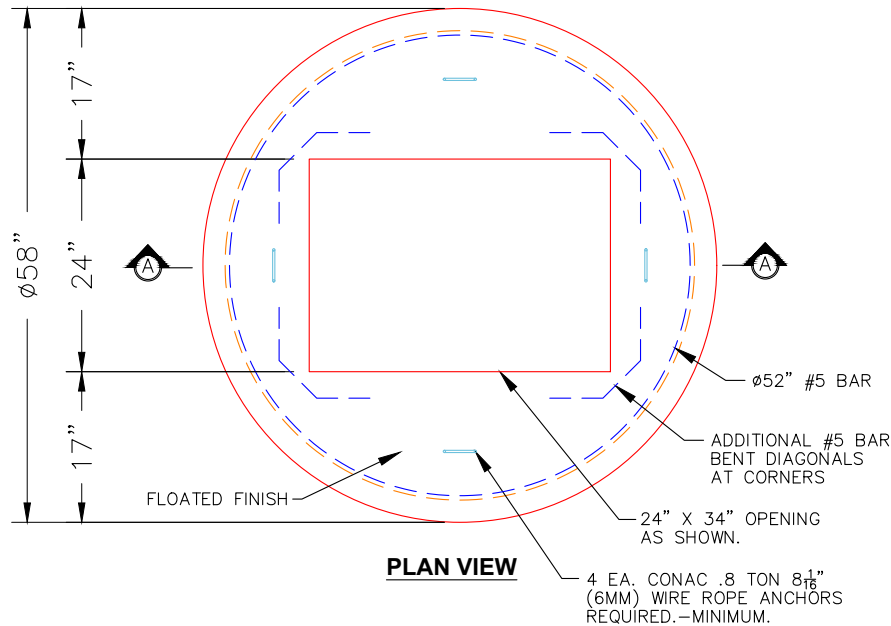

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1839 lb
Volume (Net): 0.47cu.yd