



Job Name: 26-2310 - 3rd & Madison Townhomes - Ph. 1 Job Location: Nashville, TN 37208 Contractor: Hayes Pipe Supply					Plant: 100 6/15/2026 10:58:57 AM		Tech: Jared - F PC: E. Bradley				
Structure ID: A7 ST-CI											
P1 BX2828-06BA48		BOX BASE 6inW, 6inF T/n									
P3) 28" x 28" - CASTING HEIGHT - 7.50" P2) 28" x 28" - BOX RISER 6inW, Variable Ht F/G - 15" P1) 28" x 28" - BOX BASE 6inW, 6inF T/n - 48" 2) 28" x 28" - Conseal CS-102 1.00" 1) Hole - 26 1) Hole - 18						0 lb 1027 lb 3697 lb 0 lb 0 lb 0 lb ----- Structure Total: 4724 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING SUPPLIED BY OTHERS (JBS 3300-V F/G/H - SINGLE CURB INLET). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 426.99' Rim to Invert: 5.72' Slack: 0.636" Sump: 2.496" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	421.27'	0°	20"	18" RCP B WALL	23"	Hole 26	26"	26"	0"	0"	
Invert 2	421.37'	90°	20"	12" HDPE	14.5"	Hole 18	18"	18"	2.5"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

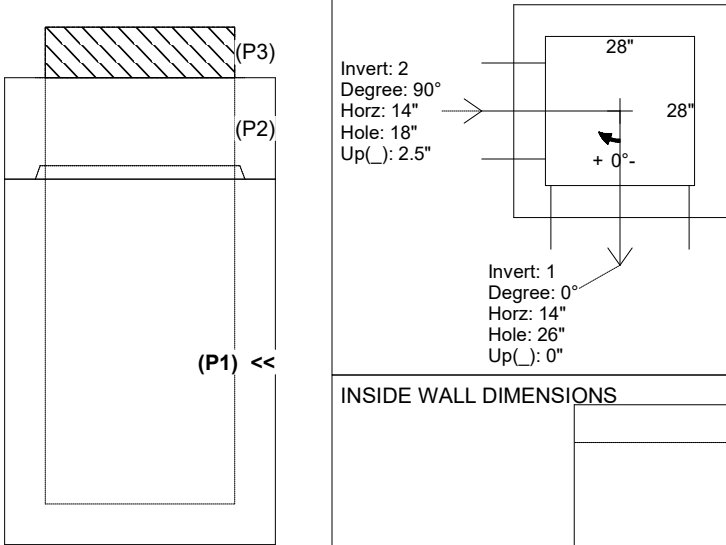


(P1) <<

UPSIDE-DOWN VIEW (int. dimensions)

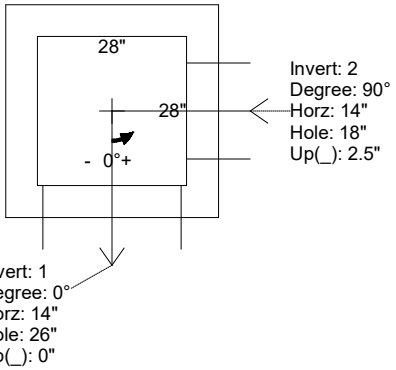

INSIDE WALL DIMENSIONS

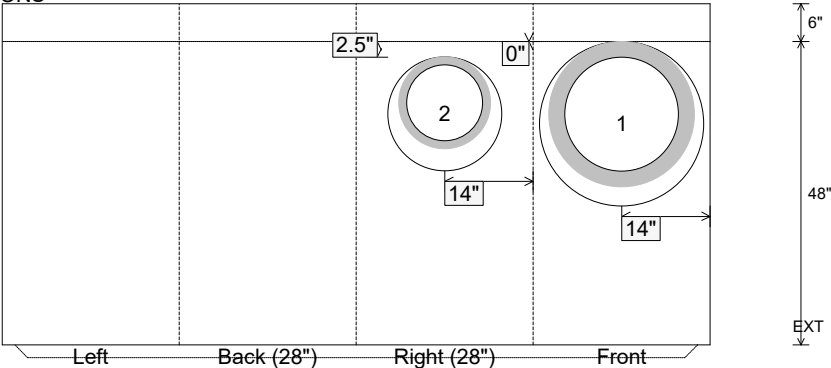

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 48" Height (Ext): 54"	Weight (Net): 3697 lb Volume (Net): 0.94cu.yd
----------------------------------	---------------------------------	--	--	--