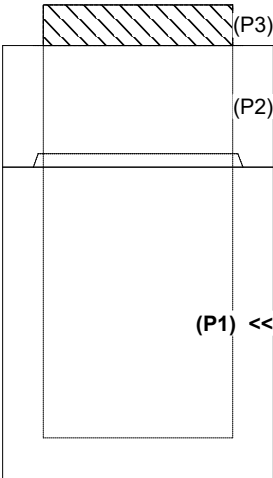


Job Name: 26-2310 - 3rd & Madison Townhomes - Ph. 1 Job Location: Nashville, TN 37208 Contractor: Hayes Pipe Supply					Plant: 100 6/15/2026 10:59:00 AM		Tech: Jared - F PC: E. Bradley				
Structure ID: C2 ST-CB											
P1 BX28280606VH BOX BASE 6inW, 6inF, Variable Ht T/n											
P3) 28" x 28" - CASTING HEIGHT - 6" P2) 28" x 28" - BOX RISER 6inW F/G - 18" P1) 28" x 28" - BOX BASE 6inW, 6inF, Variable Ht T/n - 40" 2) 28" x 28" - Conseal CS-102 1.00" 1) Hole - 14						0 lb 1232 lb 3467 lb 0 lb 0 lb ----- 0 lb Structure Total: 4699 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING SUPPLIED BY OTHERS (JBS 4300 F/G). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 426.82' Rim to Invert: 5.38' Slack: 0.56" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	421.44'	0°	20"	10" HDPE	11.4"	Hole 14	14"	14"	-0.75"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions)											
 INSIDE WALL DIMENSIONS											
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 6" Floor Height: 6"		Height (Int): 40" Height (Ext): 46"		Weight (Net): 3467 lb Volume (Net): 0.89cu.yd		