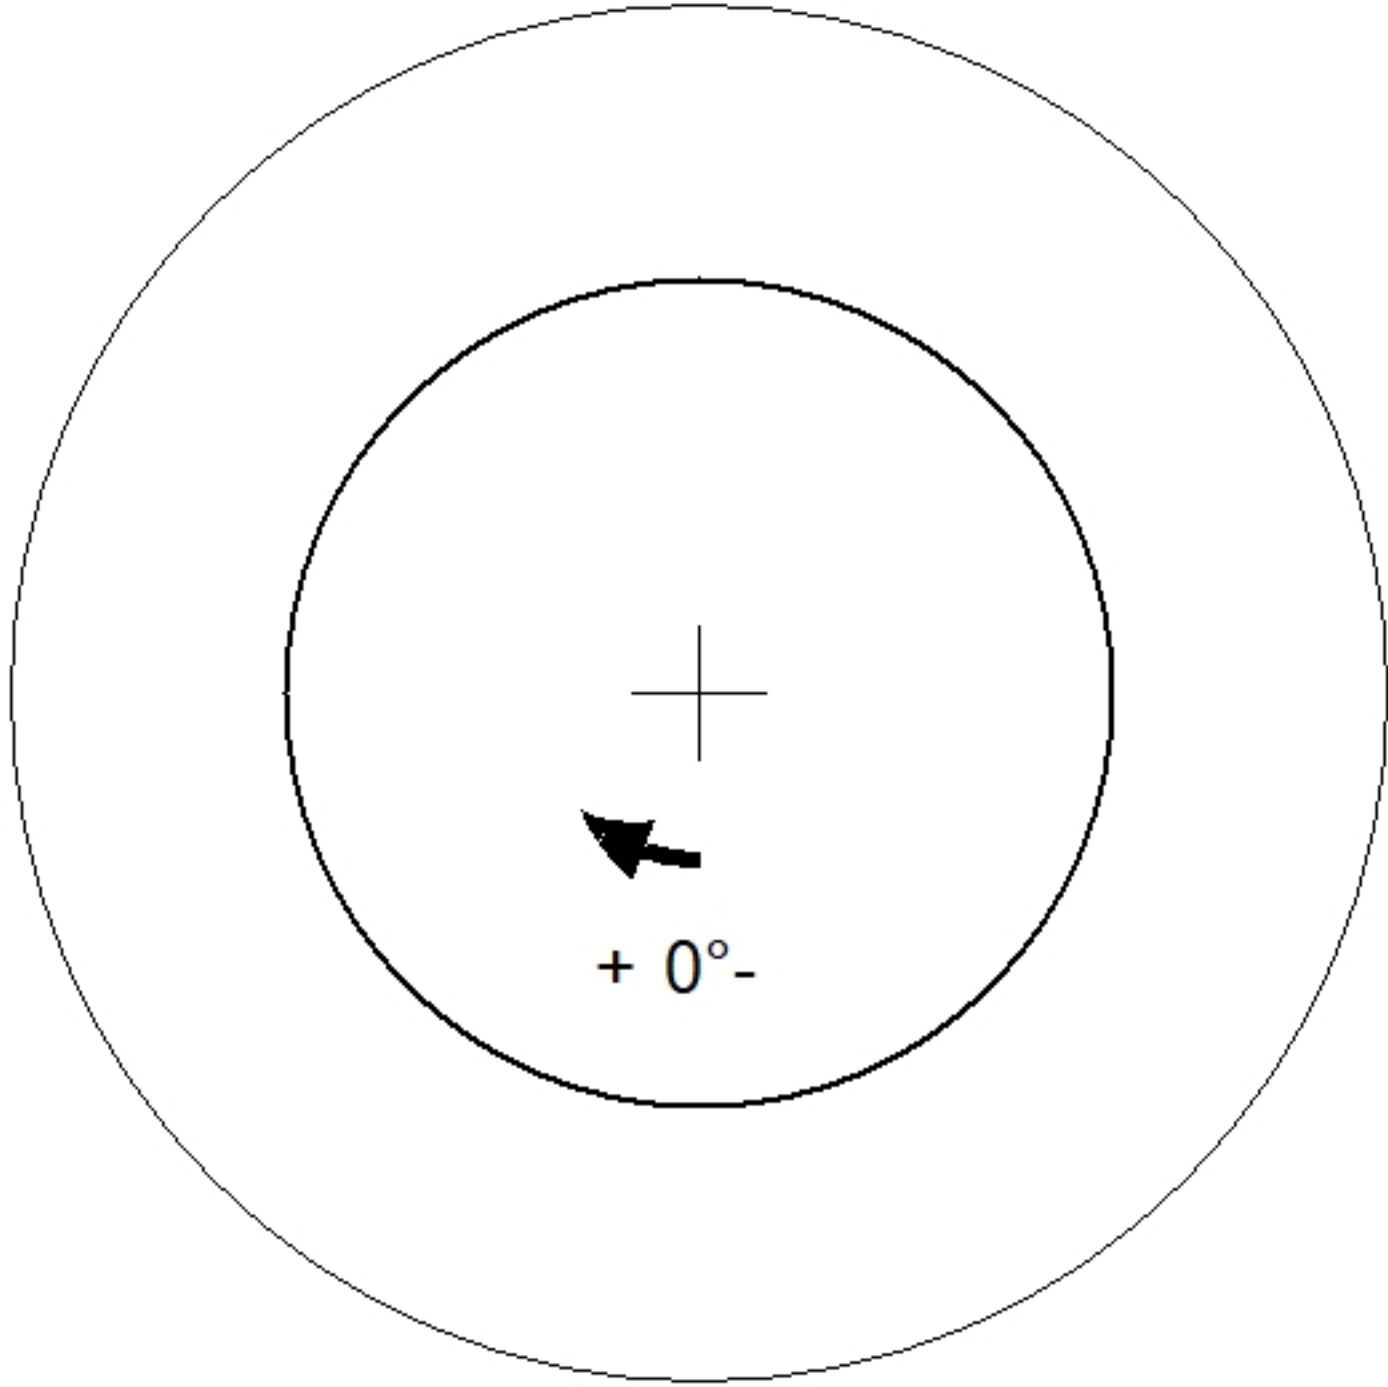


Job Name: 26-2310 - 3rd & Madison Townhomes - Ph. 1		Plant: 100	Tech: Jared - F	
Job Location: Nashville, TN 37208		6/16/2026 8:47:40 AM	PC: E. Bradley	
Contractor: Hayes Pipe Supply				
Structure ID: PMH1 SS-MH				
P3		GR3CDARED		
GRADE RING w/ConBlock-CDA Red				
P4) 24" - CASTING HEIGHT - 7"		0 lb	Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIXTURE = CONBLOCK CDA RED. 4. CASTING SUPPLIED BY OTHERS. . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
P3) 24" - GRADE RING w/ConBlock-CDA Red - 3"		202 lb		
P2) 48" - CON CONE w/24" HOLE, w/ConBlock-CDA Red - 36"		2251 lb		
P1) 48" - MH BASE w/ConBlock-CDA Red - 36"		3701 lb		
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212		0 lb		
1) ADMIXTURE CONBLOCK CDA RED		0 lb		
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)		0 lb		
1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT		1440 lb		
1) 48" - Conseal CS-102 1.00" (Double)		0 lb		
2) 24" - Conseal CS-102 1.00" (Double)		0 lb		
3) PSX - 12-08 NYLO		24 lb		
6) MH Step ML-10-TDS-NCR - 10"		0 lb		
Structure Total:		7619 lb		
				
24" - GRADE RING w/ConBlock-CDA Red - 3" - (P3)				
Coating (Int):	Seam Up: Flat	Wall Thickness: 8"	Height (Ext): 3"	Weight (Net): 202 lb
Coating (Ext):	Seam Dn: Flat			Volume (Net): 0.05cu.yd