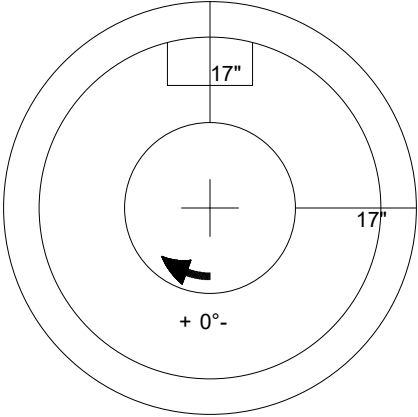



Job Name: 26-2310 - 3rd & Madison Townhomes - Ph. 1 Job Location: Nashville, TN 37208 Contractor: Hayes Pipe Supply		Plant: 100 6/15/2026 11:40:05 AM	Tech: Jared - F PC: E. Bradley		
Structure ID: PMH3 SS-MH					
P2 MH048CCN36CDARED		CON CONE w/24" HOLE, w/ConBlock-CDA Red F/G			
P3) 24" - CASTING HEIGHT - 7" P2) 48" - CON CONE w/24" HOLE, w/ConBlock-CDA Red F/G - 36" P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 18" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) ADMIXTURE CONBLOCK CDA RED 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 1) PSX - 12-08 NYLO 4) MH Step ML-10-TDS-NCR - 10"		0 lb 2251 lb 2540 lb 0 lb 0 lb 0 lb 1440 lb 0 lb 0 lb 8 lb 0 lb ----- 6239 lb	Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. ADMIXTURE = CONBLOCK CDA RED. 4. CASTING SUPPLIED BY OTHERS. . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
					
					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 36"	Weight (Net): 2251 lb Volume (Net): 0.57cu.yd