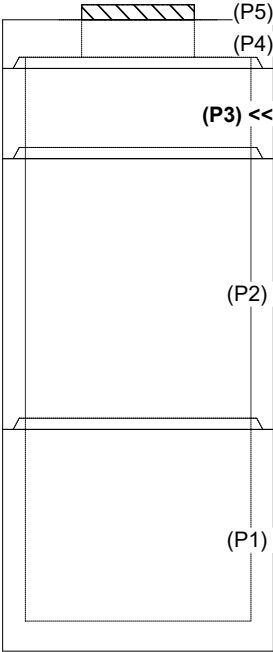

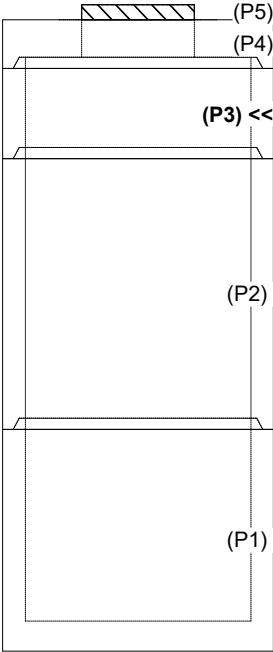
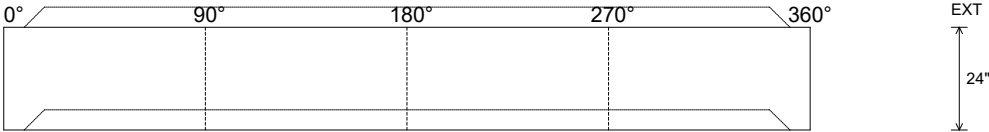


Job Name: 26-2478 - Marcelina Site Improvements (Storm) Job Location: Clarksville, TN 37043 Contractor: Core & Main LP					Plant: Beaver Dam, KY 10/8/2026 8:36:10 AM		Tech: J. Coppage PC: T. Lewis					
Structure ID: S1 ST-AD												
P3		MH060RS24		MH RISER								
P5) 30" x 30" - CASTING HEIGHT - 4" P4) 60" - MH FLAT TOP w/30"x30" Hole - 13" P3) 60" - MH RISER - 24" P2) 60" - MH RISER SPECIAL - 72" P1) 60" - MH BASE Custom Ht - 51" 3) 60" - Conseal CS-102 1.00" 1) 30" x 30" - Conseal CS-102 1.00" 2) Hole - 44 12) MH Step ML-10-TDS-NCR - 10"					0 lb 2400 lb 2505 lb 6675 lb 7216 lb 0 lb 0 lb 0 lb 0 lb ----- 18796 lb		Structure Notes: . 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: - FLAT LID: #5 BAR @ 6" C.C. E.W. (GRADE 60) - BASE & RISERS: PER ASTM A615 4. NO INVERT CHANNEL 5. STEPS AT 90 DEGREES 6. 4" CASTING SUPPLIED BY OTHERS					
Rim: 517.4'					Rim to Invert: 13.6'		Slack: 2.05"		Sump: 2.85"		Step Position: 90°	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
												
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 6" Floor Height: 0"		Height (Int): 24" Height (Ext): 24"		Weight (Net): 2505 lb Volume (Net): 0.64cu.yd			