

Contractor: Core & Main LP

Plant: Beaver Dam, KY



Size: 36" x 96"

Rim to Invert: 10.32'

Floor Height: 8"


Slack: 0.34"

1. PER ASTM C-913 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT:
 - TRANS SLAB - DOUBLE MAT
 - TOP MAT - W/ #4 BARS AT 12" C.C.E.W.
 - BOT MAT - W/ #5 BARS AT 6" C.C.E.W.
 - WALLS (As .47) #5 BARS AT 8" C.C.E.W.
 - BASE: #5 BAR @ 12" C.C. E.W. (GRADE 60)
4. NO INVERT CHANNEL
5. STEPS AT 0 DEGREES
6. 6.5" CASTING SUPPLIED BY OTHERS

9) MH Step ML-10-TDS-NCR - 10"



0 lb

Structure Total: 20035 lb

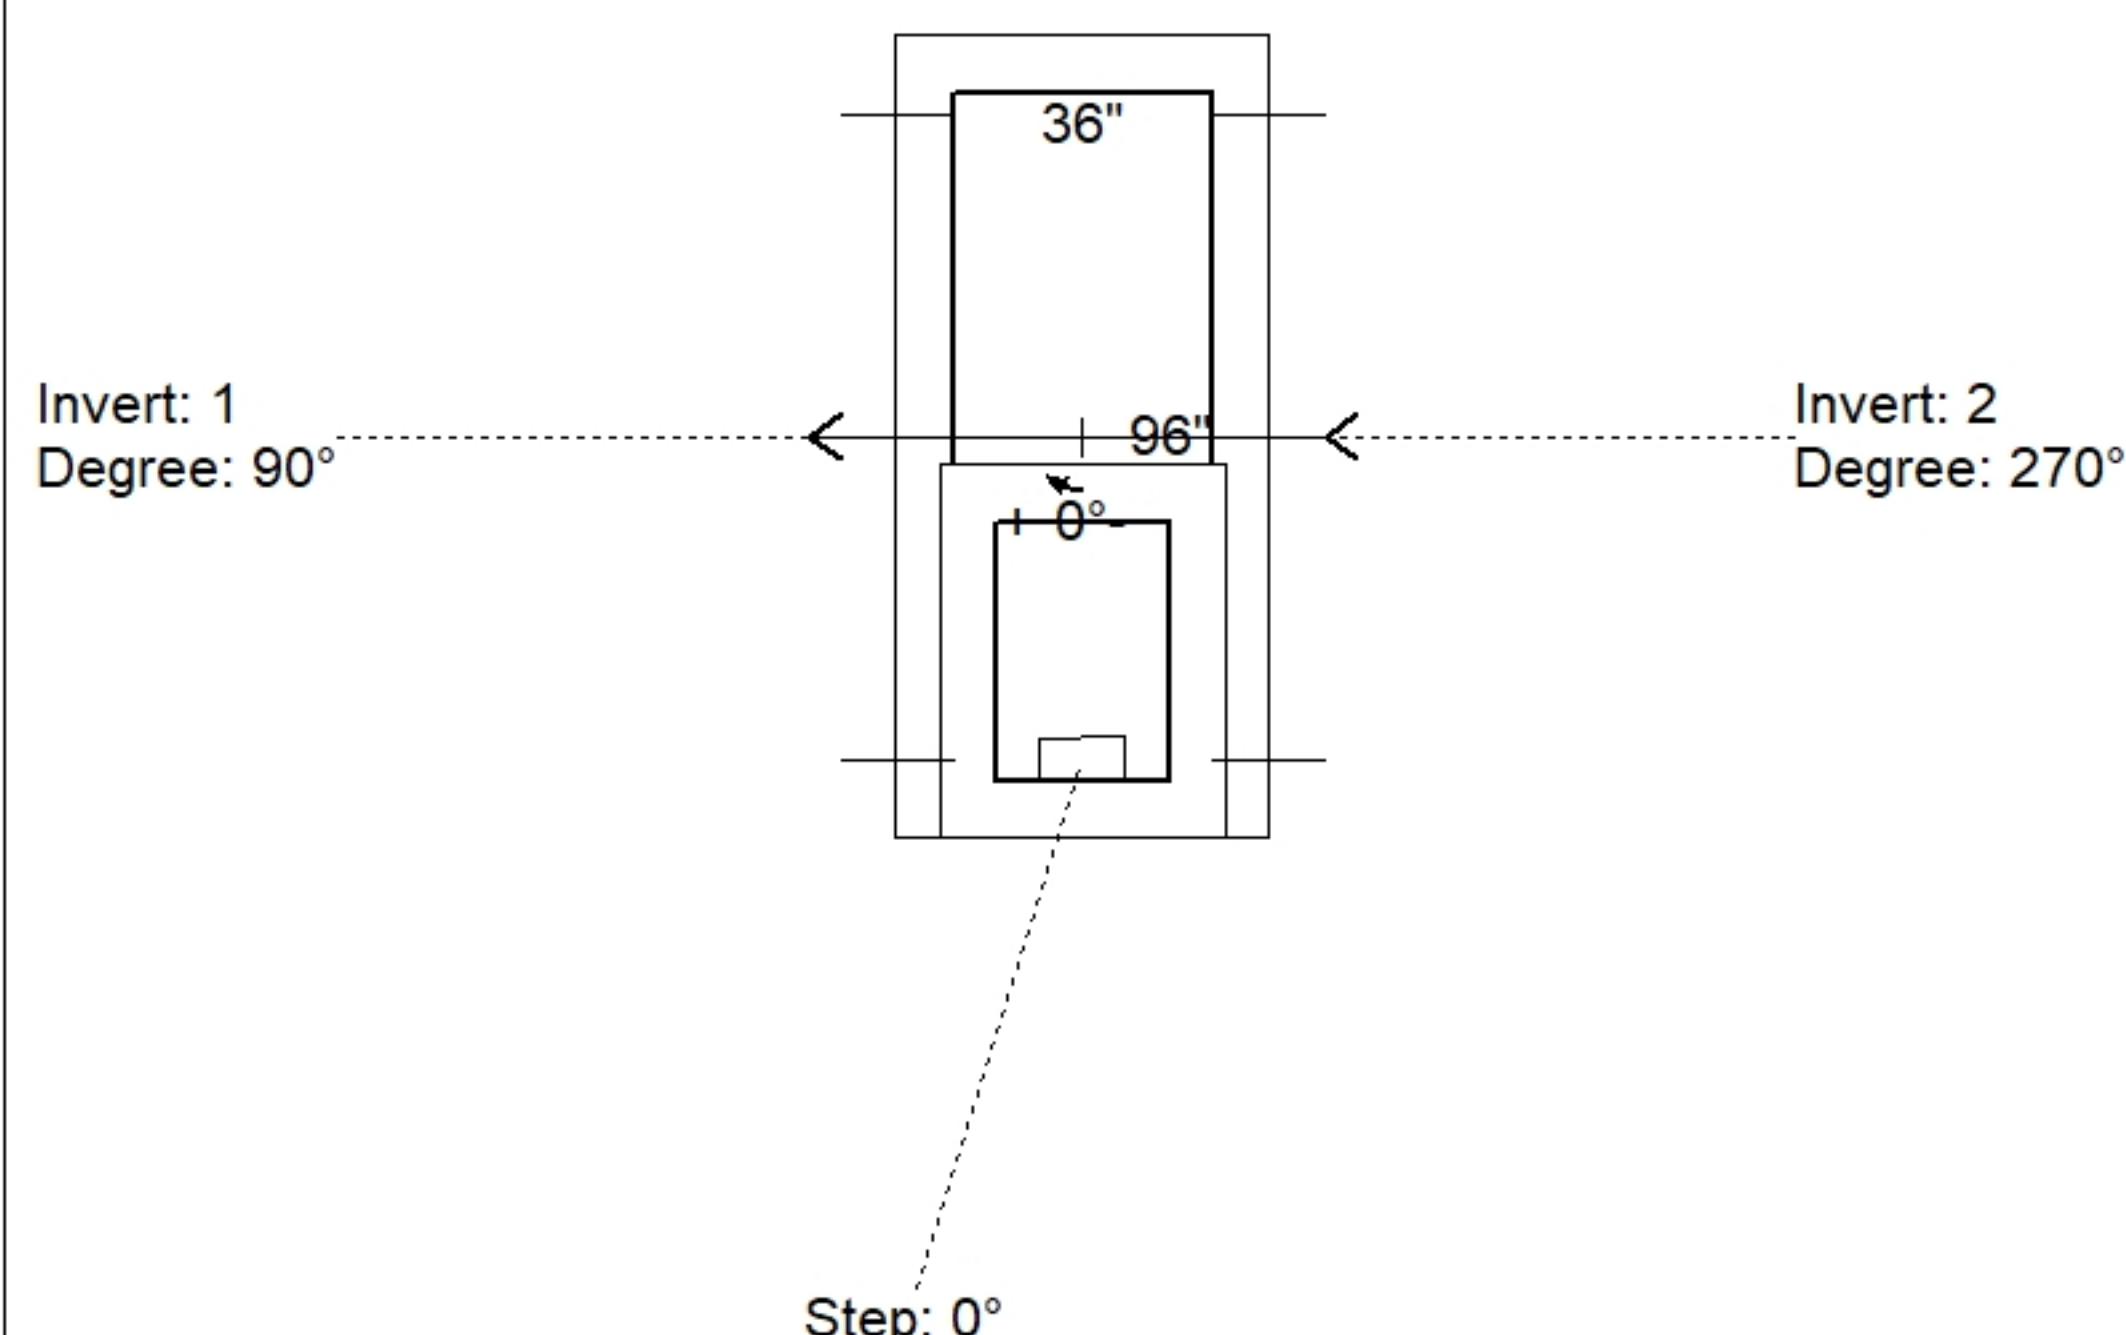

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	478'							
Reducer	475.43'							
Invert 1	467.68'	90°	72" RCP B WALL	86"	90"	Hole 90	-4"	P1
Invert 2	467.68'	270°	72" RCP B WALL	86"	90"	Hole 90	-4"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

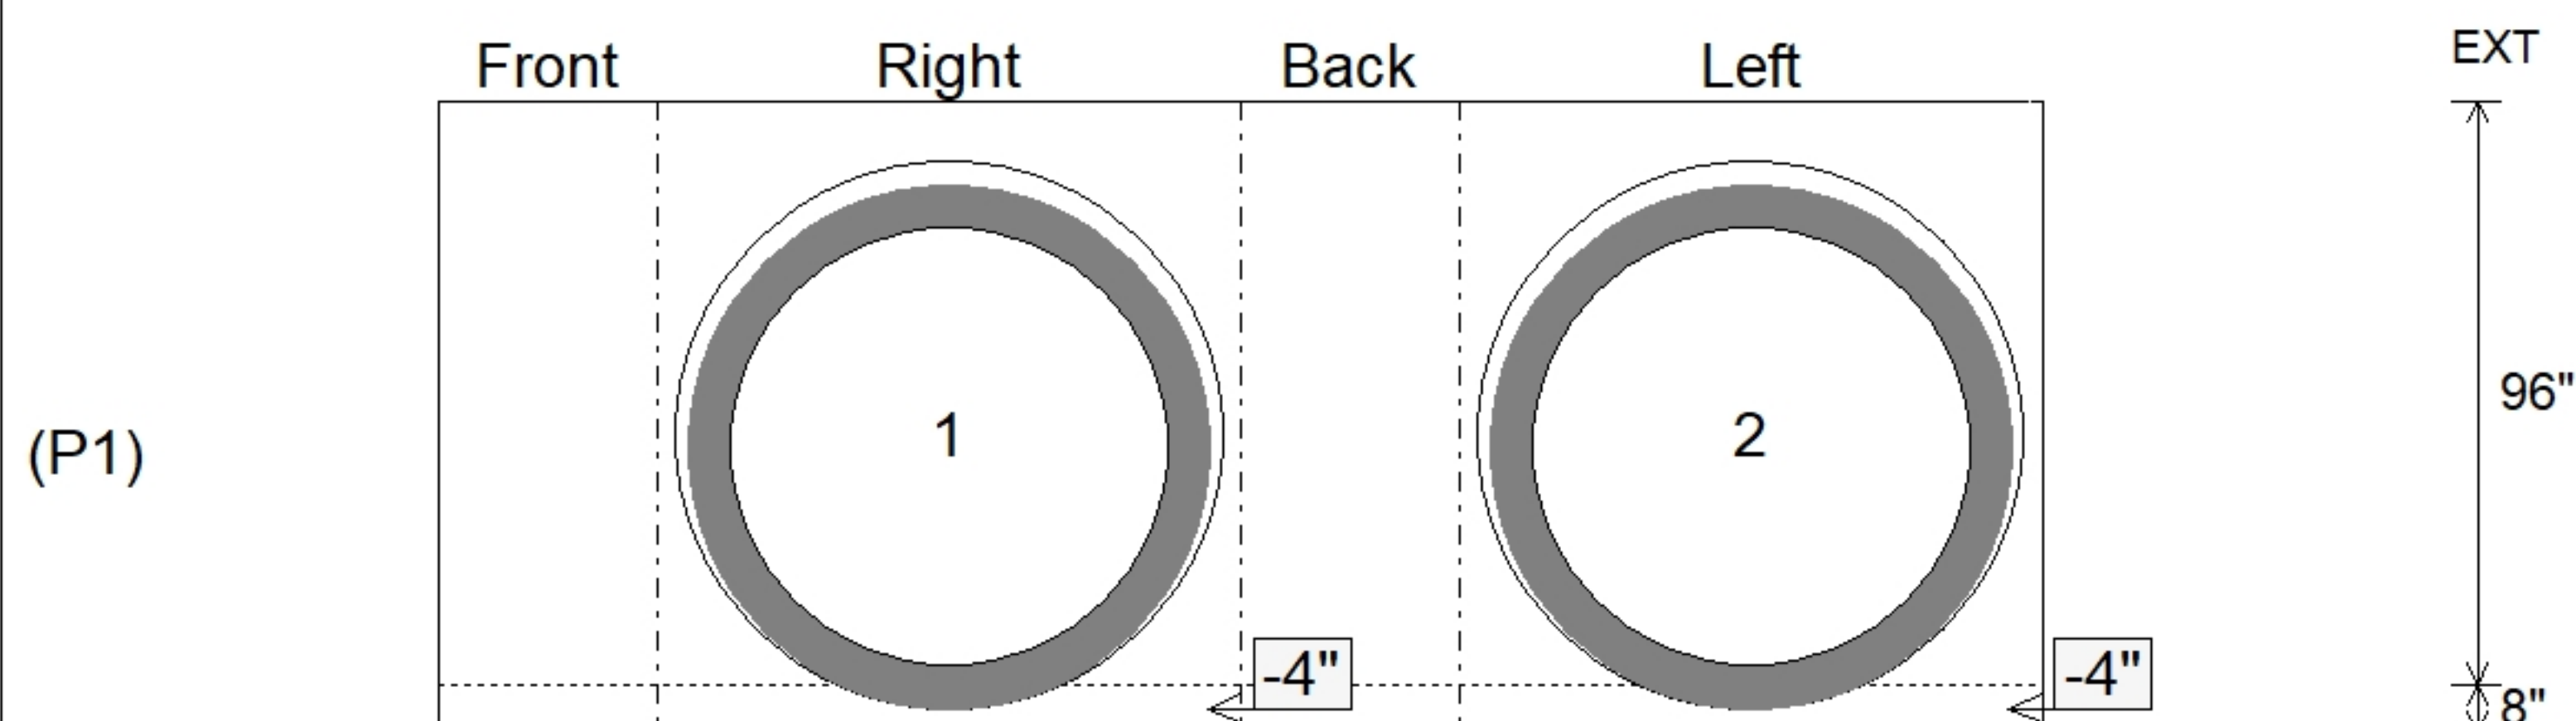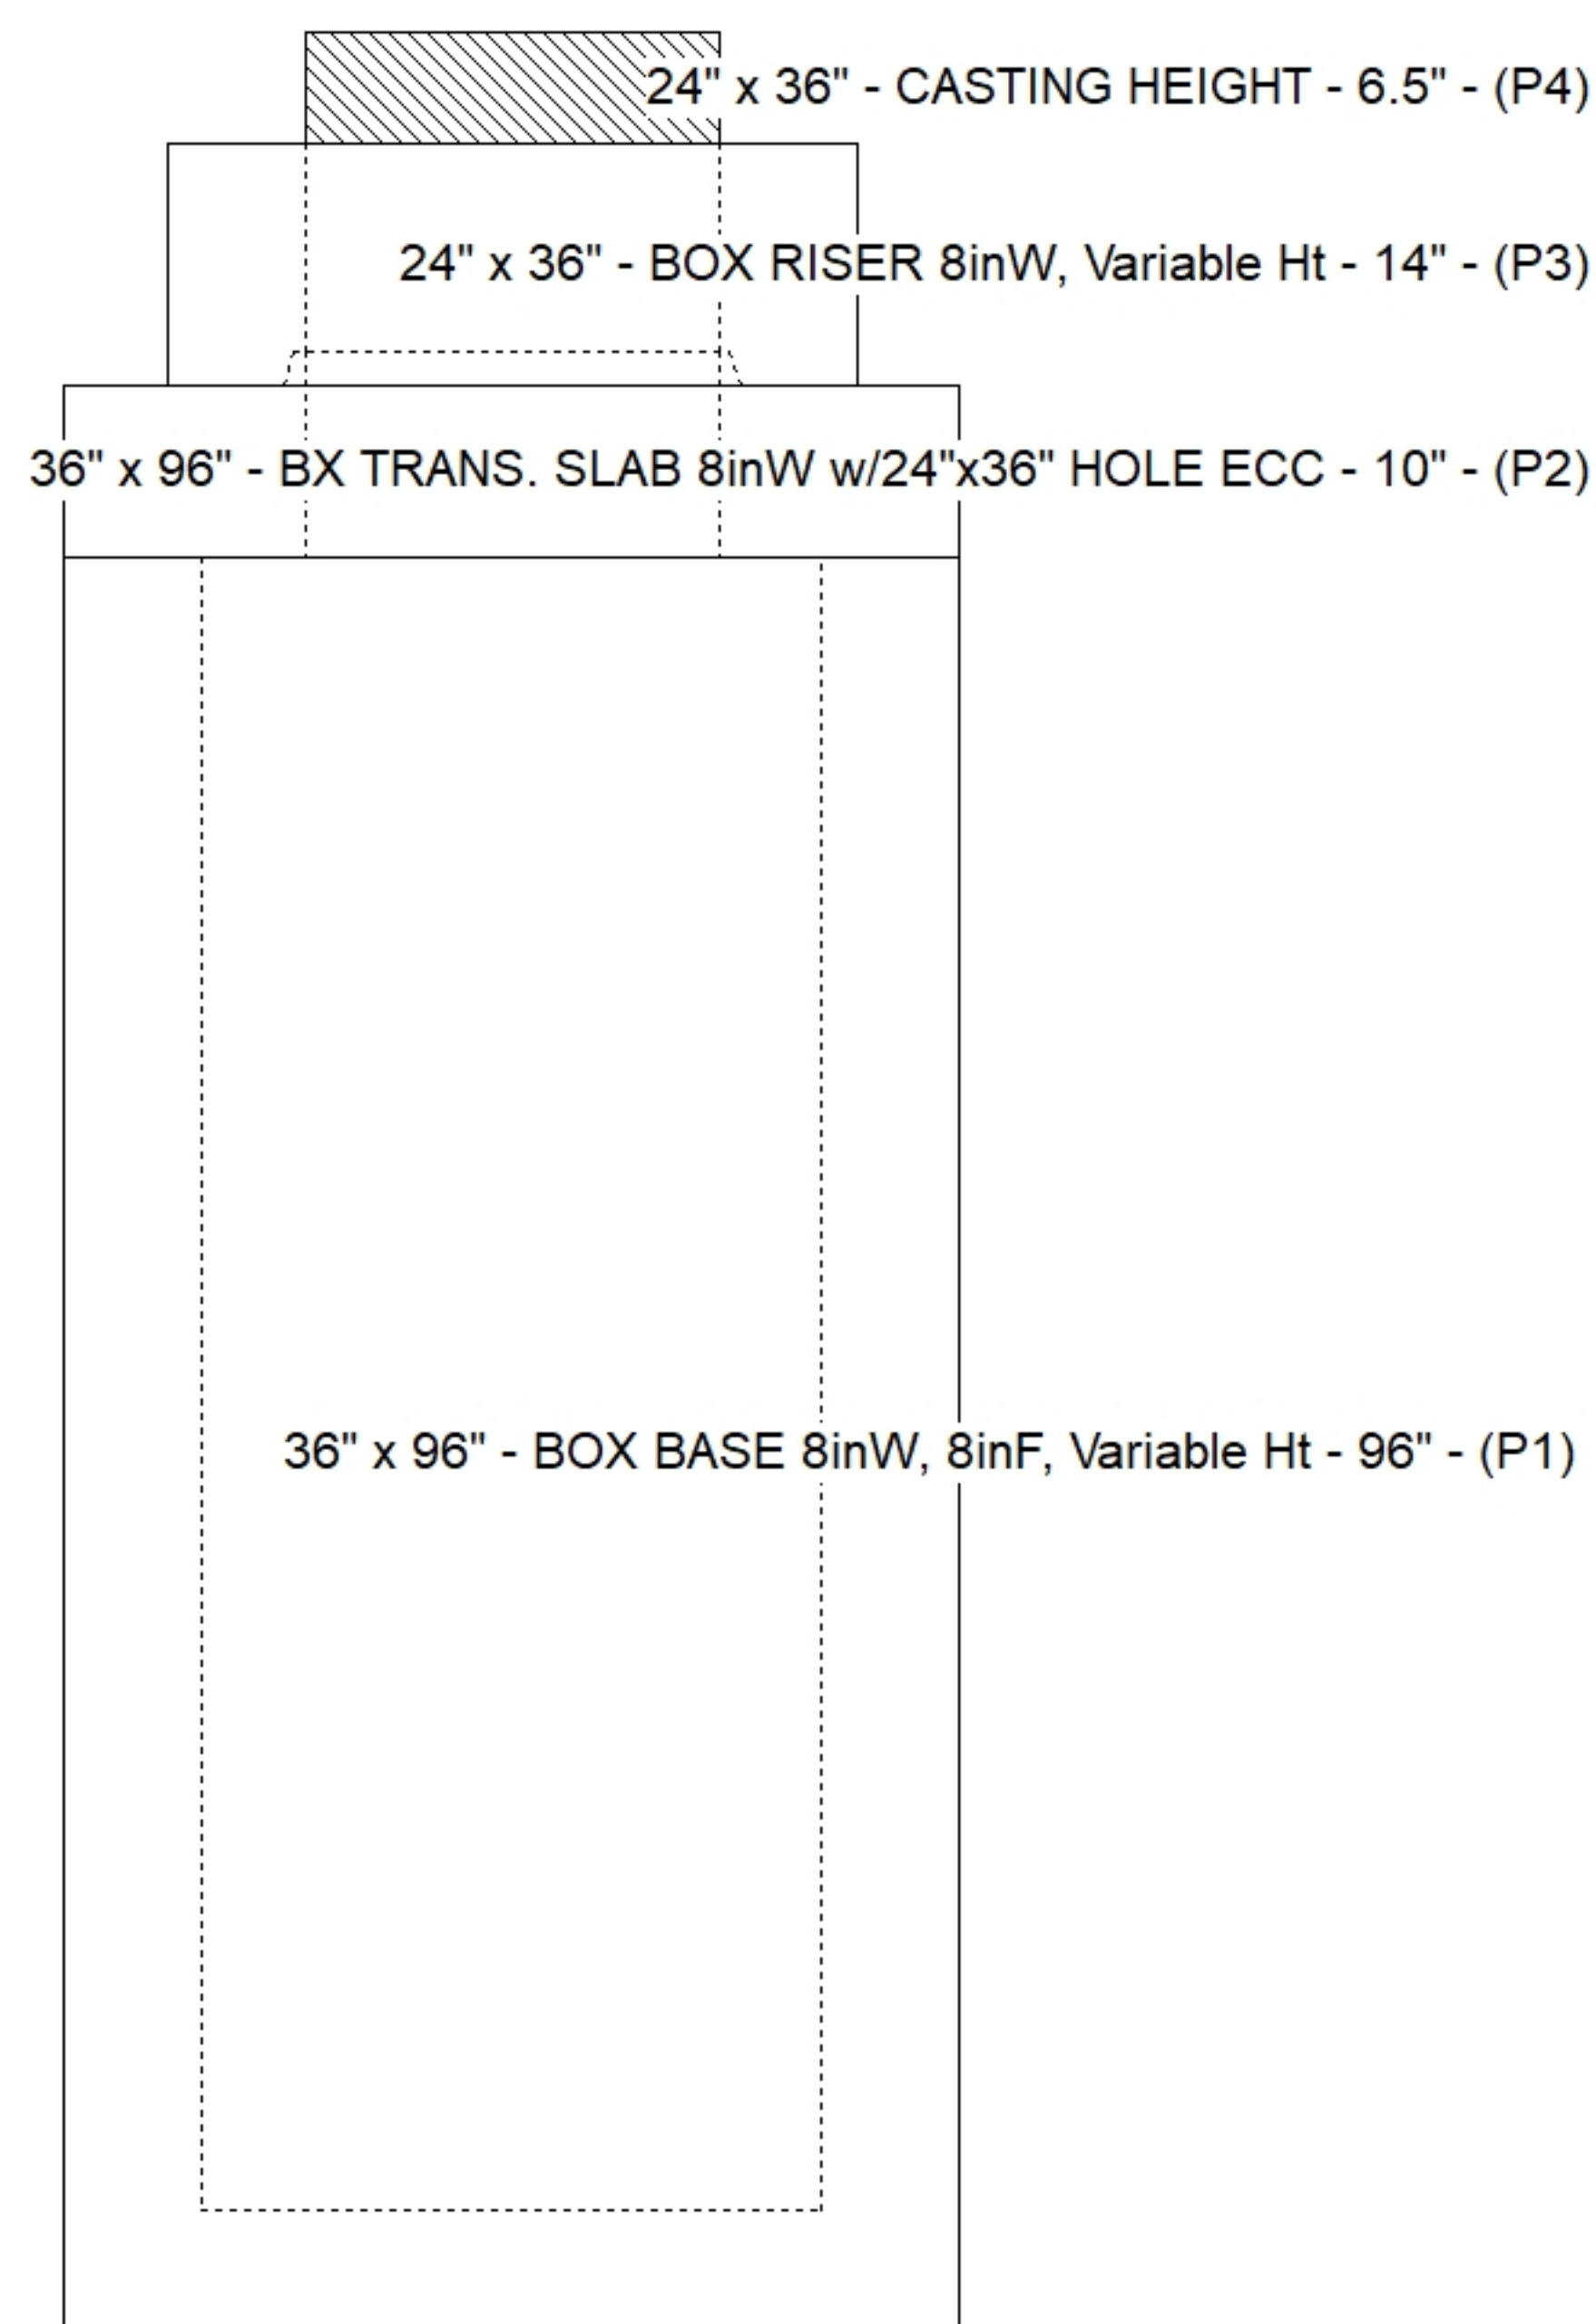

SUBMITTAL
APPROVED BY: