




Job Name: 26-2478 - Marcelina Site Improvements (Storm) Job Location: Clarksville, TN 37043 Contractor: Core & Main LP				Plant: Beaver Dam, KY 10/8/2026 8:24:49 AM		Tech: J. Coppage PC: T. Lewis				
Structure ID: T0 ST-CI										
P1		BX2472-08BAVF								
BOX BASE 8inW, 8inF, Variable Ht										
P2) 24" x 72" - CASTING HEIGHT - 6.5" P1) 24" x 72" - BOX BASE 8inW, 8inF, Variable Ht - 42" 1) 24" x 72" - Conseal CS-102 1.00" 1) Hole - 24"						0 lb 8451 lb 0 lb 0 lb ----- 8451 lb		Structure Notes: . 1. PER ASTM C-913 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) 4. NO STEPS & NO INVERT CHANNEL 5. 2 EA. 6.5" CASTINGS SUPPLIED BY OTHERS		
Rim: 513.8' Rim to Invert: 4.13' Slack: 1.06" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	509.67'	0°	20"	18" HDPE	21.2"	Hole 24	24"	24"	-1.6"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

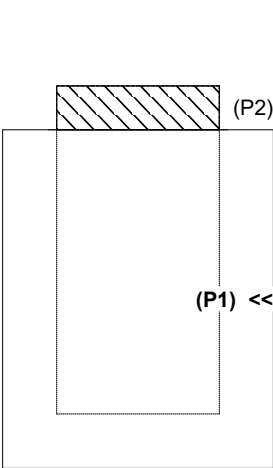

RIGHT-SIDE UP VIEW (int. dimensions)



INSIDE WALL DIMENSIONS

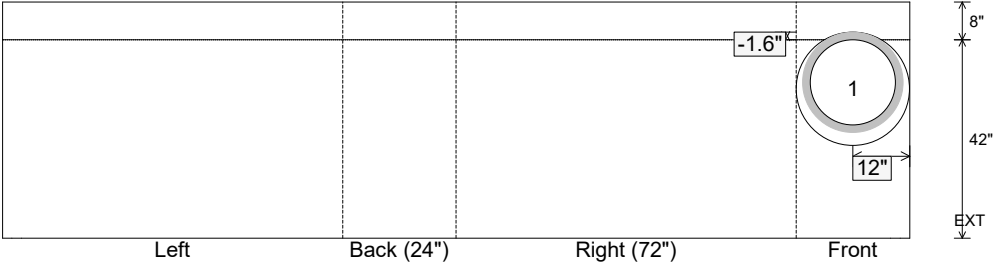

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 42" Height (Ext): 50"	Weight (Net): 8451 lb Volume (Net): 2.16cu.yd
----------------------------------	-------------------------------	--	--	--