

Job Name: 26-2478B - Marcelina Site Improvements San.
Job Location: Clarksville, TN 37043
Contractor: Core & Main LP

Plant: Beaver Dam

Tech: J. Coppage

9/14/2026 4:53:45 PM

PC: T. Lewis



Structure ID: FS9 SS-MH

P5 GR6CDARED

GRADE RING w/ConBlock-CDA Red F/F


P6) 24" - CASTING HEIGHT - 6"
P5) 24" - GRADE RING w/ConBlock-CDA Red F/F - 6"
P4) 60" - MH FLAT TOP w/24" Hole ECC w/ConBlock-CDA Red F/G - 13"
P3) 60" - MH RISER w/ConBlock-CDA Red T/G - 72"
P2) 60" - MH RISER w/ConBlock-CDA Red T/G - 60"
P1) 60" - MH BASE Custom Ht. w/ConBlock-CDA Red T/n - 32"
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) 60" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT
3) 60" - Conseal CS-102 1.00" (Double)
2) 24" - Conseal CS-102 1.00" (Double)
2) PSX - 16Y NYLO
1) PSX - 12-08 NYLO
13) MH Step ML-10-TDS-NCR - 10"

0 lb
405 lb
2800 lb
7459 lb
6264 lb
5869 lb
0 lb
0 lb
2962 lb
0 lb
0 lb
16 lb
8 lb
0 lb


Structure Total: 25783 lb

Structure Notes:


1. PER ASTM C-478 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: (1) #3 HOOP CENTERED (GRADE 60)
4. CONBLOCK CDA RED ADMIXTURE REQUIRED

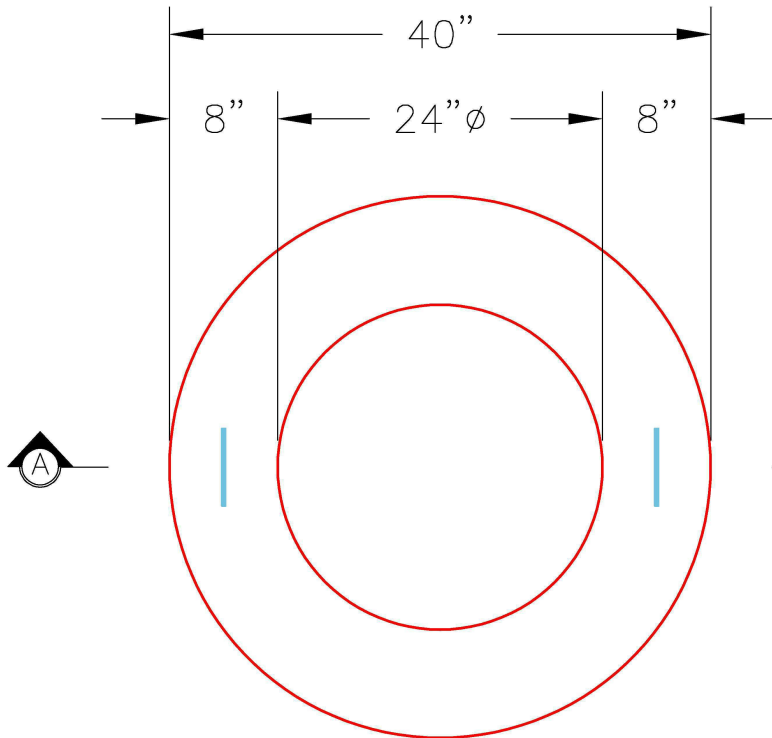

PLAN VIEW

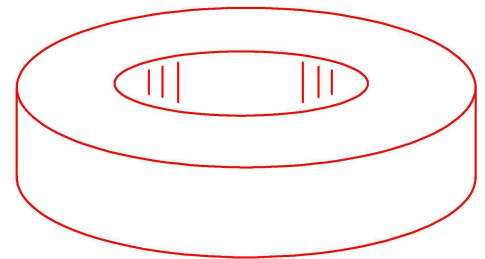

ISOMETRIC VIEW

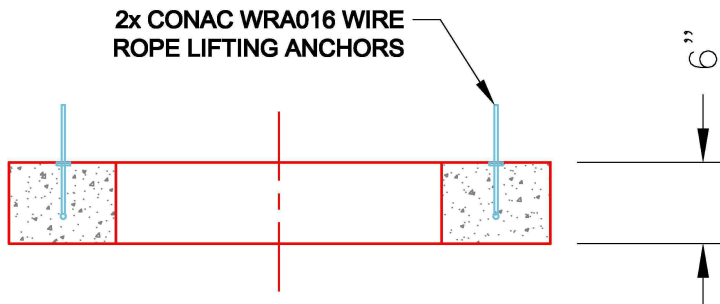

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 6"

Weight (Net): 405 lb
Volume (Net): 0.1cu.yd