Job Name: 26-2480 - Jimmy Risinger Construction Job Location: Louisville, KY 40219 Contractor: Bill Risinger Construction	Plant: Beaver Dam, KY 6/8/2026 11:35:11 AM	Tech: K. Cardwell PC: J. Jarvis	

Structure ID: 1000 Gal OWS

P2 BX60120-06LD08 CB FLAT TOP 6"W w/(2) 24" HOLES (OWS) F/F

P3) 24" - CASTING HEIGHT - 4"	0 lb
P2) 60" x 120" - CB FLAT TOP 6"W w/(2) 24" HOLES (OWS) F/F - 8"	5775 lb
P1) 60" x 120" - BOX BASE 6inW, 6inF F/n - 54"	16120 lb
1) SECONDARY POUR - Baffle Wall	975 lb
2) CASTING - HOE MC-285 F/C Plain	568 lb
1) 60" x 120" - Conseal CS-440 1.00"	0 lb
1) 24" - Conseal CS-440 1.00"	0 lb
2) Kor-N-Seal1 - S406-10.5W	13 lb
Structure Total:	23451 lb

Structure Notes:

1. PER ASTM C-890-13 & ASTM C-913 SPECIFICATIONS
2. CONCRETE: 4,500 PSI AT 28 DAYS
3. REINFORCEMENT: #5 BAR @ 8" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. 2 EA. HOE MC-285 FRAMES & COVERS SUPPLIED BY ICAST
5. LIFTERS: 4 EA. 5CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN
6. TOP SURFACE TO RECEIVE FLOATED FINISH

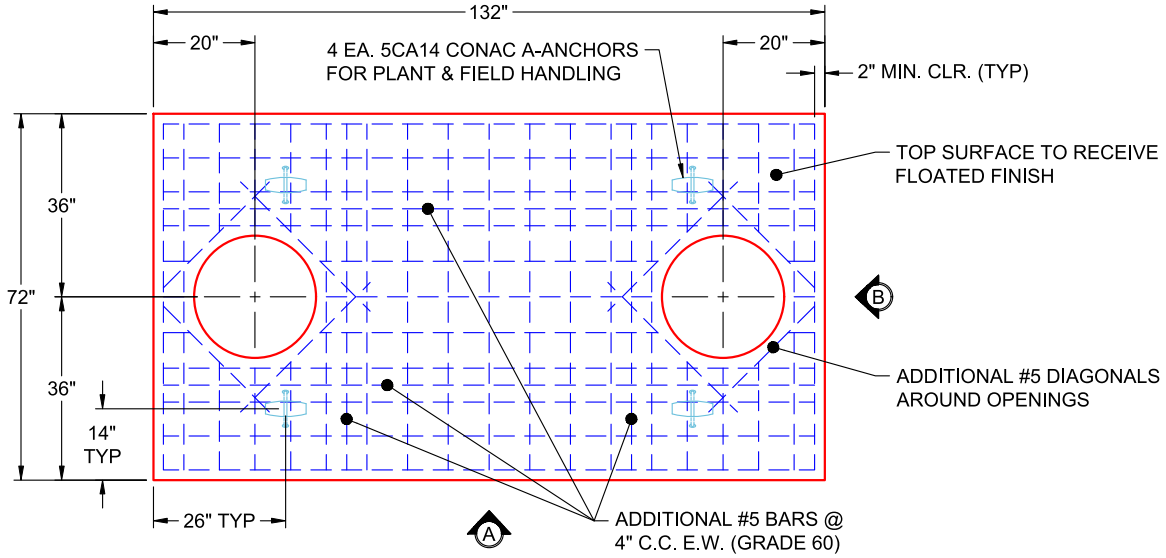

PLAN VIEW
(RIGHT SIDE UP)

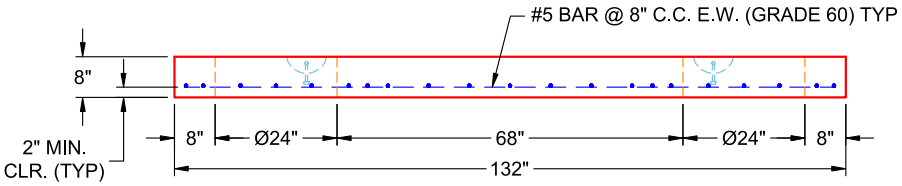

VIEW A
(RIGHT SIDE UP)

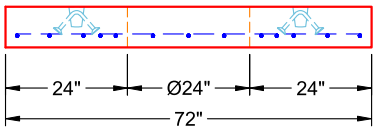

VIEW B
(RIGHT SIDE UP)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 6"	Height (Ext): 8"	Weight (Net): 5775 lb Volume (Net): 1.48cu.yd