



Job Name: 26-2484 Bass Pro Shops Outpost Paducah Job Location: Paducah, KY Contractor: Central Paving Co. of Paducah, Inc.					Plant: Beaver Dam 7/13/2026 9:58:51 AM		Tech: S. Felletter PC: A. Chambers						
Structure ID: X1 ST-JB													
P2			MH048RS72			MH RISER T/G							
P5) 24" - CASTING HEIGHT - 7" P4) 24" - GRADE RING F/F - 4" P3) 48" - ECC CONE w/ 24" HOLE F/G - 30" P2) 48" - MH RISER T/G - 72" P1) 48" - MH BASE T/n - 12" 1) CASTING - HOE MC-375 F/C Storm 2) 48" - Conseal CS-102 1.00" 2) 24" - Conseal CS-102 1.00" 3) Hole - 30 10) MH Step ML-10-TDS-NCR - 10"						0 lb 270 lb 2050 lb 4082 lb 2169 lb 271 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 8841 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-375 F/C). . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 370.07' Rim to Invert: 8.57' Slack: 1.84" Sump: 24" Step Position: 169°													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset			
Invert 1	363.23'	0°	0"	24" HDPE	27.8"	Hole 30	30"	32.406"	26.61"	0"			
Invert 2	363.23'	90°	45.553"	24" HDPE	27.8"	Hole 30	30"	32.406"	26.61"	0"			
Invert 3	361.5'	248°	125.524"	24" HDPE	27.8"	Hole 30	30"	32.406"	5.85"	0"			
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													

RIGHT-SIDE UP VIEW (int. dimensions)

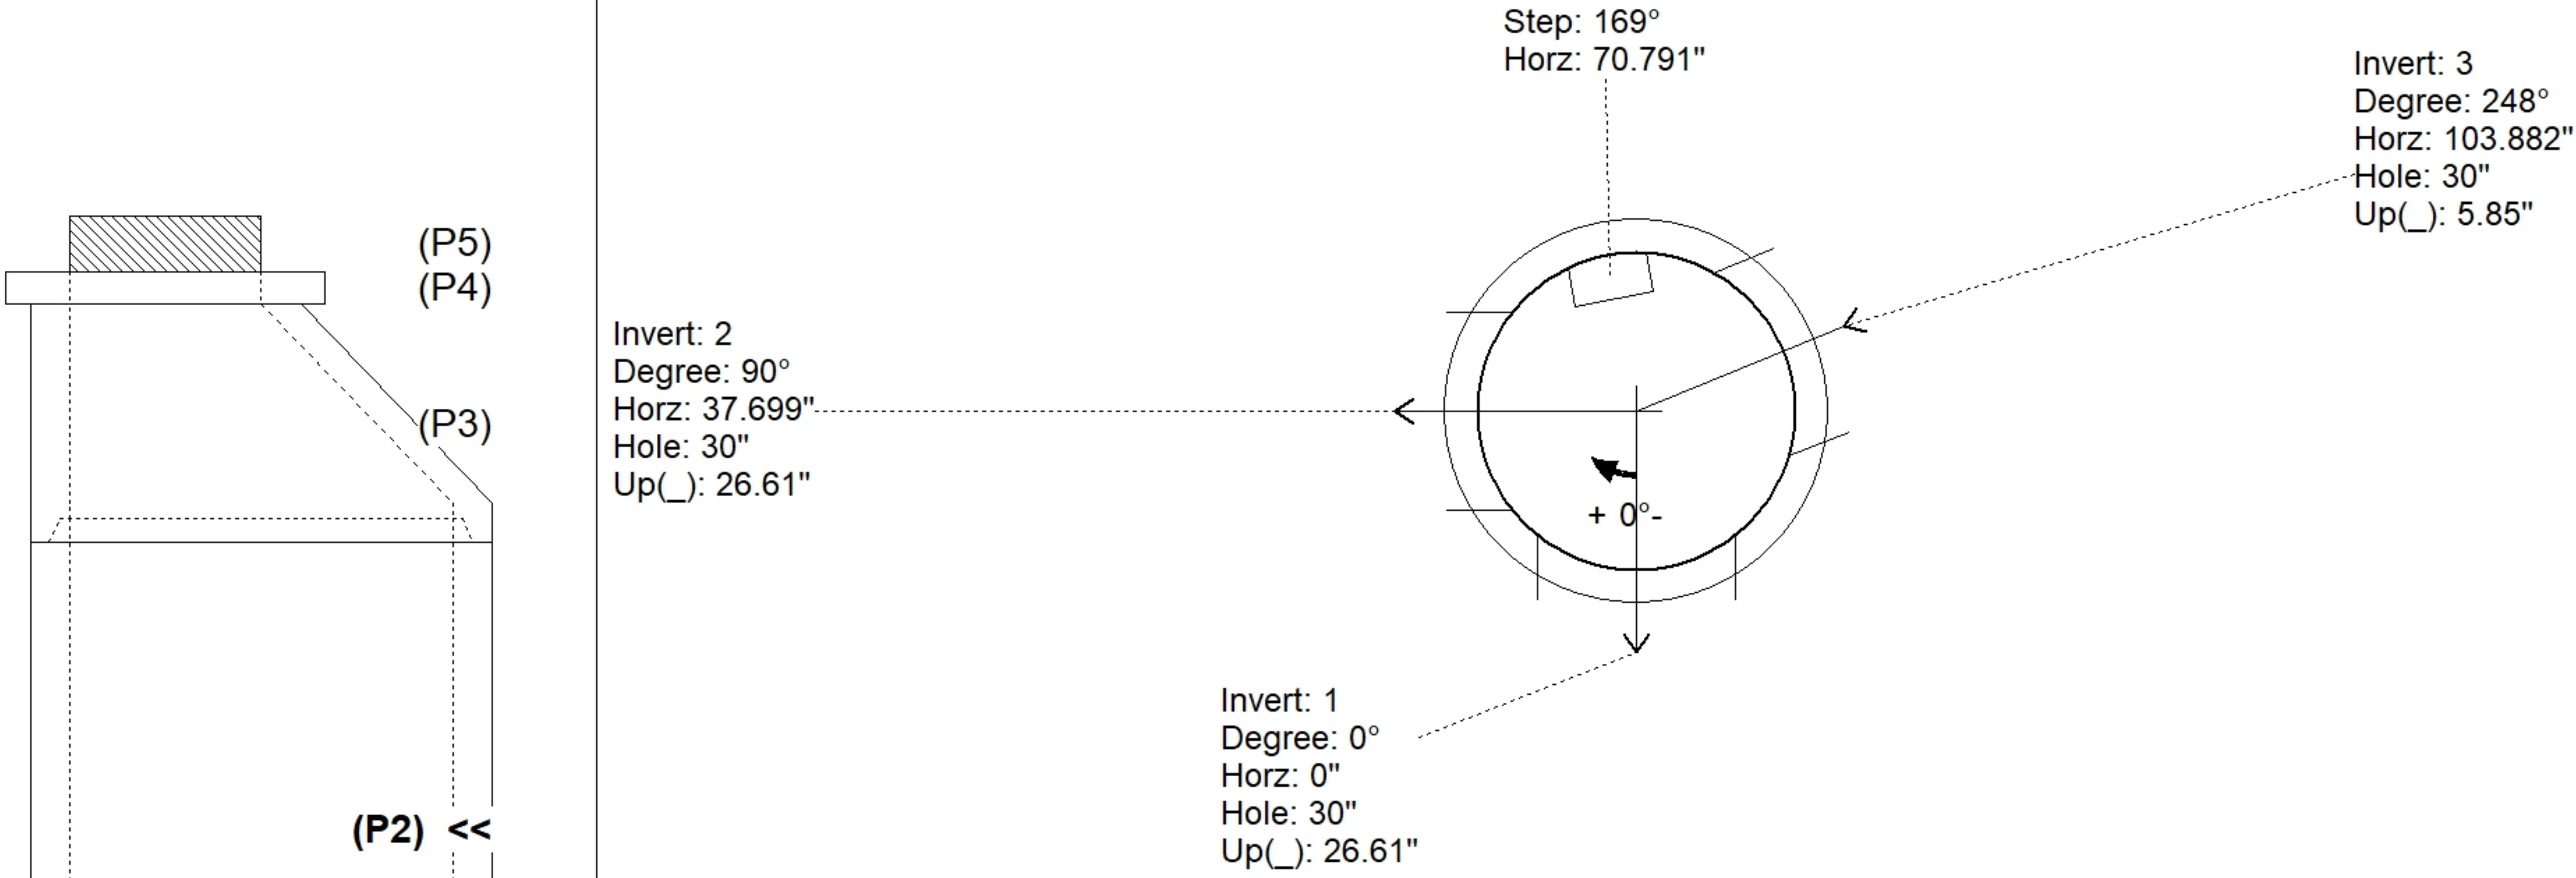

INSIDE WALL DIMENSIONS

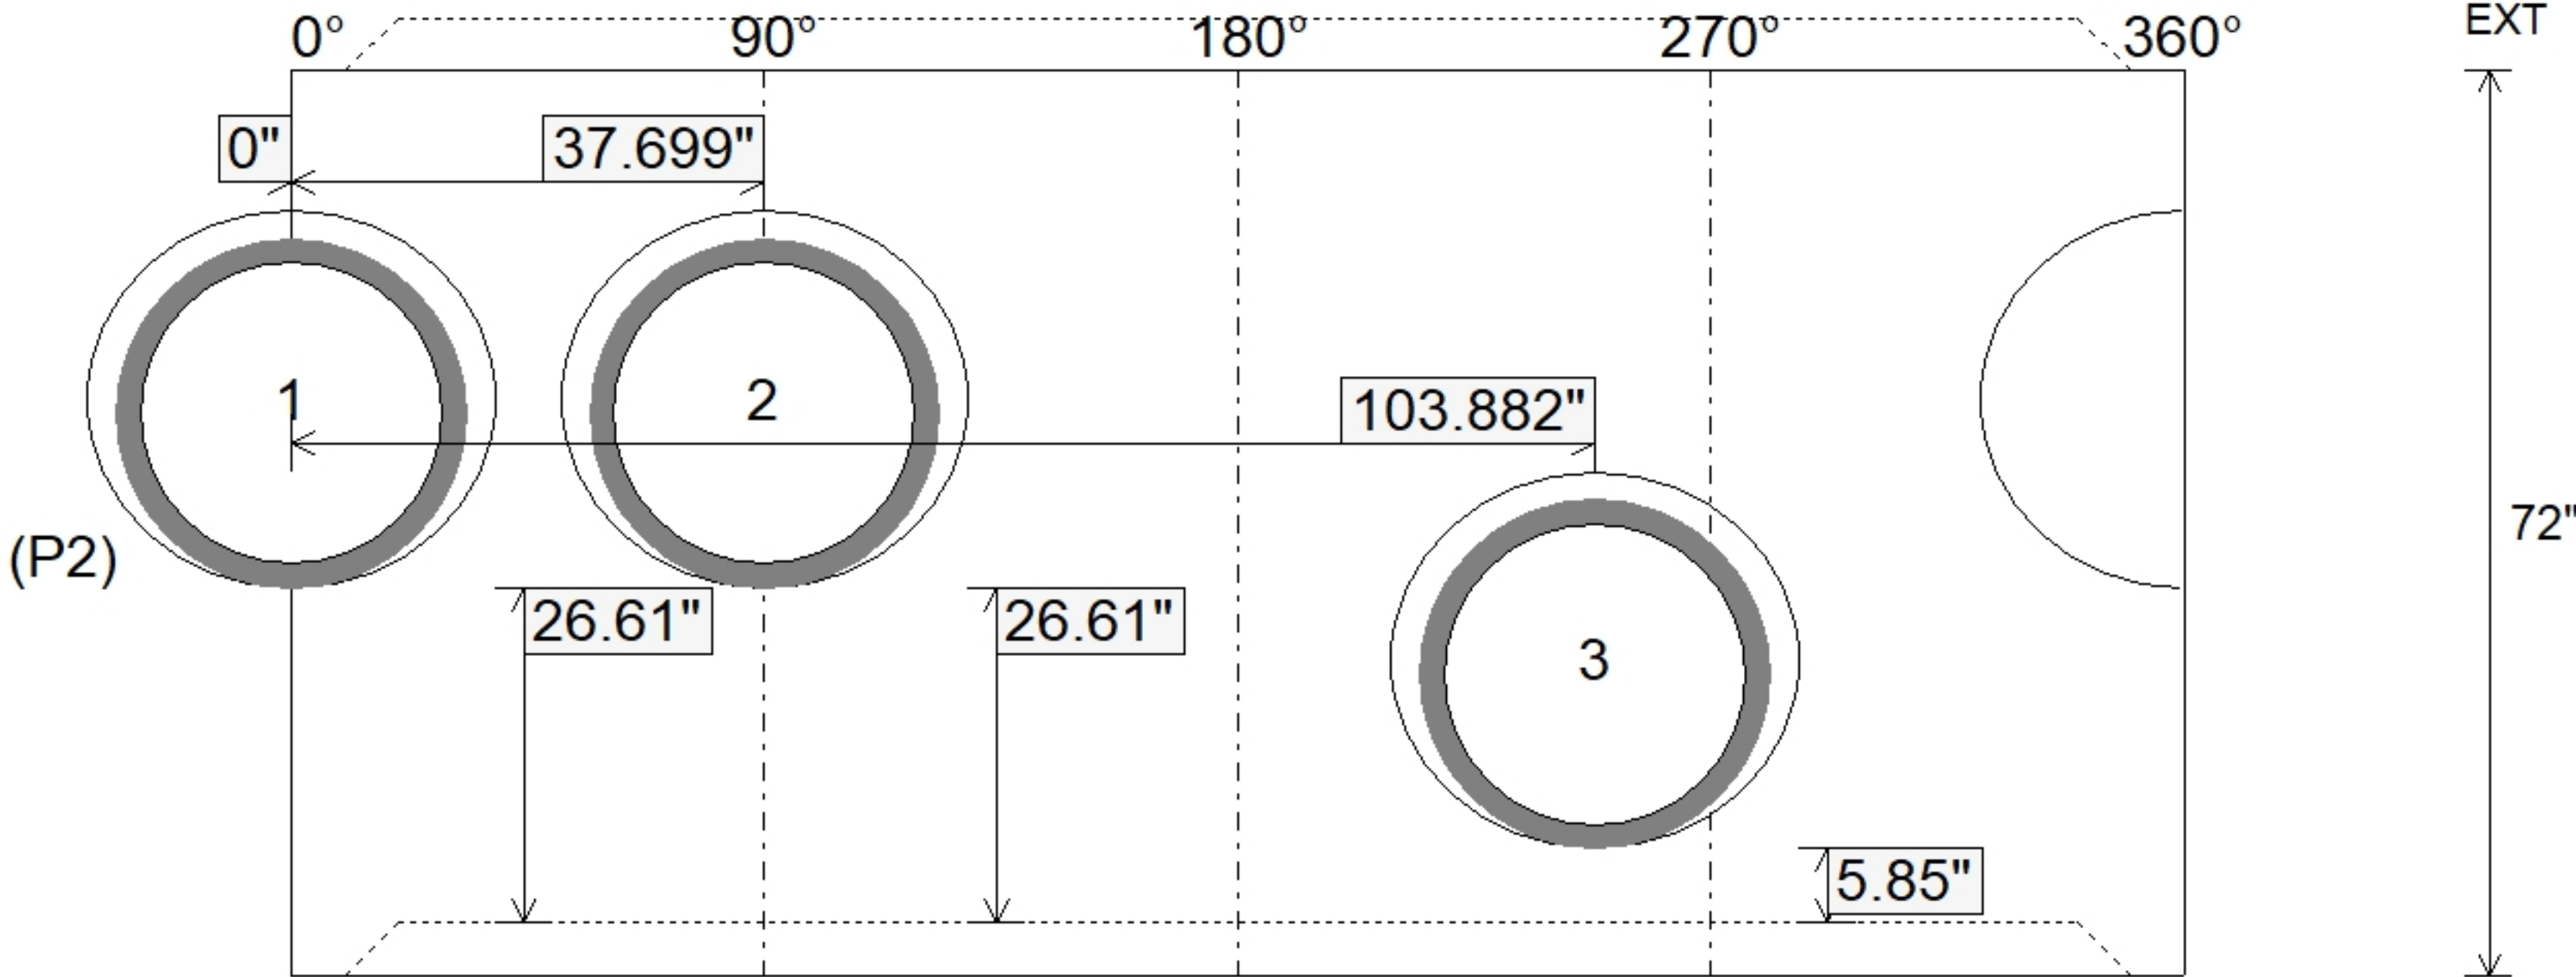

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 72" Height (Ext): 72"	Weight (Net): 4082 lb Volume (Net): 1.04cu.yd
----------------------------------	------------------------------------	--	--	--