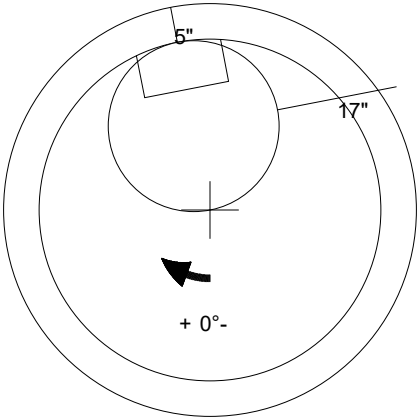



Job Name: 26-2484 Bass Pro Shops Outpost Paducah		Plant: Beaver Dam		Tech: S. Felletter		
Job Location: Paducah, KY		6/16/2026 8:03:41 AM		PC: A. Chambers		
Contractor: Central Paving Co. of Paducah, Inc.						
Structure ID: X1 ST-JB						
P3 MH048CN30		ECC CONE w/ 24" HOLE F/G				
P5) 24" - CASTING HEIGHT - 7" P4) 24" - GRADE RING F/F - 4" P3) 48" - ECC CONE w/ 24" HOLE F/G - 30" P2) 48" - MH RISER T/G - 72" P1) 48" - MH BASE T/h - 12" 1) CASTING - HOE MC-375 F/C Storm 2) 48" - Conseal CS-102 1.00" 2) 24" - Conseal CS-102 1.00" 3) Hole - 30 10) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 2050 lb 4082 lb 2169 lb 271 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 8841 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-375 F/C). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
						
						
48" - ECC CONE w/ 24" HOLE F/G - 30" - (P3)						
Coating (Int):		Seam Up: Flat		Wall Thickness: 5"		Height (Ext): 30"
Coating (Ext):		Seam Dn: Groove				
						Weight (Net): 2050 lb
						Volume (Net): 0.41cu.yd