

Job Name: 26-2484 Bass Pro Shops Outpost Paducah
Job Location: Paducah, KY
Contractor: Central Paving Co. of Paducah, Inc.

Plant: Beaver Dam

Tech: S. Felletter

6/16/2026 8:03:42 AM

PC: A. Chambers



Structure ID: X3 ST-CI

P3 GR24x24x8x3

GRADE RING F/F

P4) 24" x 24" - CASTING HEIGHT - 5"
P3) 24" x 24" - GRADE RING F/F - 3"
P2) 60" - MH FLAT TOP w/24"x24" Hole F/G - 13"
P1) 60" - MH BASE T/n - 60"
1) CASTING - HOE KY-465 SET (CBI TY F)
1) 60" - Conseal CS-102 1.00"
2) 24" x 24" - Conseal CS-102 1.00"
3) Hole - 30

0 lb
258 lb
2619 lb
7887 lb
465 lb
0 lb
0 lb
0 lb

Structure Total: 11229 lb

Structure Notes:


1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE 465 F/G/H).

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE = 4,000 PSI @ 28 DAYS.
3. REINFORCING: #4 BAR AS SHOWN (GRADE 60 KSI).
4. LIFTS: 2 EA. CONAC .8 TON WIRE ROPE ANCHORS REQUIRED.

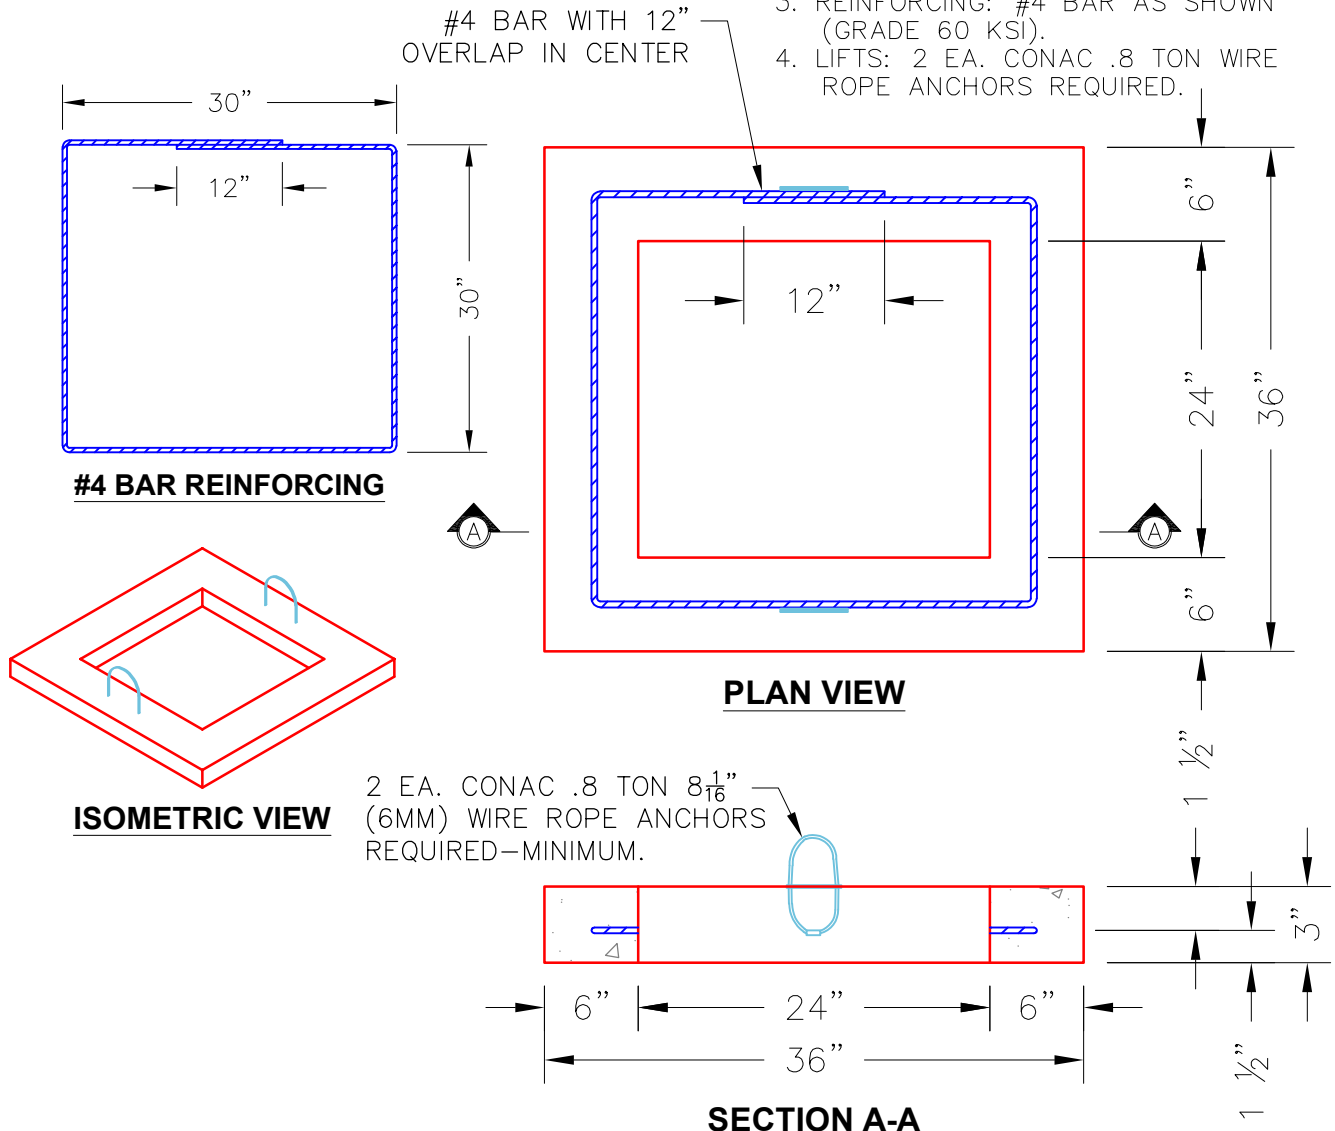

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 3"

Weight (Net): 258 lb
Volume (Net): 0.07cu.yd