

Job Name: 26-2484 Bass Pro Shops Outpost Paducah	Plant: Beaver Dam	Tech: S. Felletter	
Job Location: Paducah, KY	6/16/2026 8:03:45 AM	PC: A. Chambers	
Contractor: Central Paving Co. of Paducah, Inc.			
Structure ID: Y2 ST-JB			
P2 MH048CN30		ECC CONE w/ 24" HOLE F/G	

- P4) 24" - CASTING HEIGHT - 7"
- P3) 24" - GRADE RING F/F - 4"
- P2) 48" - ECC CONE w/ 24" HOLE F/G - 30"
- P1) 48" - MH BASE T/n - 60"
- 1) CASTING - HOE MC-375 F/C Storm
- 1) 48" - Conseal CS-102 1.00"
- 2) 24" - Conseal CS-102 1.00"
- 2) Hole - 30
- 8) MH Step ML-10-TDS-NCR - 10"



	0 lb
	270 lb
	2050 lb
	4890 lb
	271 lb
	0 lb
	0 lb
	0 lb
	0 lb
Structure Total:	7481 lb

Structure Notes: .

- 1. PER ASTM C478 SPECIFICATIONS.
- 2. CONCRETE = 4,000 PSI AT 28 DAYS.
- 3. CASTING BY ICAST (HOE MC-375 F/C).

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

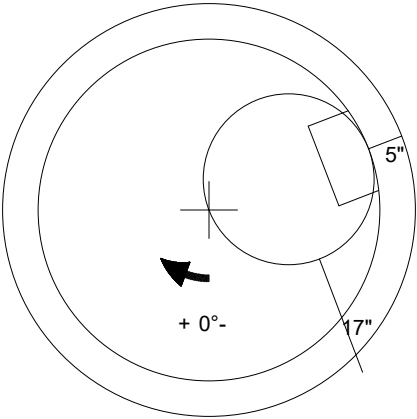

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 2050 lb Volume (Net): 0.41cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--