



Job Name: 26-2484 Bass Pro Shops Outpost Paducah Job Location: Paducah, KY Contractor: Central Paving Co. of Paducah, Inc.					Plant: Beaver Dam 6/16/2026 8:02:35 AM		Tech: S. Felletter PC: A. Chambers				
Structure ID: Y4 ST-MH											
P1 MH048BA48		MH BASE T/n									
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 4" P2) 48" - ECC CONE w/ 24" HOLE F/G - 30" P1) 48" - MH BASE T/n - 48" 1) CASTING - HOE MC-375 F/C Storm 1) 48" - Conseal CS-102 1.00" 2) 24" - Conseal CS-102 1.00" 2) Hole - 30 7) MH Step ML-10-TDS-NCR - 10"						0 lb 270 lb 2050 lb 4051 lb 271 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 6642 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-375 F/C). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 369.96' Rim to Invert: 7.4' Slack: 1.7' Sump: 1.9' Step Position: 270											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	362.56'	0°	0"	24" HDPE	27.8"	Hole 30	30"	32.406"	0"	0"	
Invert 2	362.56'	150°	75.922"	24" HDPE	27.8"	Hole 30	30"	32.406"	0"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

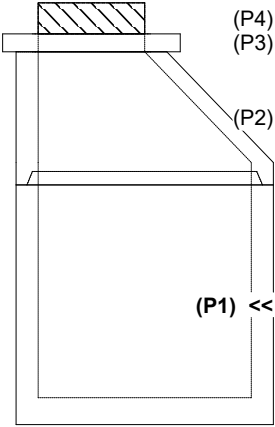

(P4)
(P3)
(P2)
(P1) <<

RIGHT-SIDE UP VIEW (int. dimensions)

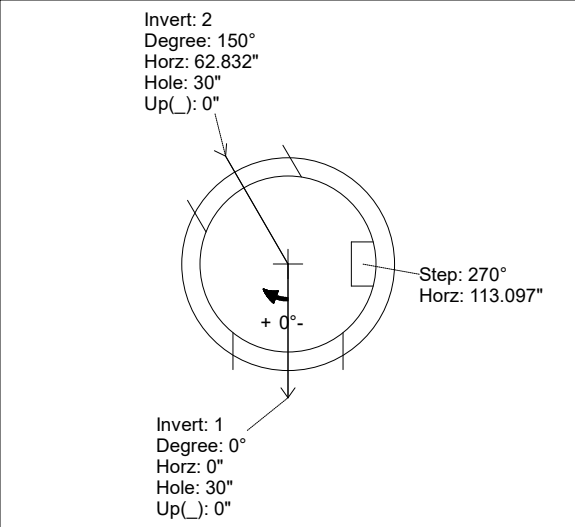


Invert: 2
Degree: 150°
Horz: 62.832"
Hole: 30"
Up(): 0"

Step: 270°
Horz: 113.097"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 30"
Up(): 0"

UPSIDE-DOWN VIEW (int. dimensions)

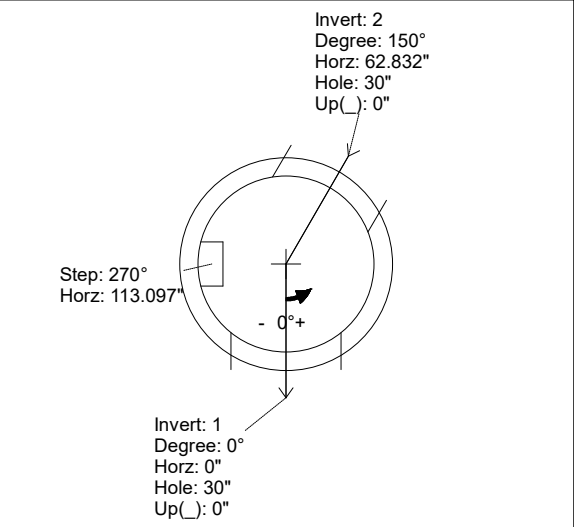


Invert: 2
Degree: 150°
Horz: 62.832"
Hole: 30"
Up(): 0"

Step: 270°
Horz: 113.097"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 30"
Up(): 0"

INSIDE WALL DIMENSIONS

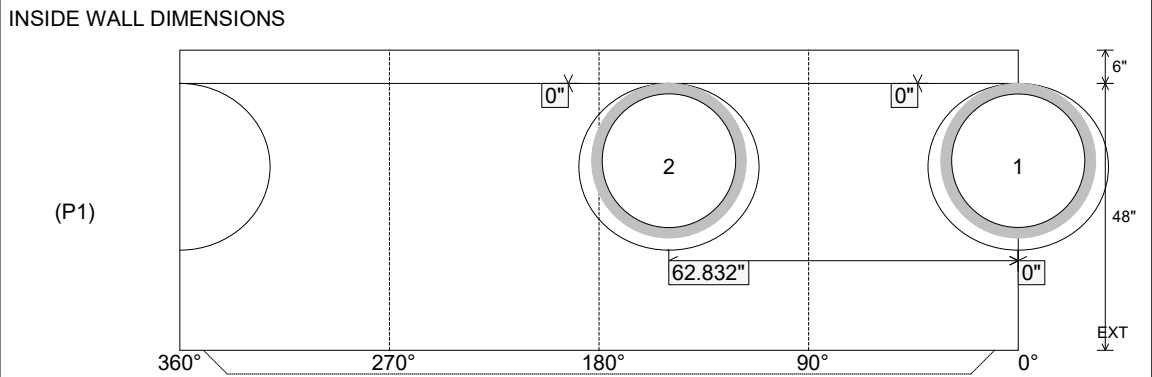

(P1)

360° 270° 180° 90° 0°

62.832"

48"

6"

EXT

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 48" Height (Ext): 54"	Weight (Net): 4051 lb Volume (Net): 1.03cu.yd
----------------------------------	---------------------------------	--	--	--