



Job Name: 26-2484 Bass Pro Shops Outpost Paducah Job Location: Paducah, KY Contractor: Central Paving Co. of Paducah, Inc.					Plant: Beaver Dam 6/16/2026 8:02:38 AM		Tech: S. Felletter PC: A. Chambers				
Structure ID: Y8 ST-IN											
P1 MH048BA48			MH BASE T/n								
P3) 34" x 34" - CASTING HEIGHT - 3" P2) 48" - MH FLAT TOP w/34"x34" Hole F/G - 12" P1) 48" - MH BASE T/n - 48" 1) CASTING - HOE 595 F/G 1) 48" - Conseal CS-102 1.00" 2) Hole - 24						0 lb 1194 lb 4289 lb 376 lb 0 lb 0 lb ----- Structure Total: 5859 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE 595 F/G). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 371.26' Rim to Invert: 5.26' Slack: 1.72' Sump: 1.6' Step Position: 0°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (↓)	Offset	
Invert 1	366'	0°	0"	18" HDPE	21.2"	Hole 24	24"	25.133"	0"	0"	
Invert 2	366'	180°	91.106"	18" HDPE	21.2"	Hole 24	24"	25.133"	0"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											




(P1) <<


RIGHT-SIDE UP VIEW (int. dimensions)

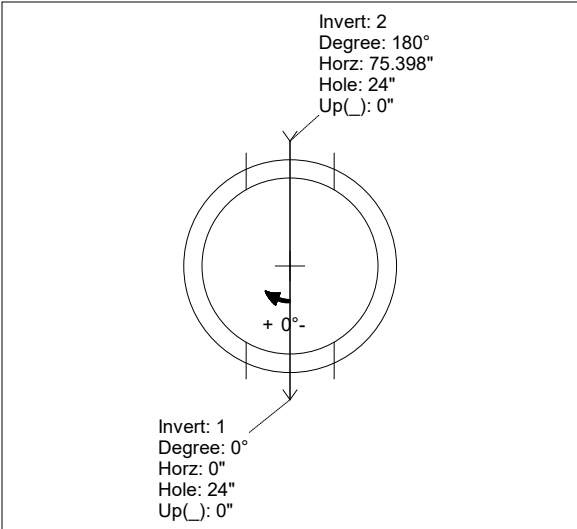

UPSIDE-DOWN VIEW (int. dimensions)

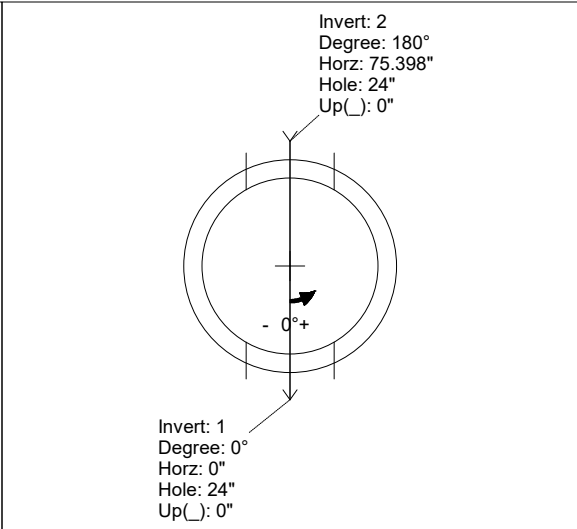

INSIDE WALL DIMENSIONS

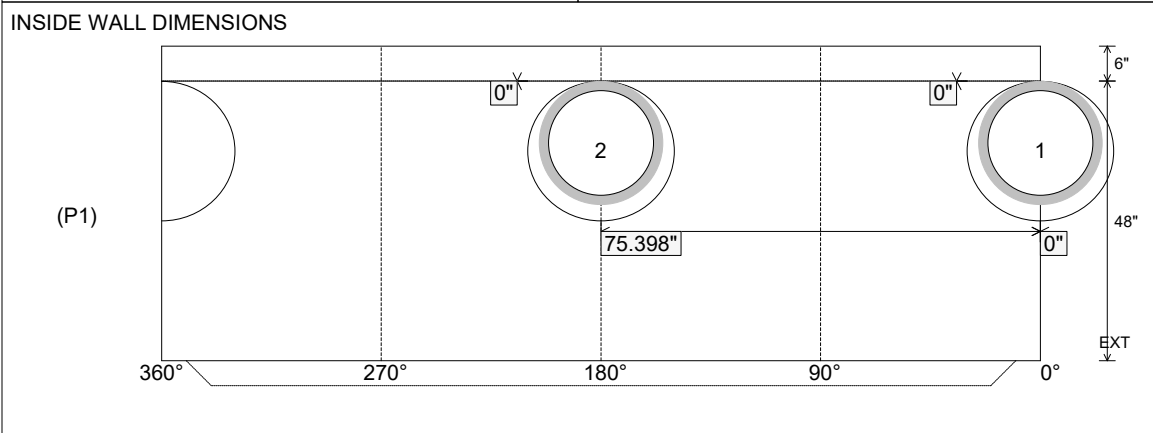

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 48" Height (Ext): 54"	Weight (Net): 4289 lb Volume (Net): 1.1cu.yd
----------------------------------	---------------------------------	--	--	---