

Job Name: 26-2484 Bass Pro Shops Outpost Paducah  
 Job Location: Paducah, KY  
 Contractor: Central Paving Co. of Paducah, Inc.

Plant: Beaver Dam  
 6/16/2026 8:01:24 AM

Tech: S. Felletter  
 PC: A. Chambers



## Structure ID: Z2 ST-MH

**P3 GR3**

**GRADE RING F/F**


- P4) 24" - CASTING HEIGHT - 7"  
 P3) 24" - GRADE RING F/F - 3"  
 P2) 48" - ECC CONE w/ 24" HOLE F/G - 36"  
 P1) 48" - MH BASE T/n - 72"  
 1) CASTING - HOE MC-375 F/C Storm  
 1) 48" - Conseal CS-102 1.00"  
 2) 24" - Conseal CS-102 1.00"  
 3) Hole - 24  
 7) MH Step ML-10-TDS-NCR - 10"

- 0 lb  
 202 lb  
 3000 lb  
 5768 lb  
 271 lb  
 0 lb  
 0 lb  
 0 lb  
 0 lb  
 0 lb  
 9242 lb
- Structure Notes:**  
 1. PER ASTM C478 SPECIFICATIONS.  
 2. CONCRETE = 4,000 PSI AT 28 DAYS.  
 3. CASTING BY ICAST (HOE MC-375 F/C).  
 REINFORCING PER ASTM A615 (GRADE 60).  
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.  
 - RISER/WALLS (As .12)  
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total:


### NOTES:

- GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:  
 -CONCRETE: 4,000 PSI @ 28 DAYS.  
 -REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
- WEIGHT: 3" 202 LBS.

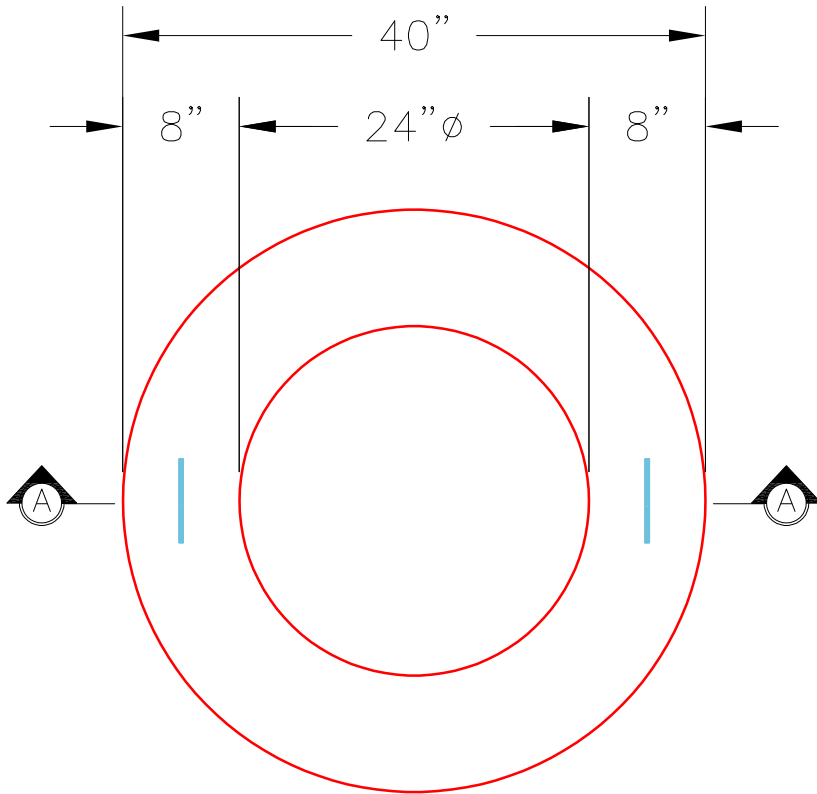


**PLAN VIEW**

2x CONAC WRA016 WIRE ROPE LIFTING ANCHORS

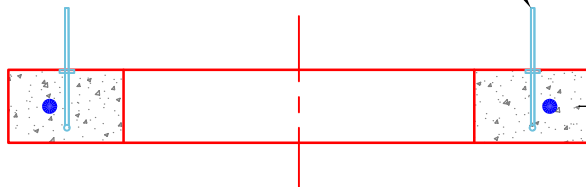

**SECTION A-A**

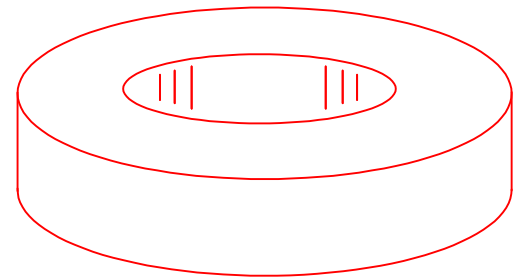

**ISOMETRIC VIEW**

Coating (Int):  
 Coating (Ext):

Seam Up: Flat  
 Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 3"

Weight (Net): 202 lb  
 Volume (Net): 0.05cu.yd