

Contractor: Koberstein Contracting, Inc.

TECH: Jared - F

Plant: 100



Size: 24"

Rim to Invert: 0'

Floor Height: 0"

Slack: 6"


Structure Notes: 1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. ADMIXTURE = CONBLOCK CDA RED.
4. CASTING SUPPLIED BY ICAST (HOE MC-315 F/C SANITARY).
REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

STRUCTURE SUMMARY:

P1) 24" - SLOPED & FLARED HEADWALL - 24"


5467 lb

Structure Total: 5467 lb

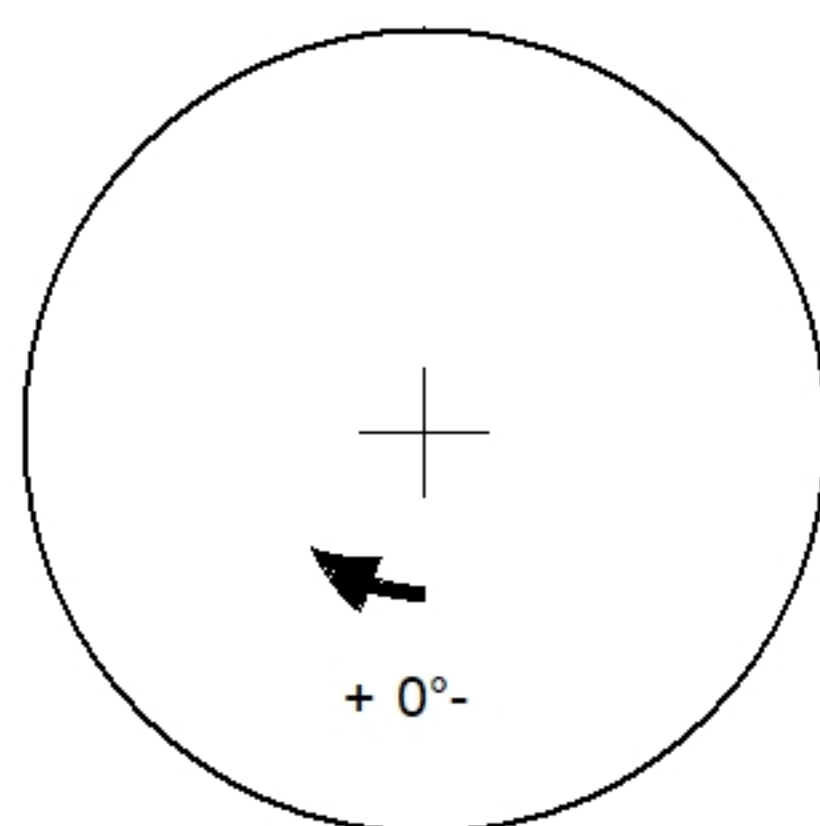

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	2.5'							
Reducer								
Invert 1								
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

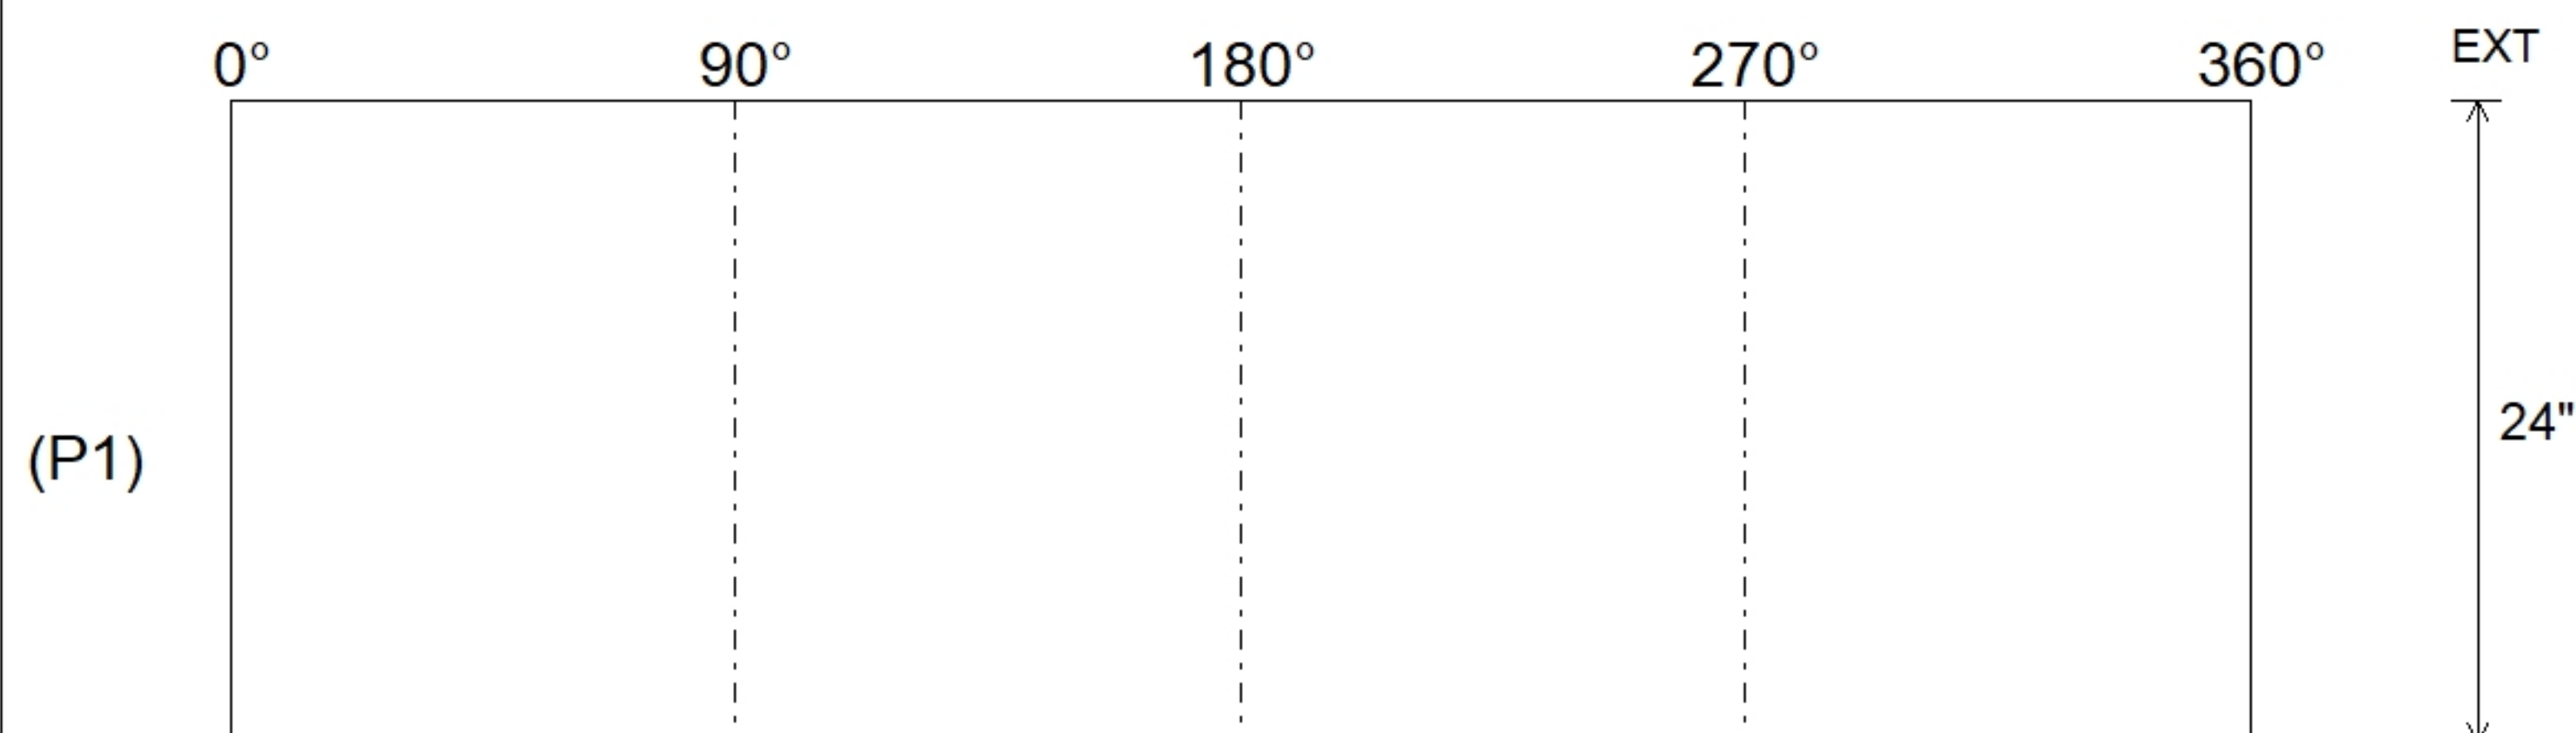

24" - SLOPED & FLARED HEADWALL - 24" - (P1)

Submittal Drawing
7/22/2026 9:08:39 AM

SUBMITTAL
APPROVED BY: