



Job Name: 26-2513- Stagner Farms Subdivision Sec. 2 Job Location: Bowling Green, KY Contractor: R.A. Alexander & Sons, Inc.					Plant: 100 9/22/2026 8:17:21 AM		Tech: Jared - A PC: Trevor Lewis			
Structure ID: A7 ST-JB										
P1 MH048BA60			MH BASE							
P5) 24" - CASTING HEIGHT - 7" P4) 24" - GRADE RING - 4" P3) 48" - MH FLAT TOP w/ 24" ECC Hole - 12" P2) 48" - MH RISER - 60" P1) 48" - MH BASE - 60" 1) CASTING - HOE MC-375 F/C Storm 2) 48" - Conseal CS-102 1.00" 2) 24" - Conseal CS-102 1.00" 2) Hole - 28					0 lb 270 lb 1561 lb 4192 lb 4976 lb 271 lb 0 lb 0 lb 0 lb Structure Total: 11270 lb		Structure Notes: 1. HOE MC-375 F/C STORM PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 562.23' Rim to Invert: 11.97' Slack: 1.14" Sump: 0.5" Step Position: 225°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	550.26'	0°	0"	24" CMP	25"	Hole 28	28"	29.896"	0"	0"
Invert 2	550.26'	90°	45.553"	24" CMP	25"	Hole 28	28"	29.896"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

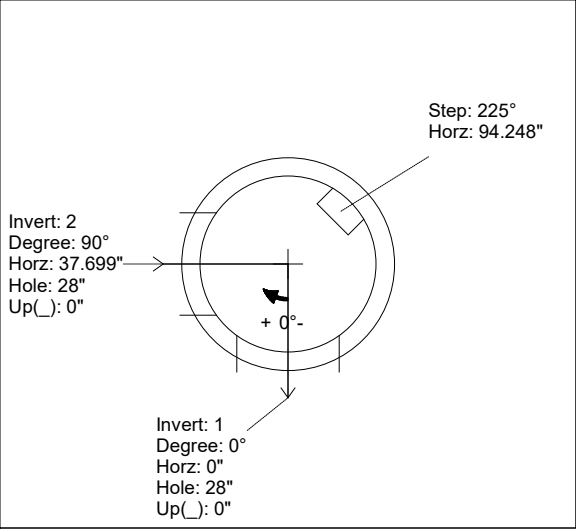

UPSIDE-DOWN VIEW (int. dimensions)

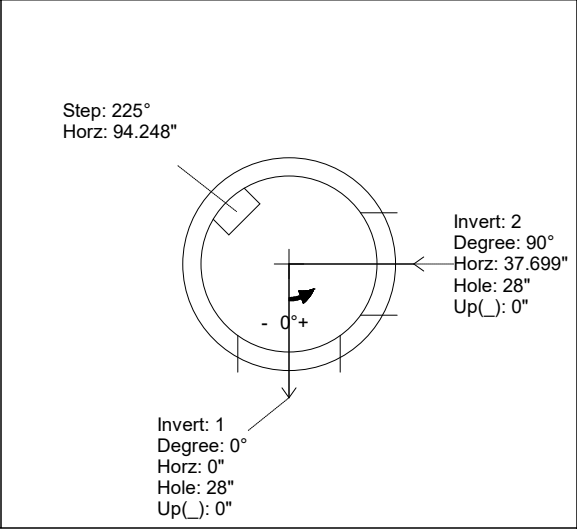

INSIDE WALL DIMENSIONS

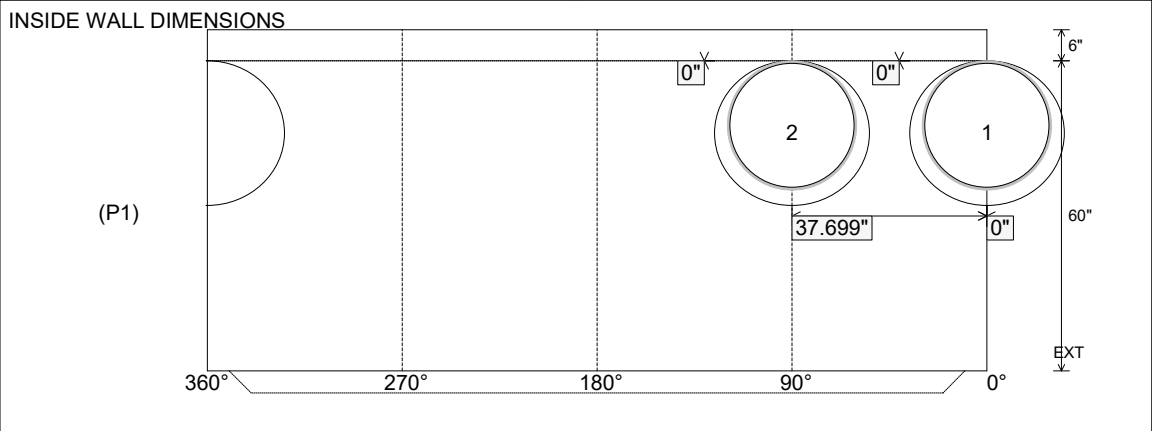

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 60" Height (Ext): 66"	Weight (Net): 4976 lb Volume (Net): 1.27cu.yd
----------------------------------	---------------------------------	--	--	--