



Job Name: 26-2560 Ashtree Subdivision Unit 3 Ph. 1 Job Location: Nicholasville, KY Contractor: The Allen Company, Inc.					Plant: Beaver Dam 8/24/2026 8:08:05 AM		Tech: J. ROSS PC: E. BRADLEY				
Structure ID: AA3 LEXA											
P1 BX3636-08BA42 BOX BASE 8inW, 8inF											
P4) 36" x 120" - CB INLET LEX A 10' TOP SAG - 12" P3) 36" x 120" - CB INLET LEX A 10' BOTTOM SAG - 18" P2) 36" x 36" - BOX RISER 8inW - 42" P1) 36" x 36" - BOX BASE 8inW, 8inF - 42" 1) CASTING - HOE KY-206 F/C (KY CBI A) 2) 36" x 36" - SGL 1"x14.5' Butyl 2) Hole - 22 2) Hole - 6 11) MH Step ML-10-TDS-NCR - 10"						2700 lb 3650 lb 4669 lb 6522 lb 206 lb 0 lb 0 lb 0 lb 0 lb 0 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. REINFORCING PER ASTM A615 (GRADE 60). - TOP PHASE TOP - #5 BARS AT 6" C.C.E.W. - TOP PHASE BTM - #5 BARS AT 12" C.C.E.W. - TOP SLAB - #5 BARS AT 12" C.C.E.W.. - RISER/WALLS - #5 BARS AT 12" C.C.E.W. - FLOOR - #5 BARS AT 12" C.C.E.W. 4. HOE KY-206 F/C CASTING PROVIDED BY ICAST			
Rim: 955.36' Rim to Invert: 9.99' Slack: 5.88" Sump: 0" Step Position: 90°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (↓)	Offset	
Invert 1	945.37'	90°	26"	15" RCP B WALL	19.5"	Hole 22	22"	22"	-3.5"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

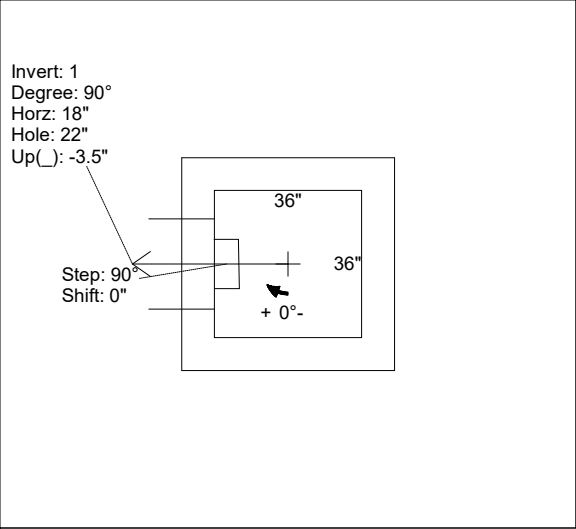

UPSIDE-DOWN VIEW (int. dimensions)

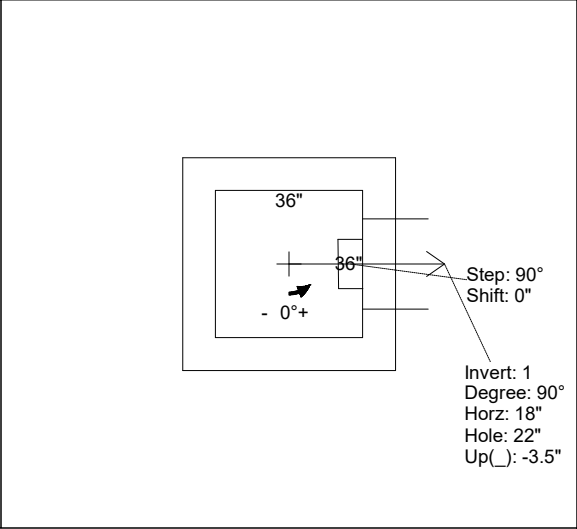

INSIDE WALL DIMENSIONS

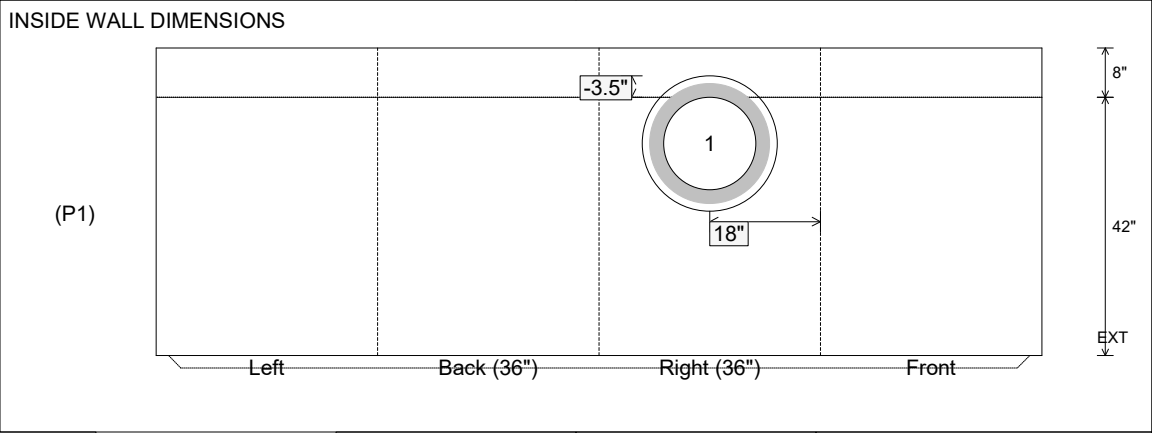

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 42" Height (Ext): 50"	Weight (Net): 6522 lb Volume (Net): 1.67cu.yd
----------------------------------	---------------------------------	--	--	--