


Job Name: 26-2560 Ashtree Subdivision Unit 3 Ph. 1 Job Location: Nicholasville, KY Contractor: The Allen Company, Inc.					Plant: Beaver Dam 8/24/2026 8:16:55 AM		Tech: J. ROSS PC: E. BRADLEY				
Structure ID: B2 SS-MHD											
P2 MH048RS60SCDARED			MH RISER w/DROP/ConBlock-CDA Red								
P5) 24" - CASTING HEIGHT - 7" P4) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red - 36" P3) 48" - MH RISER w/DROP/ConBlock-CDA Red - 60" P2) 48" - MH RISER w/DROP/ConBlock-CDA Red - 60" P1) 48" - MH BASE w/DROP/ConBlock-CDA Red - 24" 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) CASTING - HOE MC-315 F/C Sanitary 3) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 1) PSX - 12M NYLO 1) Drop Tee - 8" PVC 1) Drop Elbow - 8" PVC 15) MH Step ML-10-TDS-NCR - 10"					0 lb 2251 lb 4168 lb 4192 lb 2935 lb 1440 lb 0 lb 0 lb 258 lb 0 lb 0 lb 8 lb 0 lb 0 lb 0 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. 4. CASTING BY OTHERS 5. ADMIXTURE = CONBLOCK-CDA RED				
Rim: 933.98' Rim to Invert: 15.61' Slack: 2.32" Sump: 2'					Structure Total: 15251 lb Step Position: 0						
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

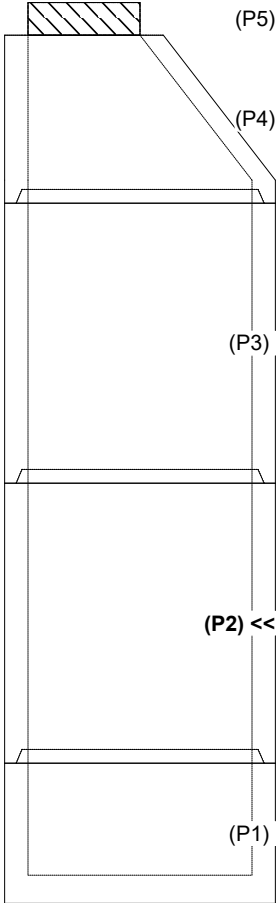

(P5)


(P4)

(P3)

(P2) <<

(P1)


RIGHT-SIDE UP VIEW (int. dimensions)

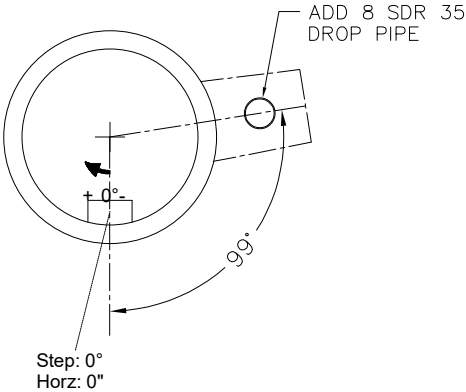

ADD 8 SDR 35 DROP PIPE

Step: 0°
Horz: 0"

INSIDE WALL DIMENSIONS

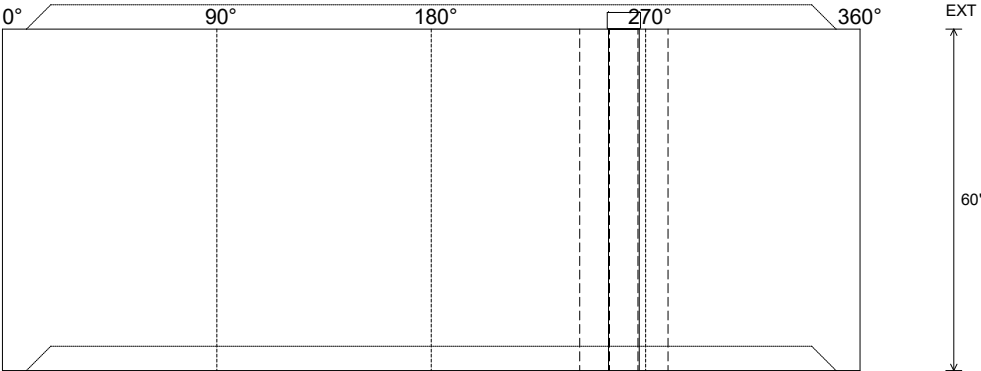

(P2)

EXT 60"

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"	Weight (Net): 4192 lb Volume (Net): 1.07cu.yd
----------------------------------	------------------------------------	--	--	--