

Contractor: The Allen Company, Inc.

Plant: Beaver Dam




Slack: 2.48"

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
4. CASTING BY OTHERS


4) MH Step ML-10-TDS-NCR - 10"

0 lb


Structure Total: 5754 lb

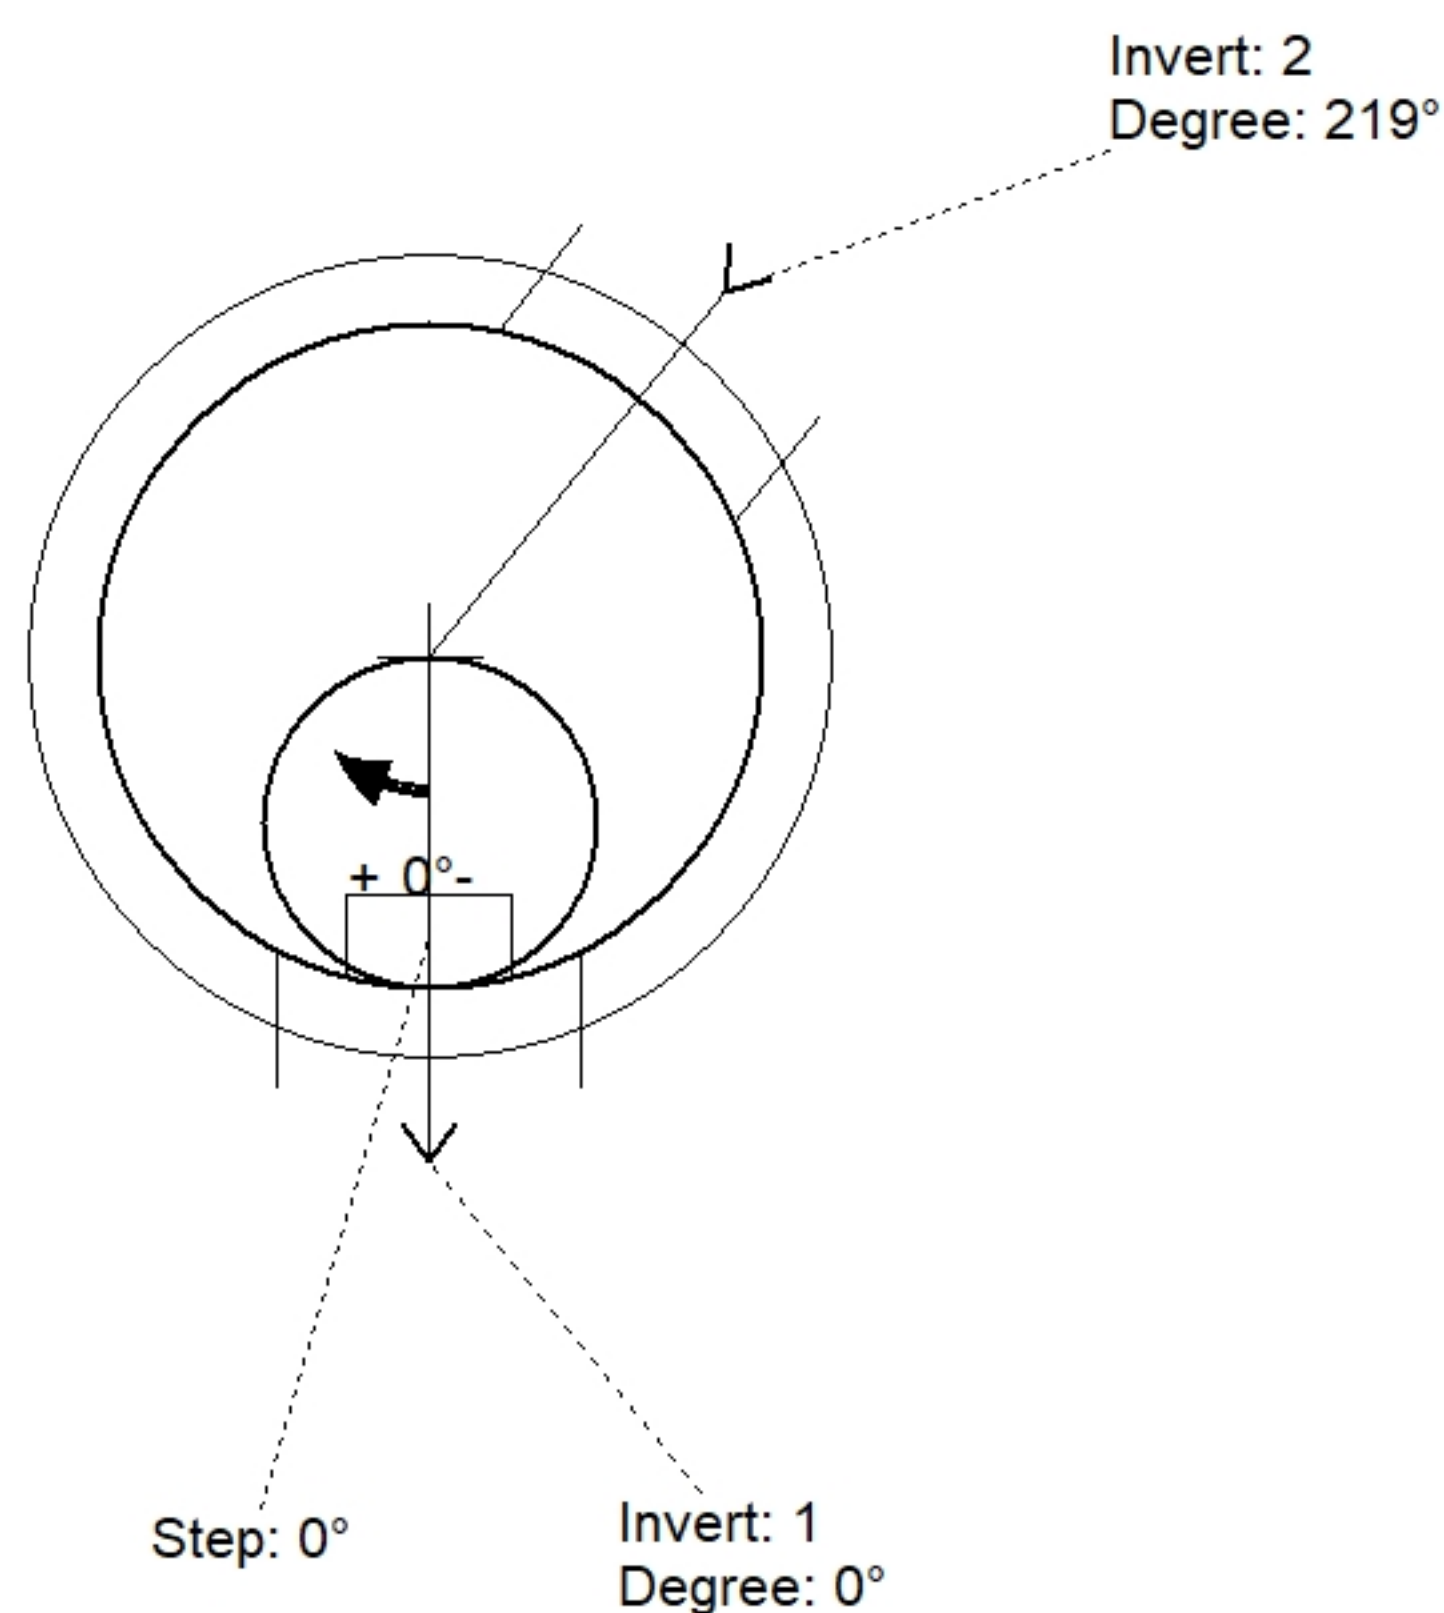

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	940.36'							
Reducer								
Invert 1	935.07'	0°	15" RCP B WALL	19.5"	22"	Hole 22	-3.5"	P1
Invert 2	935.17'	219°	15" RCP B WALL	19.5"	22"	Hole 22	-2.3"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

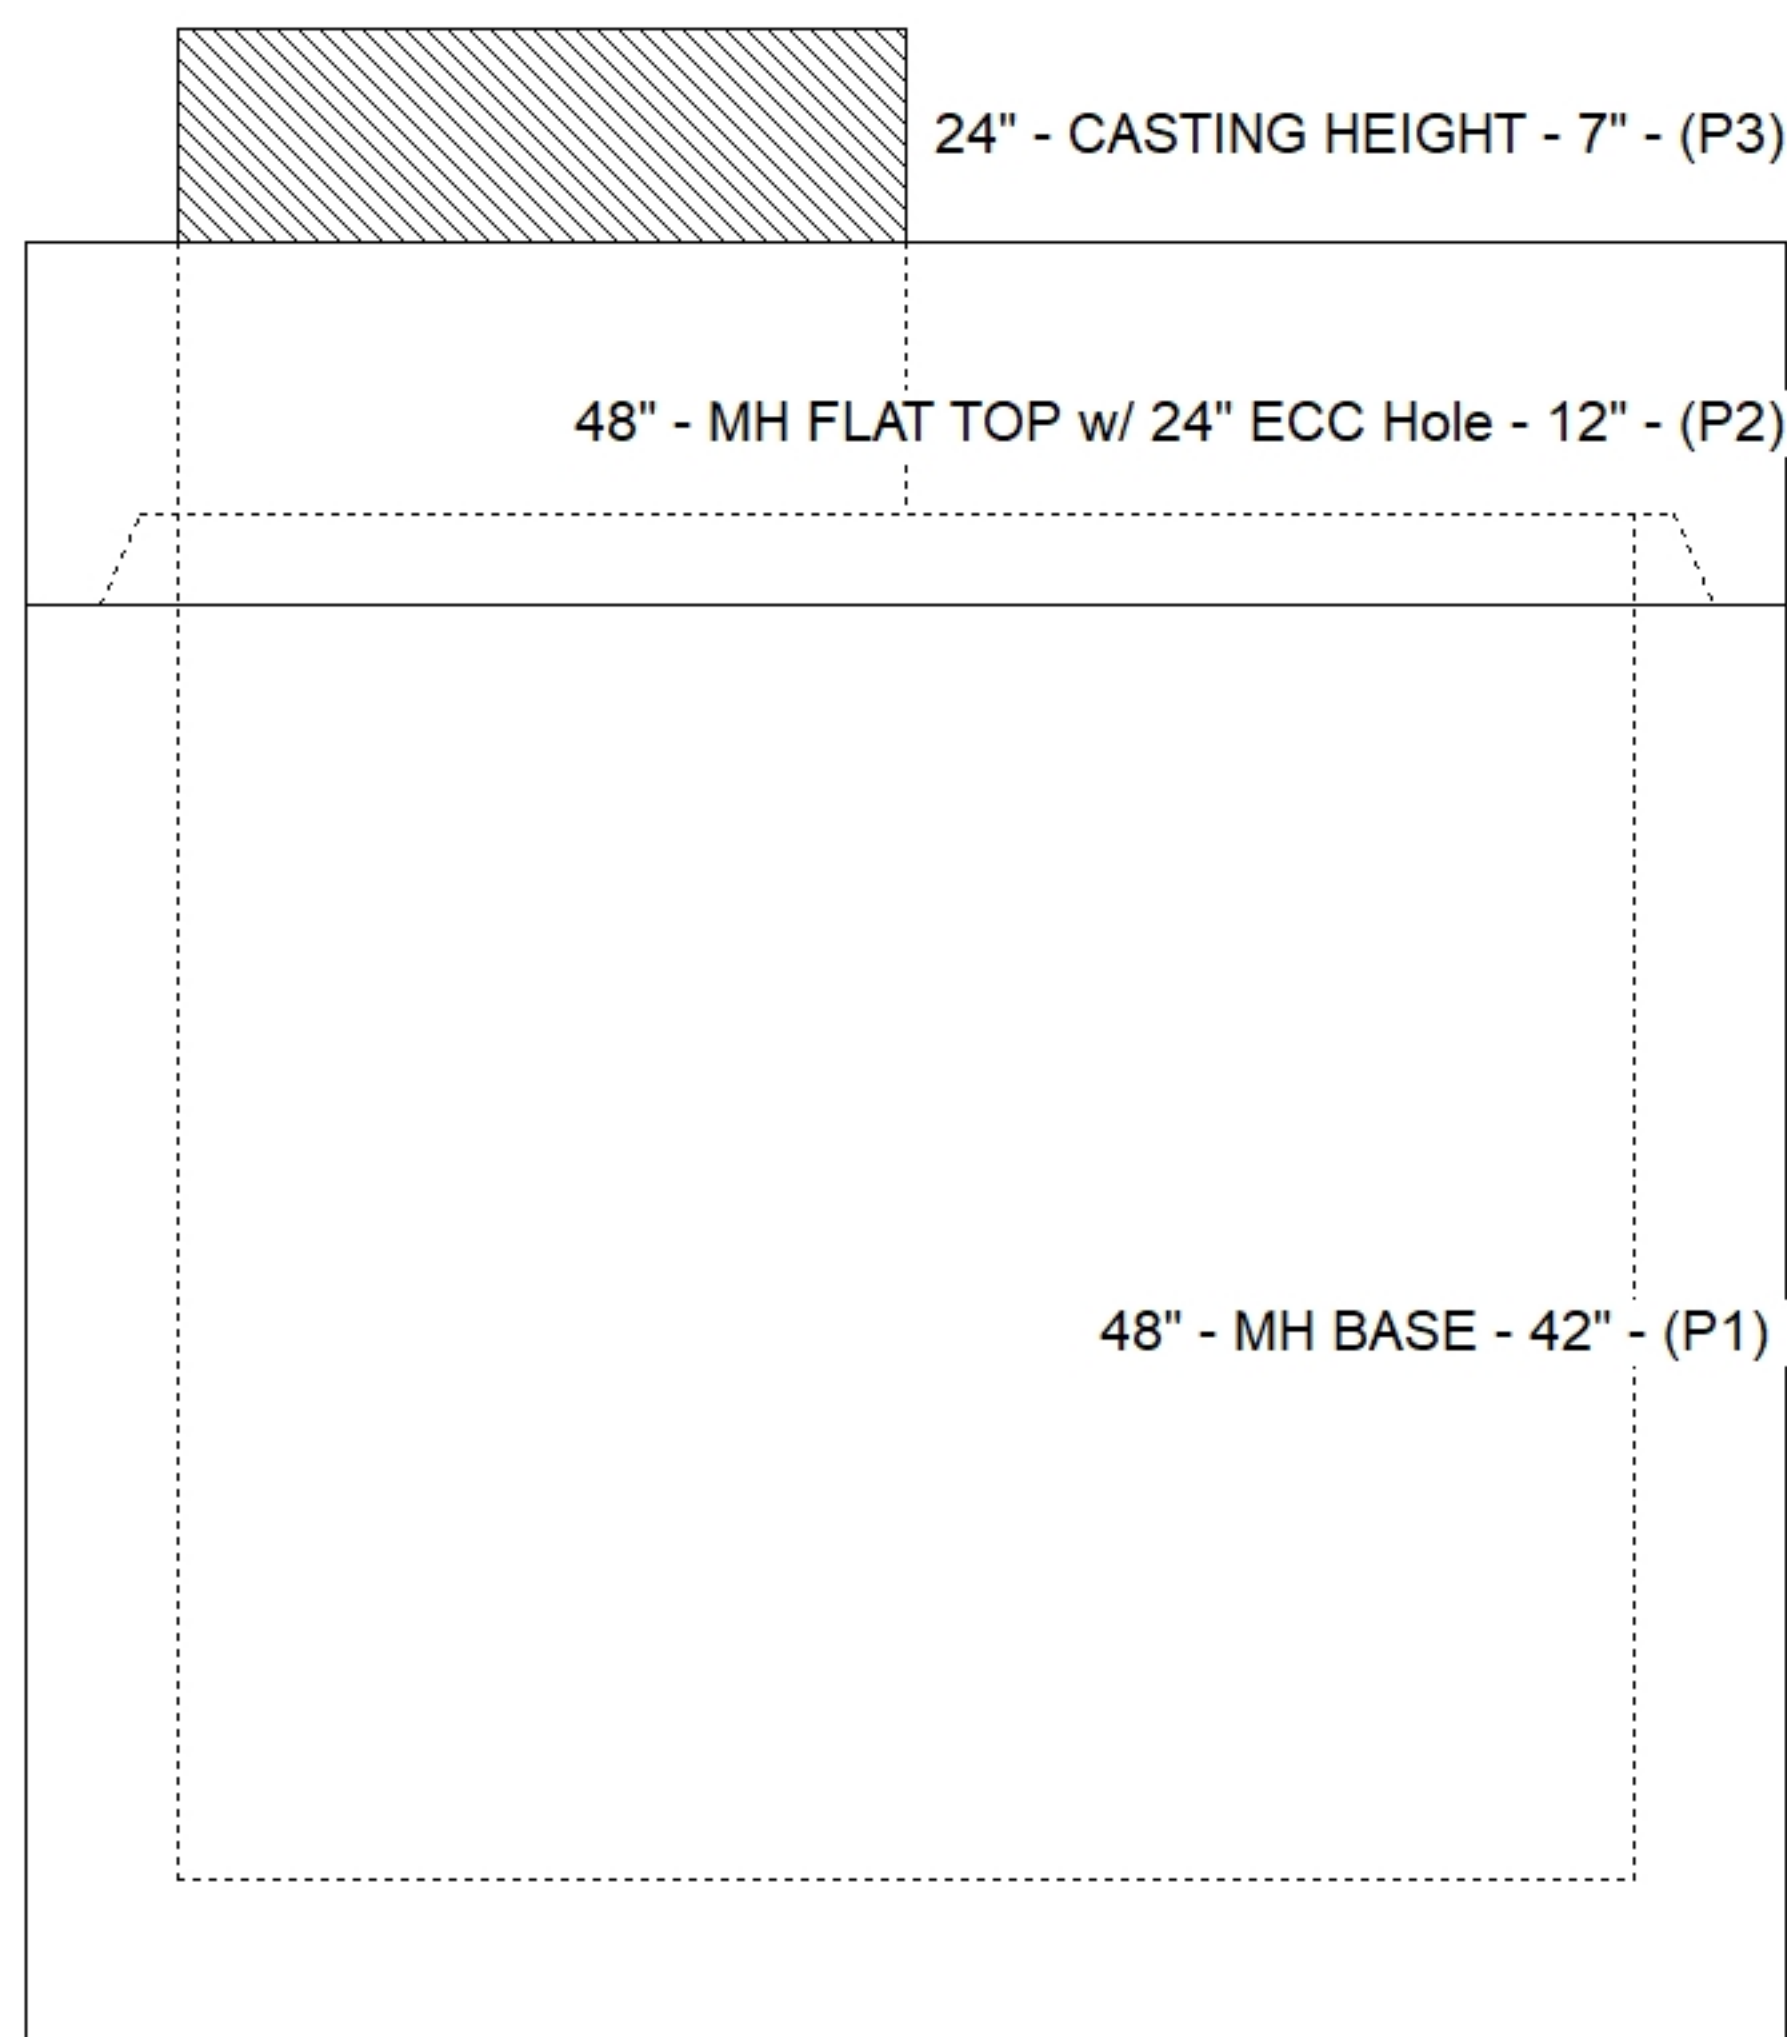

Default - Interior Dimensions

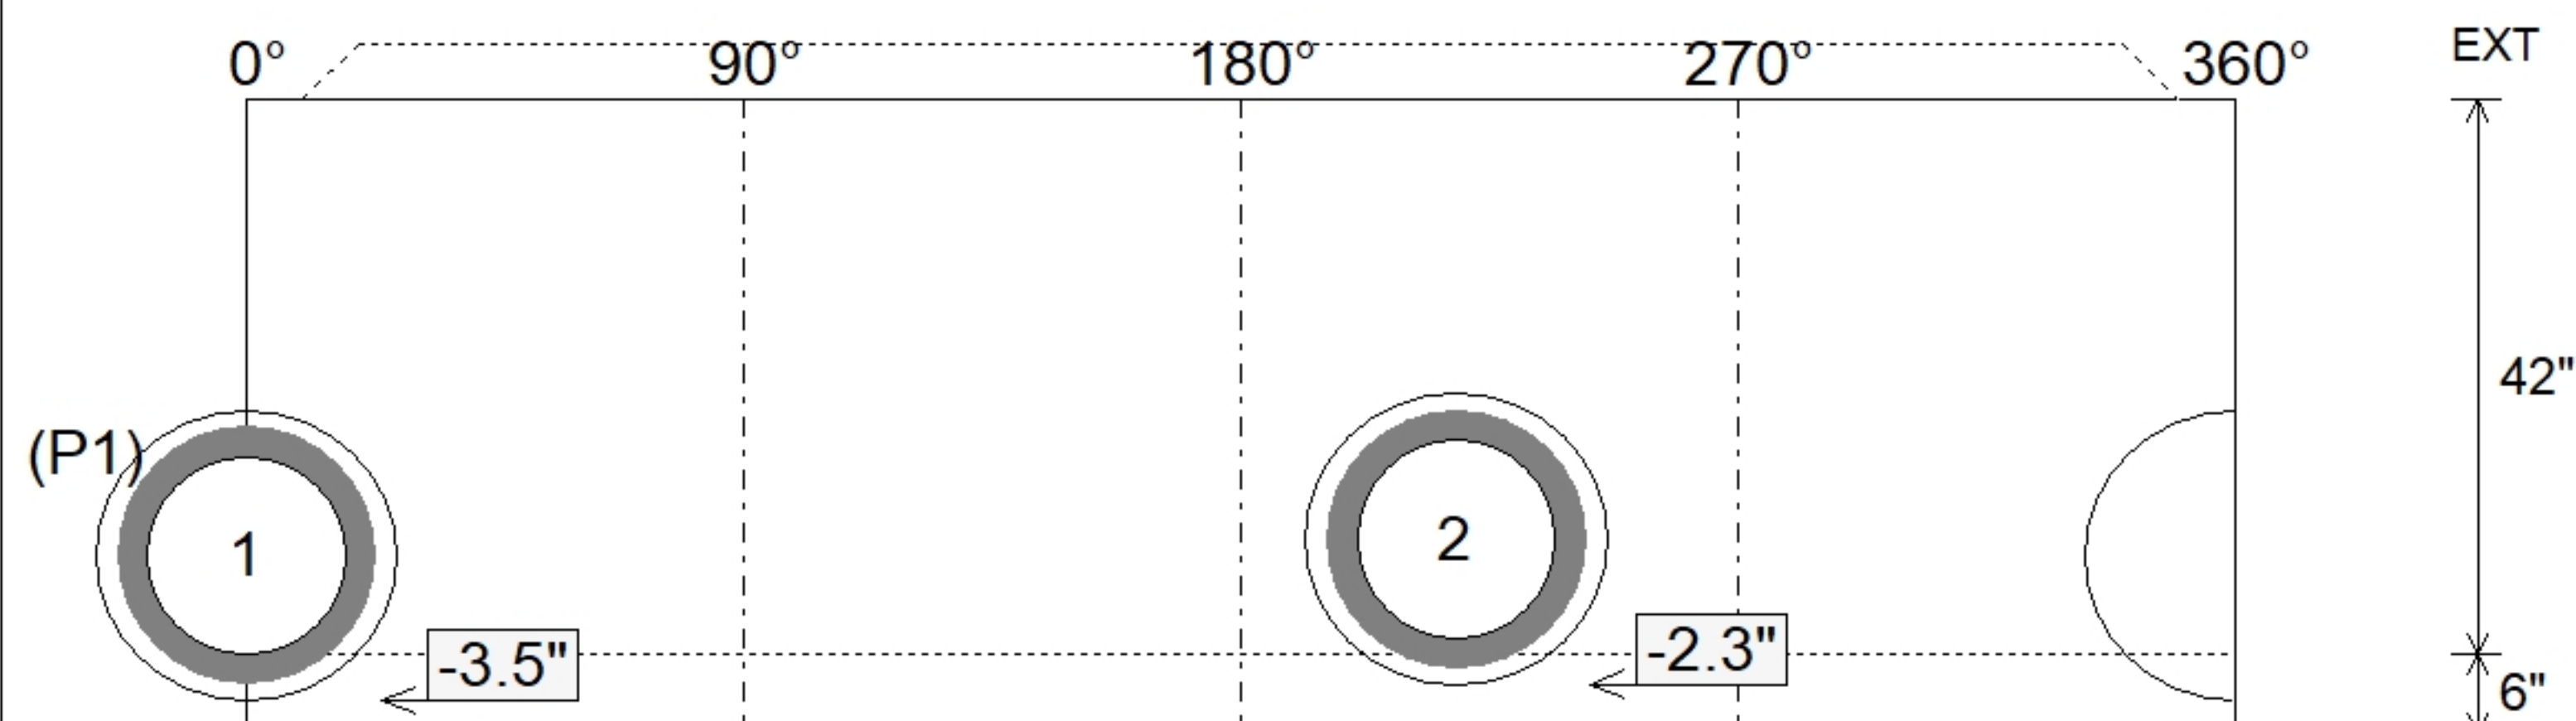

SUBMITTAL
APPROVED BY: