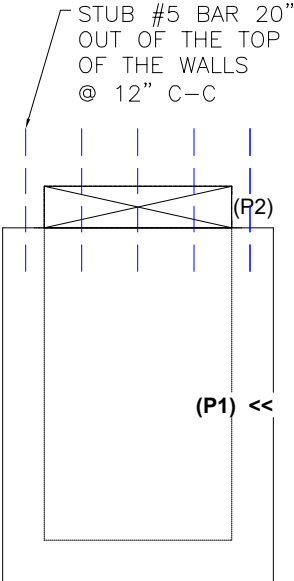
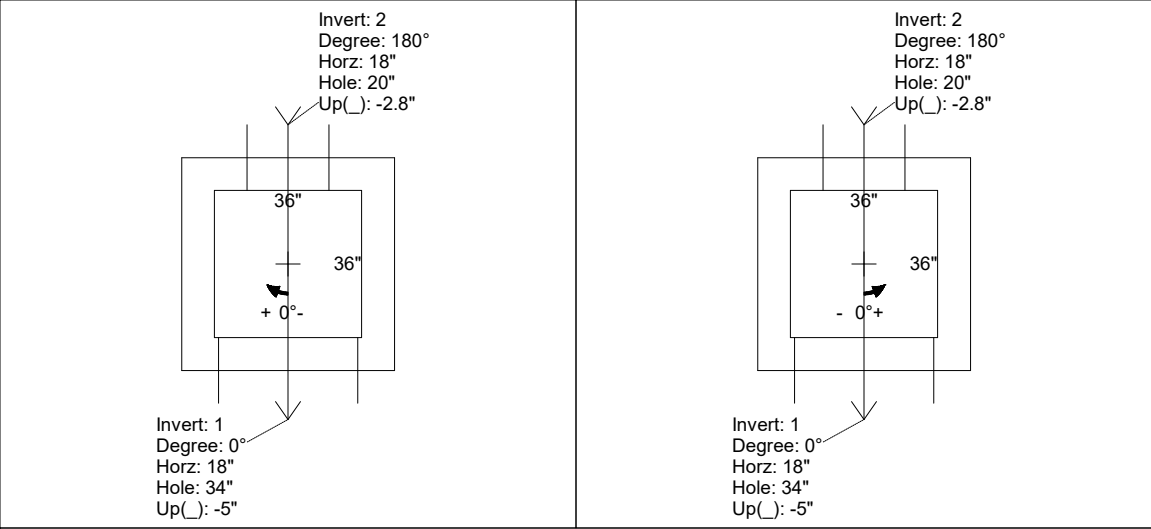
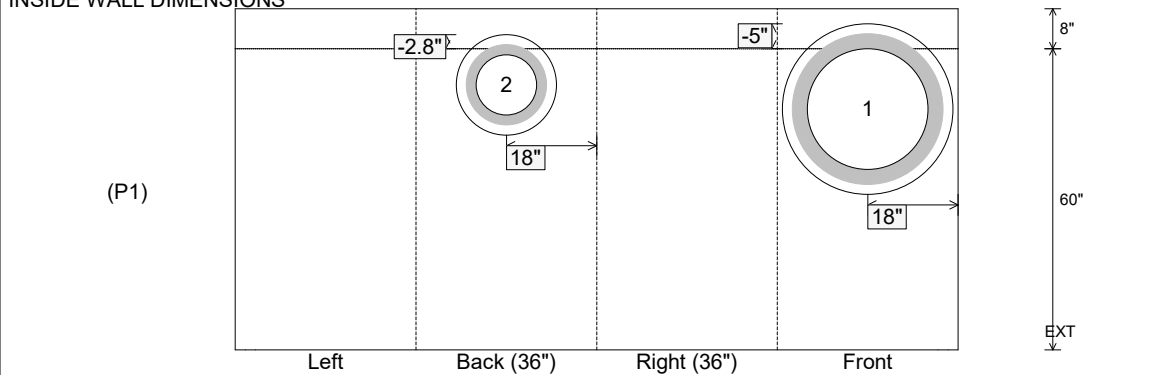


Job Name: 26-2560 Ashtree Subdivision Unit 3 Ph. 1 Job Location: Nicholasville, KY Contractor: The Allen Company, Inc.					Plant: Beaver Dam 8/24/2026 8:08:18 AM		Tech: J. ROSS PC: E. BRADLEY				
Structure ID: DD2 DBI3											
P1 BX3636-08BAVF BOX BASE 8inW, 8inF, Variable Ht											
P2) 36" x 36" - P.I.P. - BY OTHERS - 8" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 60" 1) CASTING - HOE KY-328 SET (DBI 3) 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 34 1) Hole - 20					0 lb 8084 lb 328 lb 0 lb 0 lb 0 lb ----- Structure Total: 8412 lb		<u>Structure Notes:</u> 1. KYTC DBI TYPE 3 / ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS & NO INVERT CHANNEL. 4. CASTING BY OTHERS 5. STUB #5 BARS 20" OUT TOP OF WALLS (SPA@12"C/C) 6. RAILING BY OTHERS REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 935.5' Rim to Invert: 5.75' Slack: 1" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	929.75'	0°	26"	24" RCP B WALL	30"	Hole 34	34"	34"	-5"	0"	
Invert 2	929.85'	180°	26"	12" RCP B WALL	16"	Hole 20	20"	20"	-2.8"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 60" Height (Ext): 68"		Weight (Net): 8084 lb Volume (Net): 2.06cu.yd		