

Job Name: 26-2560 Ashtree Subdivision Unit 3 Ph. 1
Job Location: Nicholasville, KY
Contractor: The Allen Company, Inc.

Plant: Beaver Dam

Tech: J. ROSS

8/24/2026 8:12:16 AM

PC: E. BRADLEY



Structure ID: EE1 LEXA

P2 CBITA10LEX-BL

CB INLET LEX A 10' BOTTOM LEFT

- P3) 36" x 120" - CB INLET LEX A 10' TOP LEFT - 12"
P2) 36" x 120" - CB INLET LEX A 10' BOTTOM LEFT - 18"
P1) 36" x 36" - BOX BASE 8inW, 8inF - 30"
1) CASTING - HOE KY-206 F/C (KY CBI A)
1) 36" x 36" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 26
1) Hole - 6
4) MH Step ML-10-TDS-NCR - 10"

2700 lb
3650 lb
4680 lb
206 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb


Structure Total: 11236 lb

Structure Notes:


1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP PHASE TOP - #5 BARS AT 6" C.C.E.W.
 - TOP PHASE BTM - #5 BARS AT 12" C.C.E.W.
 - TOP SLAB - #5 BARS AT 12" C.C.E.W.
 - RISER/WALLS - #5 BARS AT 12" C.C.E.W.
 - FLOOR - #5 BARS AT 12" C.C.E.W.
4. HOE KY-206 F/C CASTING PROVIDED BY ICAST

GENERAL NOTES:

1. MANUFACTURE PER LFUGG SPECIFICATIONS
2. CONCRETE F'C = 4,500 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 12" C/C E.W. (GRADE 60)
4. TOP PHASE OVERALL HEIGHT NOT TO EXCEED 30"
5. REBAR EXTENSIONS TO BE CAPPED AFTER BEING BENT.




JOINT (TONGUE) DETAIL




#5 BENT BAR STUBS


(10 EA. REQUIRED)

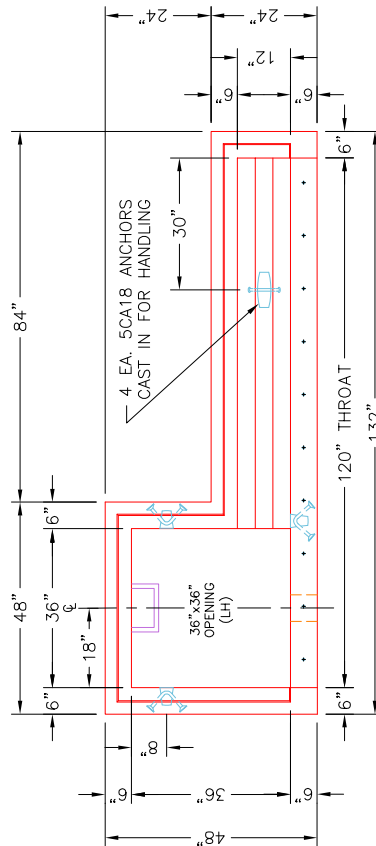

PLAN VIEW

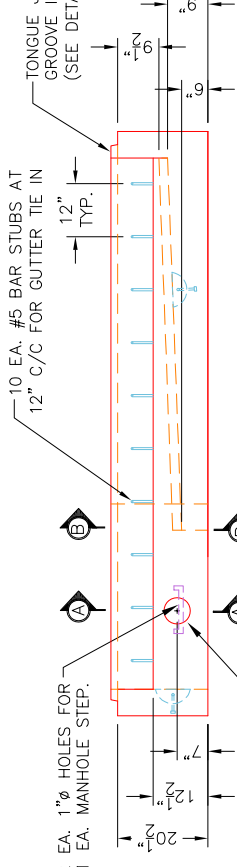


FRONT VIEW

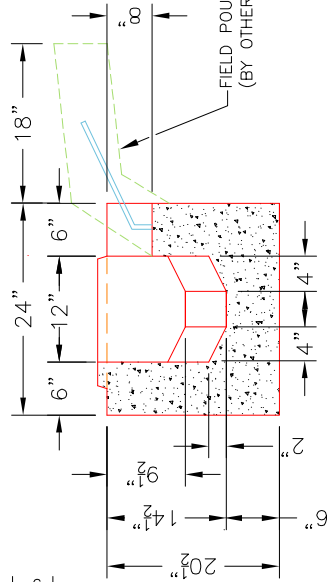


SECTION B-B

ENLARGED VIEW

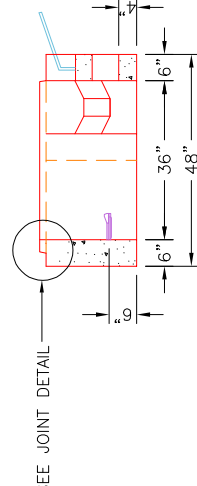

SECTION A-A

PRODUCTION WORK ORDER		PRODUCT I.D.: CBITA10LEX-BL	DESCRIPTION: LFUGG 10' CBI-TYPE A TOP PHASE BOTTOM (LH)	
	QUALITY CONTROL CHECKLIST	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: THE ALLEN COMPANY, INC.	
	☐ ALL DIMENSIONS CORRECT.	PLANT: BEAVER DAM, KY.	PROJECT: ASHTREE SUBDIVISION UNIT 3 PH. 1	
	☐ LIFTERS INSTALLED.	WEIGHT: 3,650 LBS.	STRUCTURE ID.: EE1 LEXA	
	☐ SUBDRAIN HOLE CORRECT.	TOP JOINT: SHIP-LAP TONGUE	SALES ORDER NO.: 26-2560	
	☐ REINFORCING CORRECT.	BOTTOM JOINT: N/A	P.C.: E. BRADLEY	DRAWING: N. RICHARDS
	☐ EXTENDED REBAR INSTALLED.	QC CHECK INITIALS:	DATE: 8/21/26	SCALE: NTS PG. 1 of 1
	☐ LFUGG THROAT CORRECT.			
	☐ ALL PATCHWORK ACCEPTABLE.			

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.