

Job Name: 26-2574 - Moore Grease Traps
Job Location: Clarksville, TN 37043
Contractor: Core & Main LP (Nashville)

Plant: Beaver Dam, KY
6/2/2026 4:40:56 PM

Tech: K. Cardwell
PC: T. Lewis



Structure ID: QL2 GT1000 (3)

P2 BX60120-06LD08




CB FLAT TOP 6"W w/(2) 24" HOLES (Grease Trap) F/F

P3) 24" - CASTING HEIGHT - 7"
P2) 60" x 120" - CB FLAT TOP 6"W w/(2) 24" HOLES (Grease Trap) F/F - 8"
P1) 60" x 120" - BOX BASE 6inW, 6inF F/n - 54"
1) SECONDARY POUR - Baffle Wall
1) 60" x 120" - Conseal CS-102 1.00" (Double)
1) 24" - Conseal CS-102 1.00" (Double)
2) PSX - 8QRS-S NYLO

0 lb
5775 lb
16155 lb
975 lb
0 lb
0 lb
13 lb
Structure Total: 22918 lb

Structure Notes:

1. PER ASTM C-890-13 & ASTM C-913 SPECIFICATIONS
2. CONCRETE: 4,500 PSI AT 28 DAYS
3. REINFORCEMENT: #5 BAR @ 8" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. 2 EA. 7" CASTINGS SUPPLIED BY OTHERS
5. LIFTERS: 4 EA. 5CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN
6. TOP SURFACE TO RECEIVE FLOATED FINISH

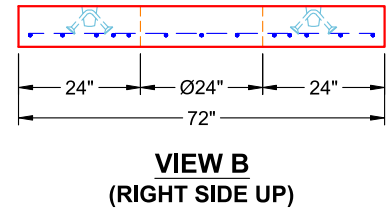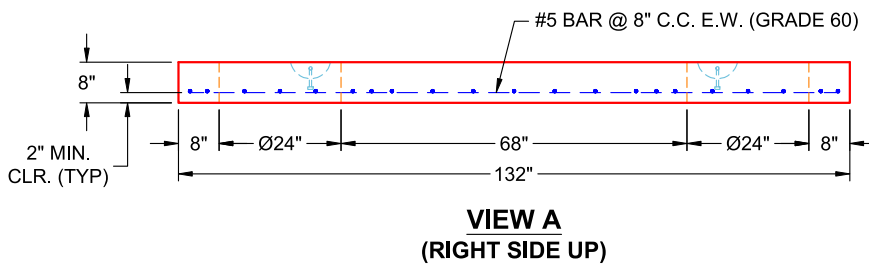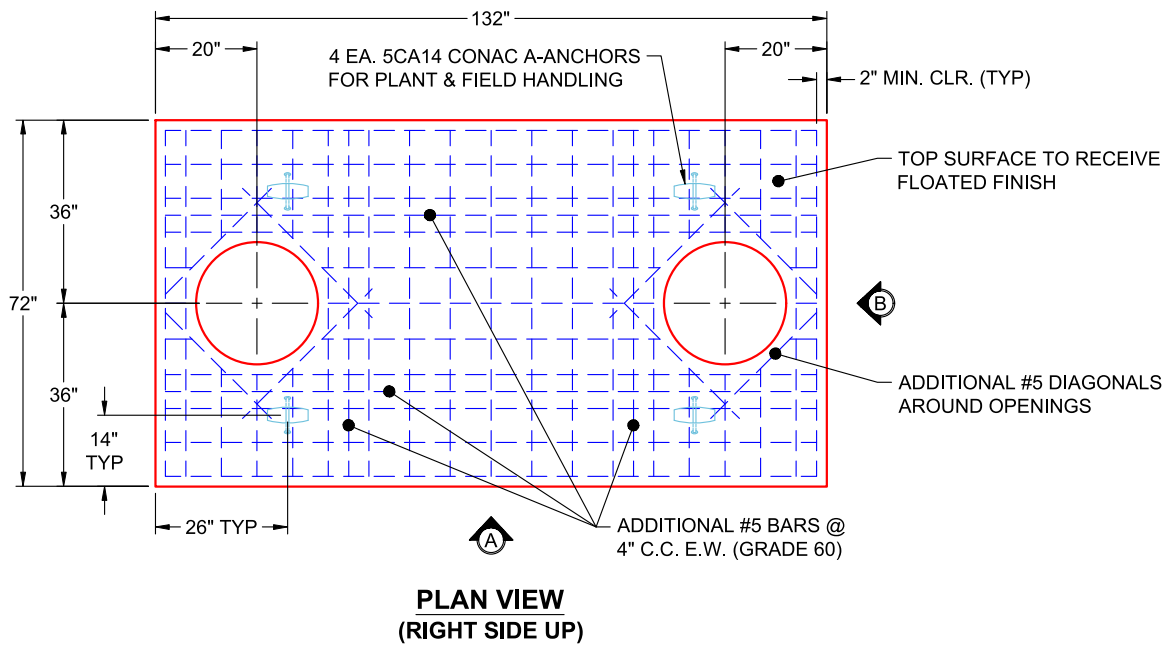

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 6"

Height (Ext): 8"

Weight (Net): 5775 lb
Volume (Net): 1.48cu.yd