



Job Name: 26-2604 ADS Abound Credit Union Job Location: Louisville, KY Contractor: ADS Advanced Drainage Systems, Inc.					Plant: Beaver Dam 7/7/2026 8:31:26 AM		Tech: S. Felletter PC: T. Ryan			
Structure ID: AR3PC										
P2 MH036RS72		MH RISER T/G								
P5) 24" - CASTING HEIGHT - 7" P4) 36" - MH FLAT TOP w/ 24" Ctr. Hole F/G - 10" P3) 36" - MH RISER T/G - 18" P2) 36" - MH RISER T/G - 72" P1) 36" - MH BASE T/h - 18" 1) ASSEMBLY REQUIRED 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) CASTING - HOE MC-375 F/C Storm 3) 36" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) Hole - 12					0 lb 896 lb 759 lb 2937 lb 1525 lb 0 lb 0 lb 0 lb 271 lb 0 lb 0 lb 0 lb ----- Structure Total: 6388 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-375 F/C "STORM"). . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 742.78' Rim to Invert: 5.92' Slack: 1" Sump: 54.96" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	736.86'	0°	11.519"	8" PVC SDR35	8.5"	Hole 12	12"	17.18"	31.46"	11"
Invert 2	736.86'	0°	-11.519"	8" PVC SDR35	8.5"	Hole 12	12"	17.18"	31.46"	-11"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

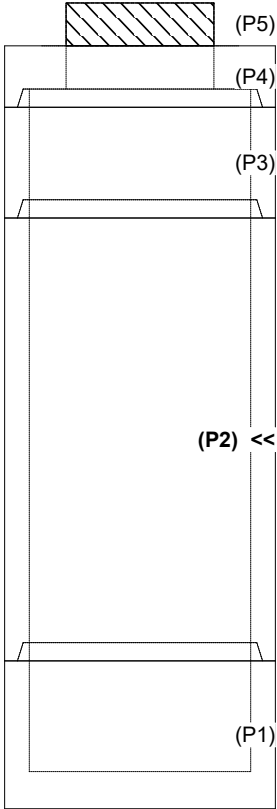


RIGHT-SIDE UP VIEW (int. dimensions)

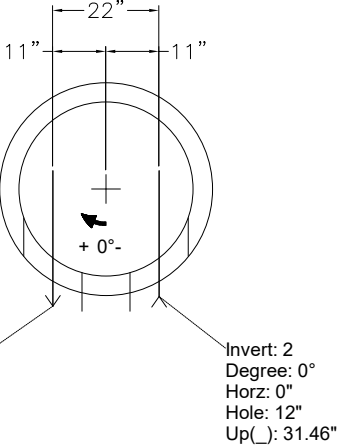

Invert: 1
Degree: 0°
Horz: 0°
Hole: 12"
Up(): 31.46"

Invert: 2
Degree: 0°
Horz: 0°
Hole: 12"
Up(): 31.46"

INSIDE WALL DIMENSIONS

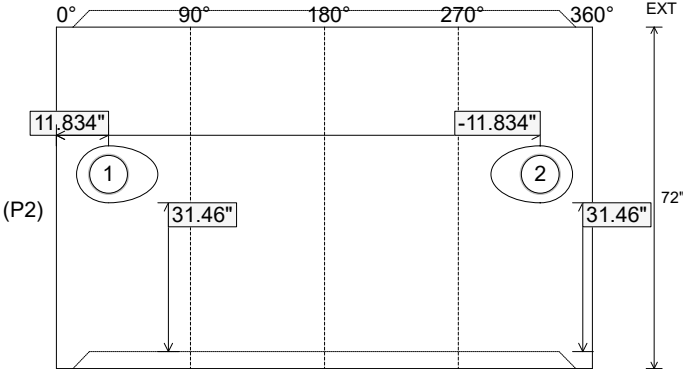

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 4" Floor Height: 0"	Height (Int): 72" Height (Ext): 72"	Weight (Net): 2937 lb Volume (Net): 0.75cu.yd
----------------------------------	------------------------------------	--	--	--