

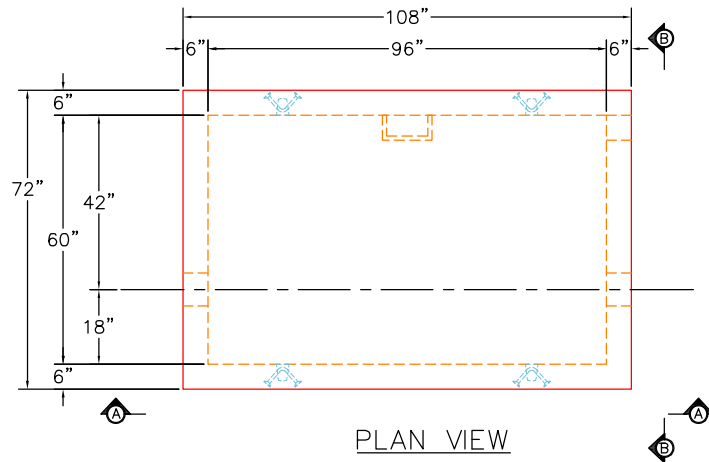


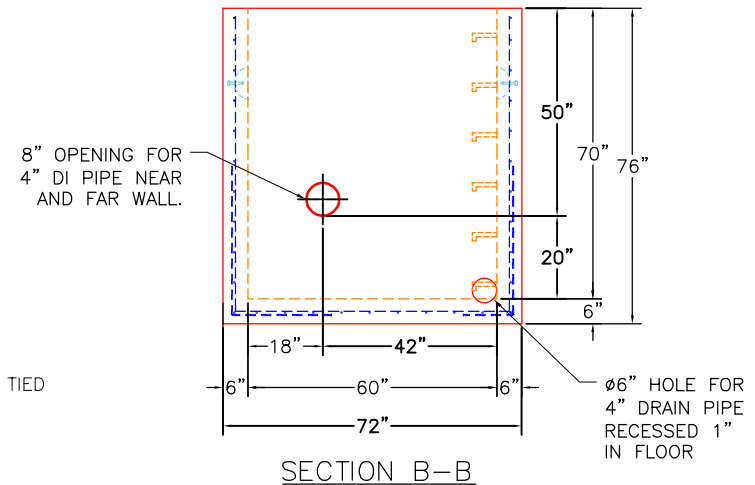

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615. (GRADE 60).
- WALLS/FLOOR (As .12) #5 BARS AT 12" C.C.E.W.
4. WEIGHTS: TOTAL = 15,692 LBS
FIRST POUR = 3,915 LBS
SECOND POUR = 11,777 LBS
5. JOINT TO BE SEALED W/ CS-102 SEALANT.

FIRST POUR DRAWING

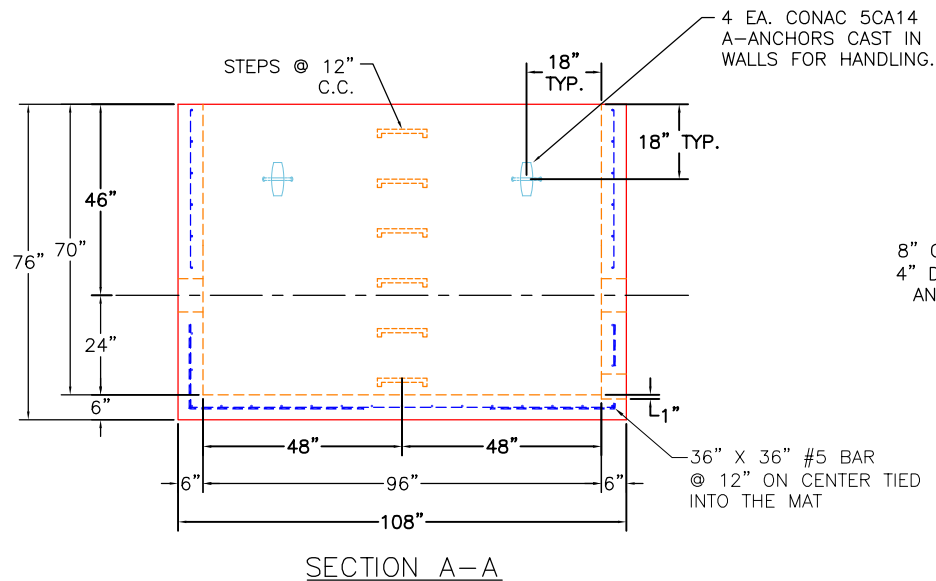

PRODUCTION WORK ORDER



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ OPENING CORRECT LOCATION(S).
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT I.D.: BX6096-06W06F-BAVF

PRODUCT VIEW: UPSIDE DOWN

PLANT: BEAVER DAM, KY.

WEIGHT: 15,692 LBS.

TOP SECTION JOINT: N/A

BASE SECTION JOINT: N/A

QC CHECK INITIALS:

DESCRIPTION: 5' X 8' X 70" TALL VAULT BASE

CUSTOMER: MCCAIN BROS EXCAVATING LLC

PROJECT: SOUTH ANDERSON WATER DISTRICT

STRUCTURE: SAWD VAULT

ORDER NO: 26-2640


PC: C. GOFF

DRAWING: S. FELLETER

DATE: 06/11/26

SCALE: NTS



PG. 1 of 1

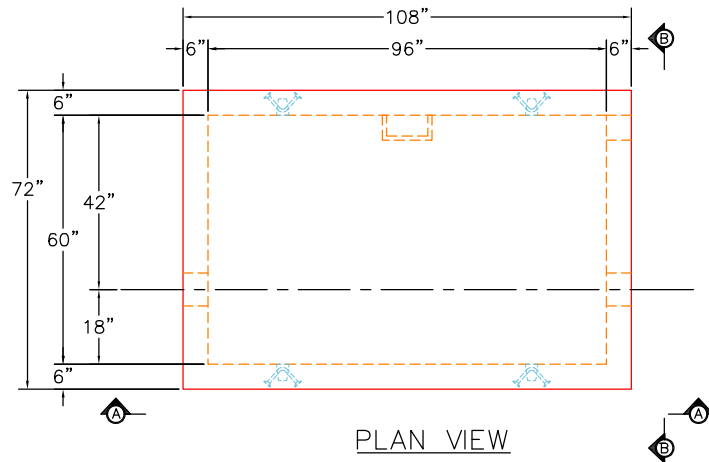

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615. (GRADE 60).
- WALLS/FLOOR (As .12) #5 BARS AT 12" C.C.E.W.
4. WEIGHTS: TOTAL = 15,692 LBS
FIRST POUR = 3,915 LBS
SECOND POUR = 11,777 LBS
5. JOINT TO BE SEALED W/ CS-102 SEALANT.

SECOND POUR DRAWING

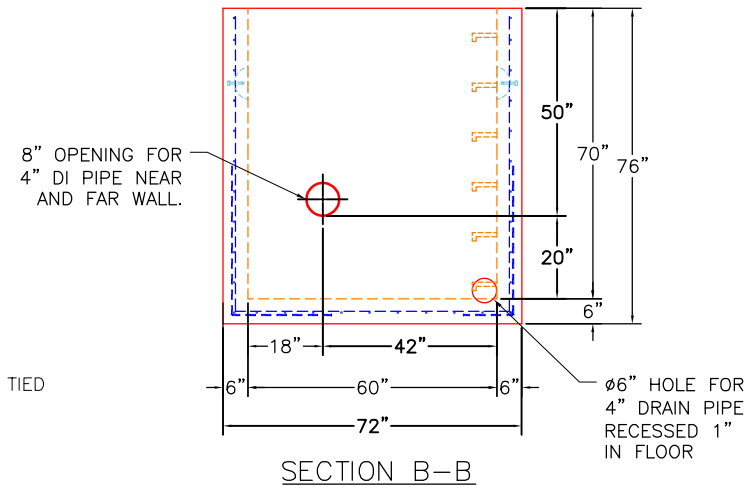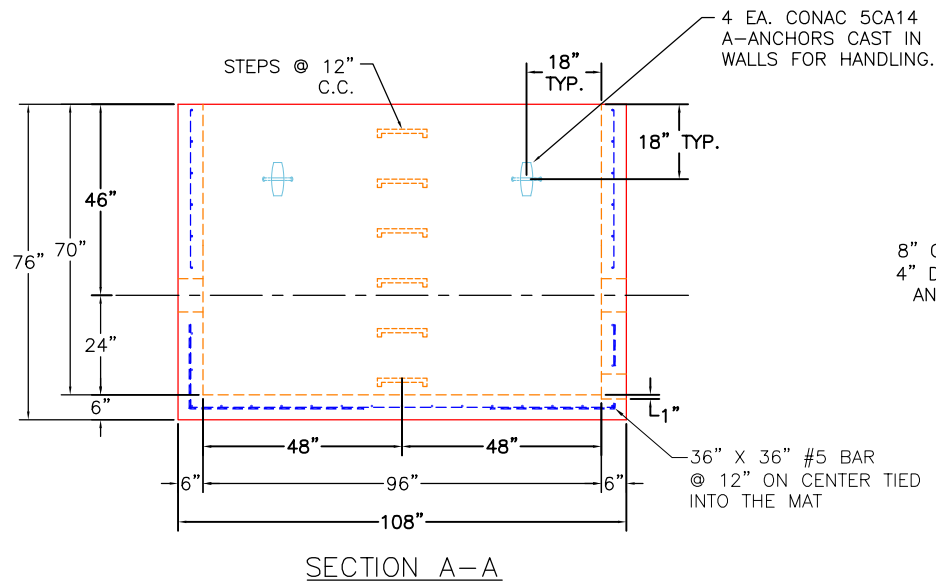

PRODUCTION WORK ORDER



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ OPENING CORRECT LOCATION(S).
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT I.D.: BX6096-06W06F-BAVF

PRODUCT VIEW: UPSIDE DOWN

PLANT: BEAVER DAM, KY.

WEIGHT: 15,692 LBS.

TOP SECTION JOINT: N/A

BASE SECTION JOINT: N/A

QC CHECK INITIALS:

DESCRIPTION: 5' X 8' X 70" TALL VAULT BASE

CUSTOMER: MCCAIN BROS EXCAVATING LLC

PROJECT: SOUTH ANDERSON WATER DISTRICT

STRUCTURE: SAWD VAULT

ORDER NO: 26-2640

PC: C. GOFF

DRAWING: S. FELLETER

DATE: 06/11/26

SCALE: NTS

PG. 1 of 1