

Job Name: 26-2648 Midtown Commons Apartments
Job Location: Madisonville, KY
Contractor: Steve Pleasant Excavating

Plant: Beaver Dam

7/20/2026 10:46:15 AM

Tech: S. Felletter

PC:



Structure ID: 2.2 MHA

P2 MH060LD13

MH FLAT LID w/24in ECC Hole F/G

- P3) 24" - CASTING HEIGHT - 4"
P2) 60" - MH FLAT LID w/24in ECC Hole F/G - 13"
P1) 60" - MH BASE T/n - 72"
1) CASTING - HOE KY-206 F/C (KY TY1)
1) 60" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 38
6) MH Step ML-10-TDS-NCR - 10"


0 lb
2800 lb
9030 lb
206 lb
0 lb
0 lb
0 lb
0 lb

12036 lb

Structure Notes:
1. PER KYTC MH A / ASTM C478 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE KY-206 F/C).

REINFORCING PER ASTM A615 (GRADE 60.)
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.


Structure Total:

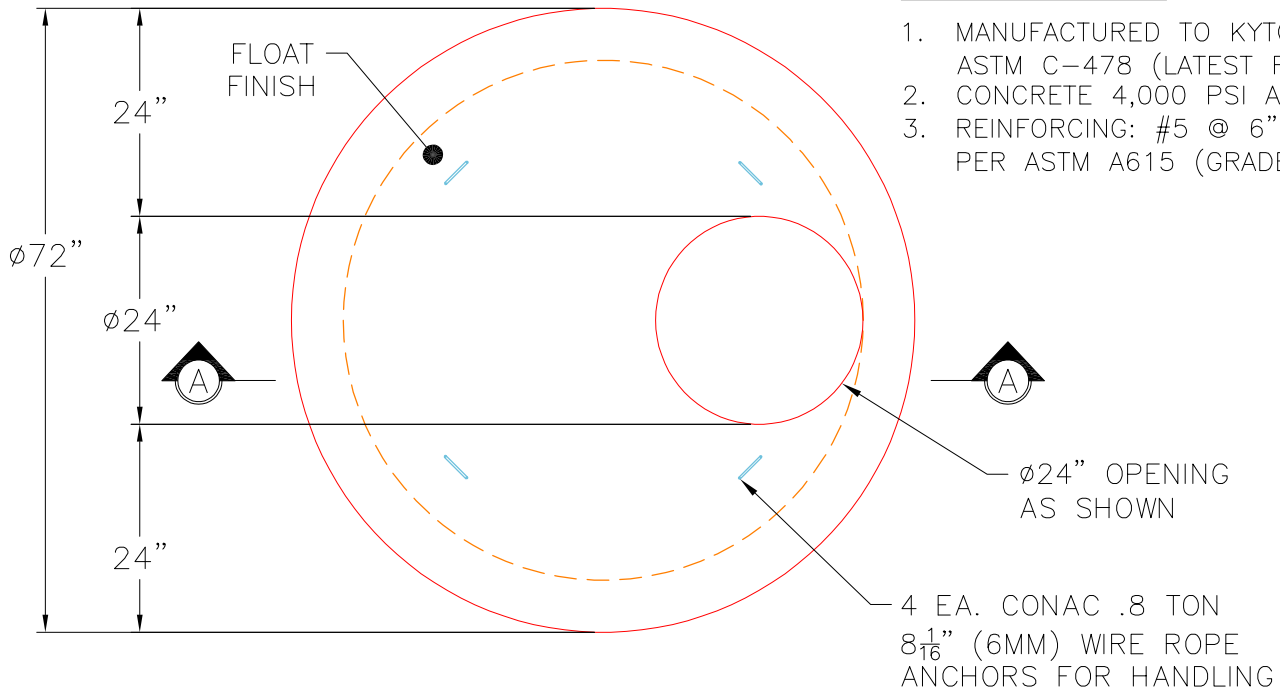

GENERAL NOTES:

1. MANUFACTURED TO KYTC MHA/ASTM C-478 (LATEST REVISION).
2. CONCRETE 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 @ 6" C.C. E.W. PER ASTM A615 (GRADE 60)

TOP VIEW

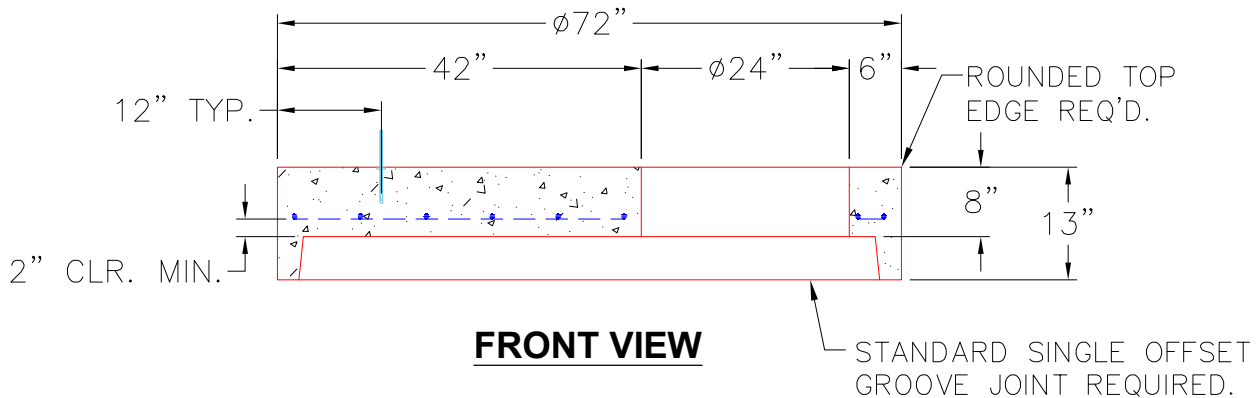

FRONT VIEW

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 6"

Height (Ext): 13"

Weight (Net): 2800 lb
Volume (Net): 0.69cu.yd