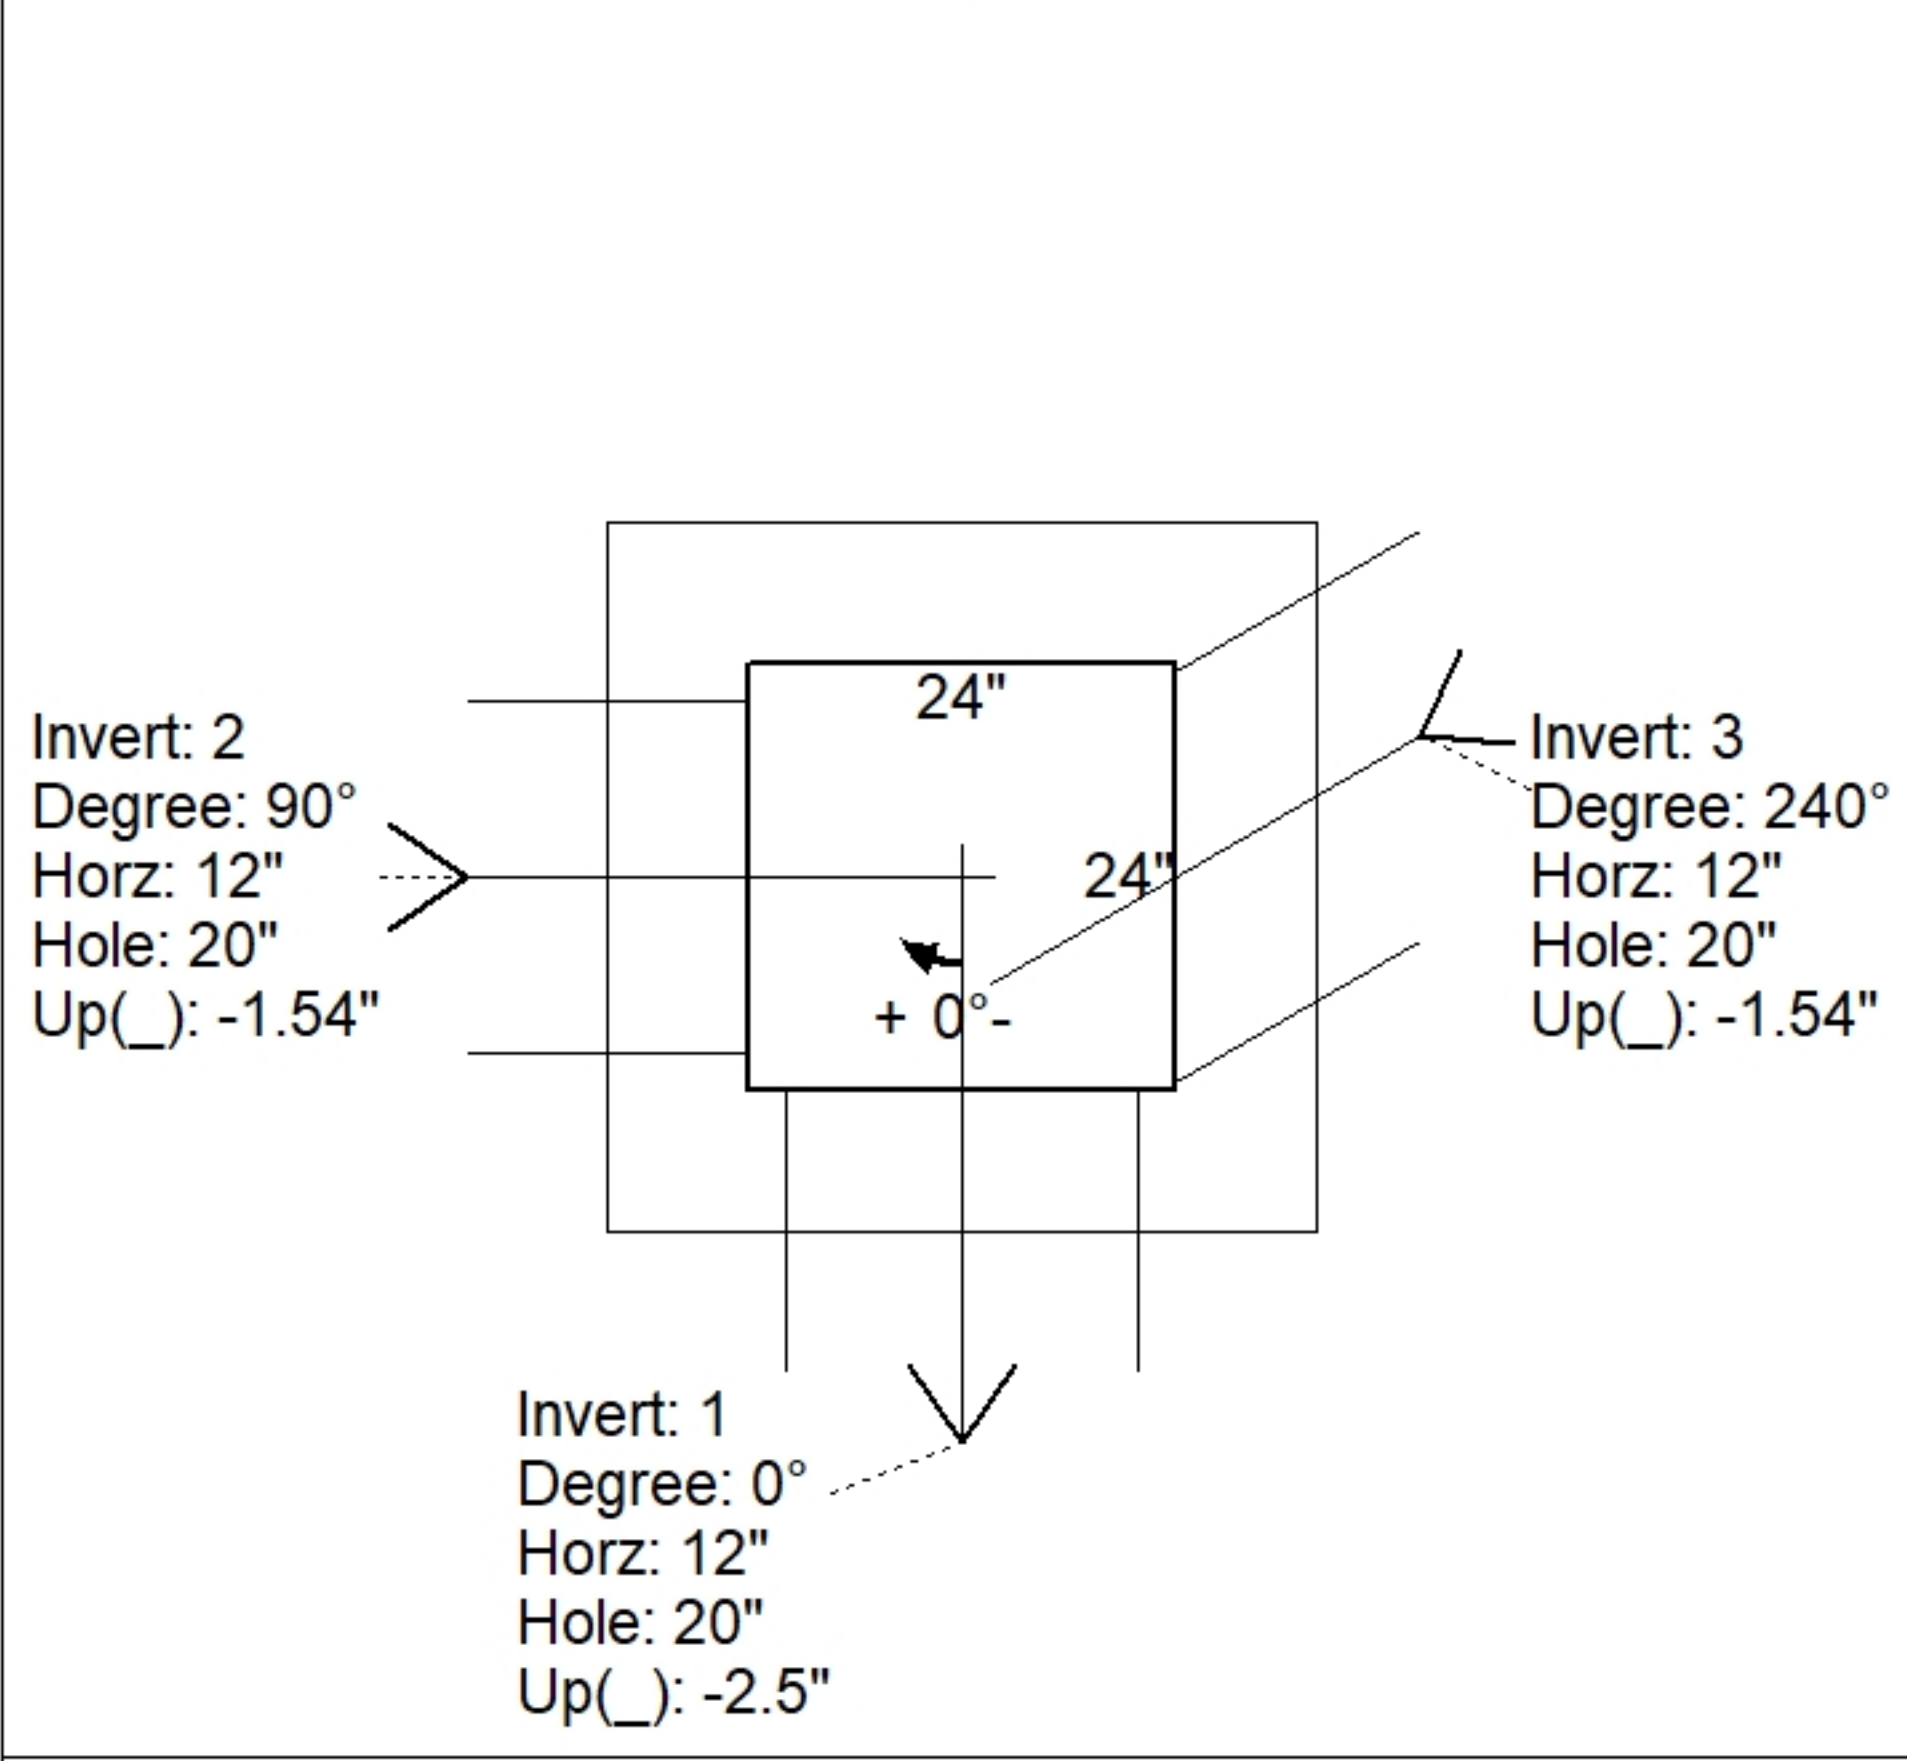
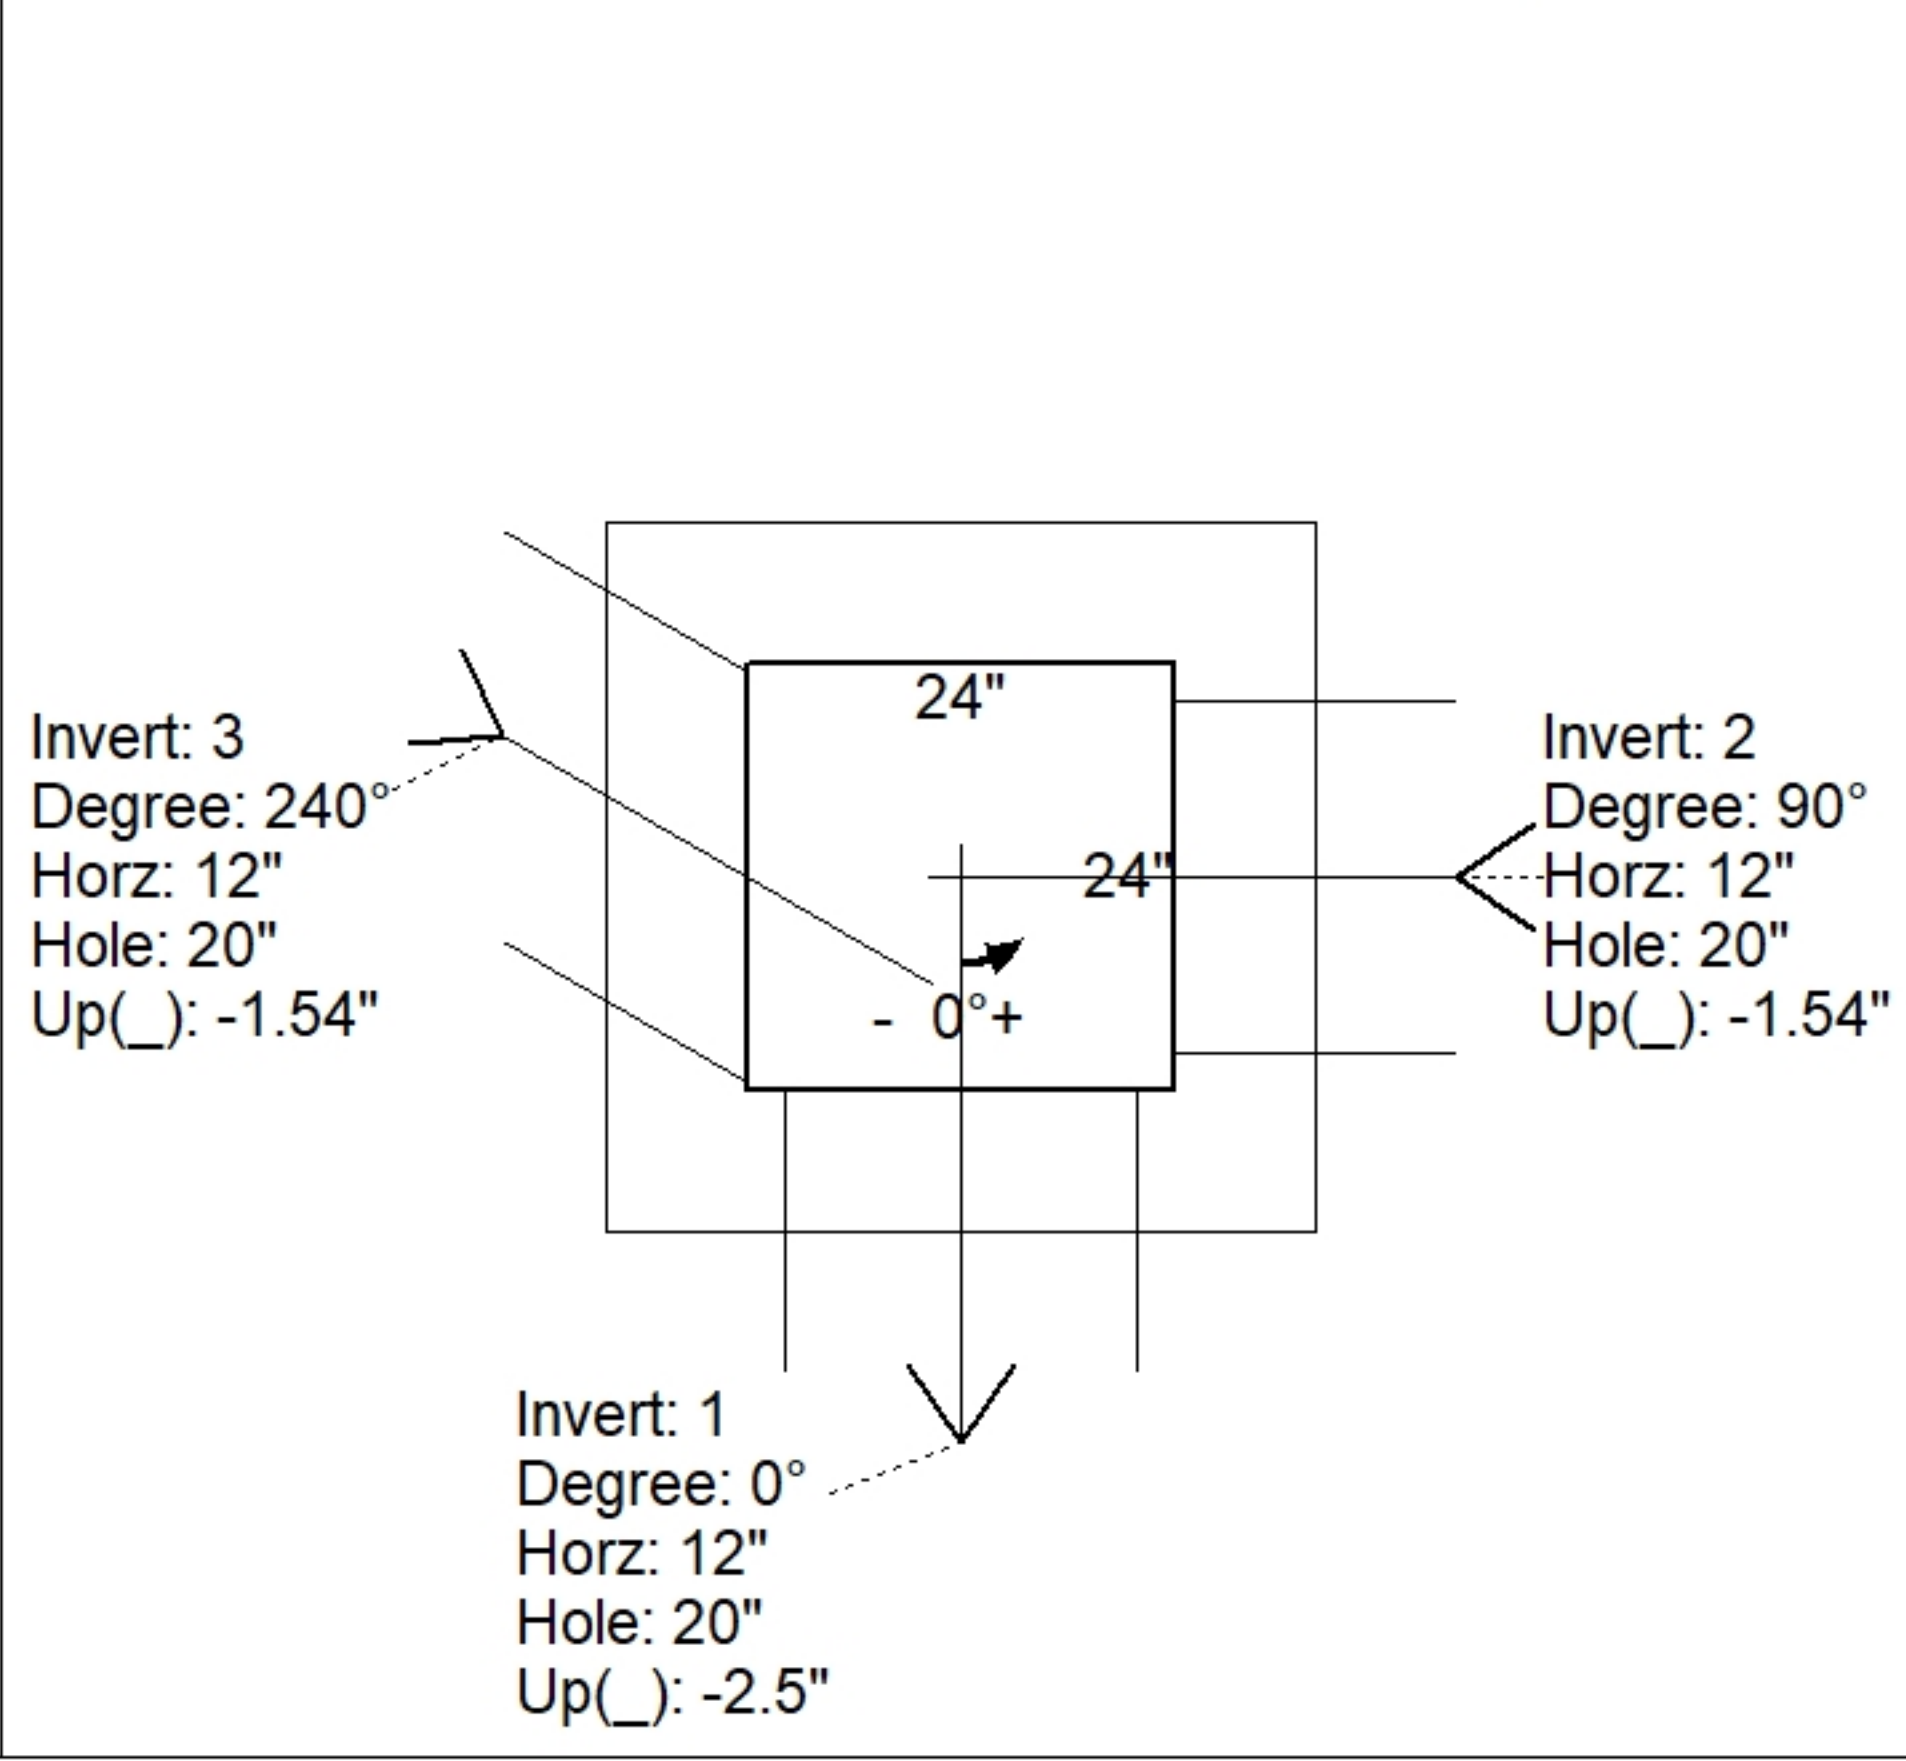
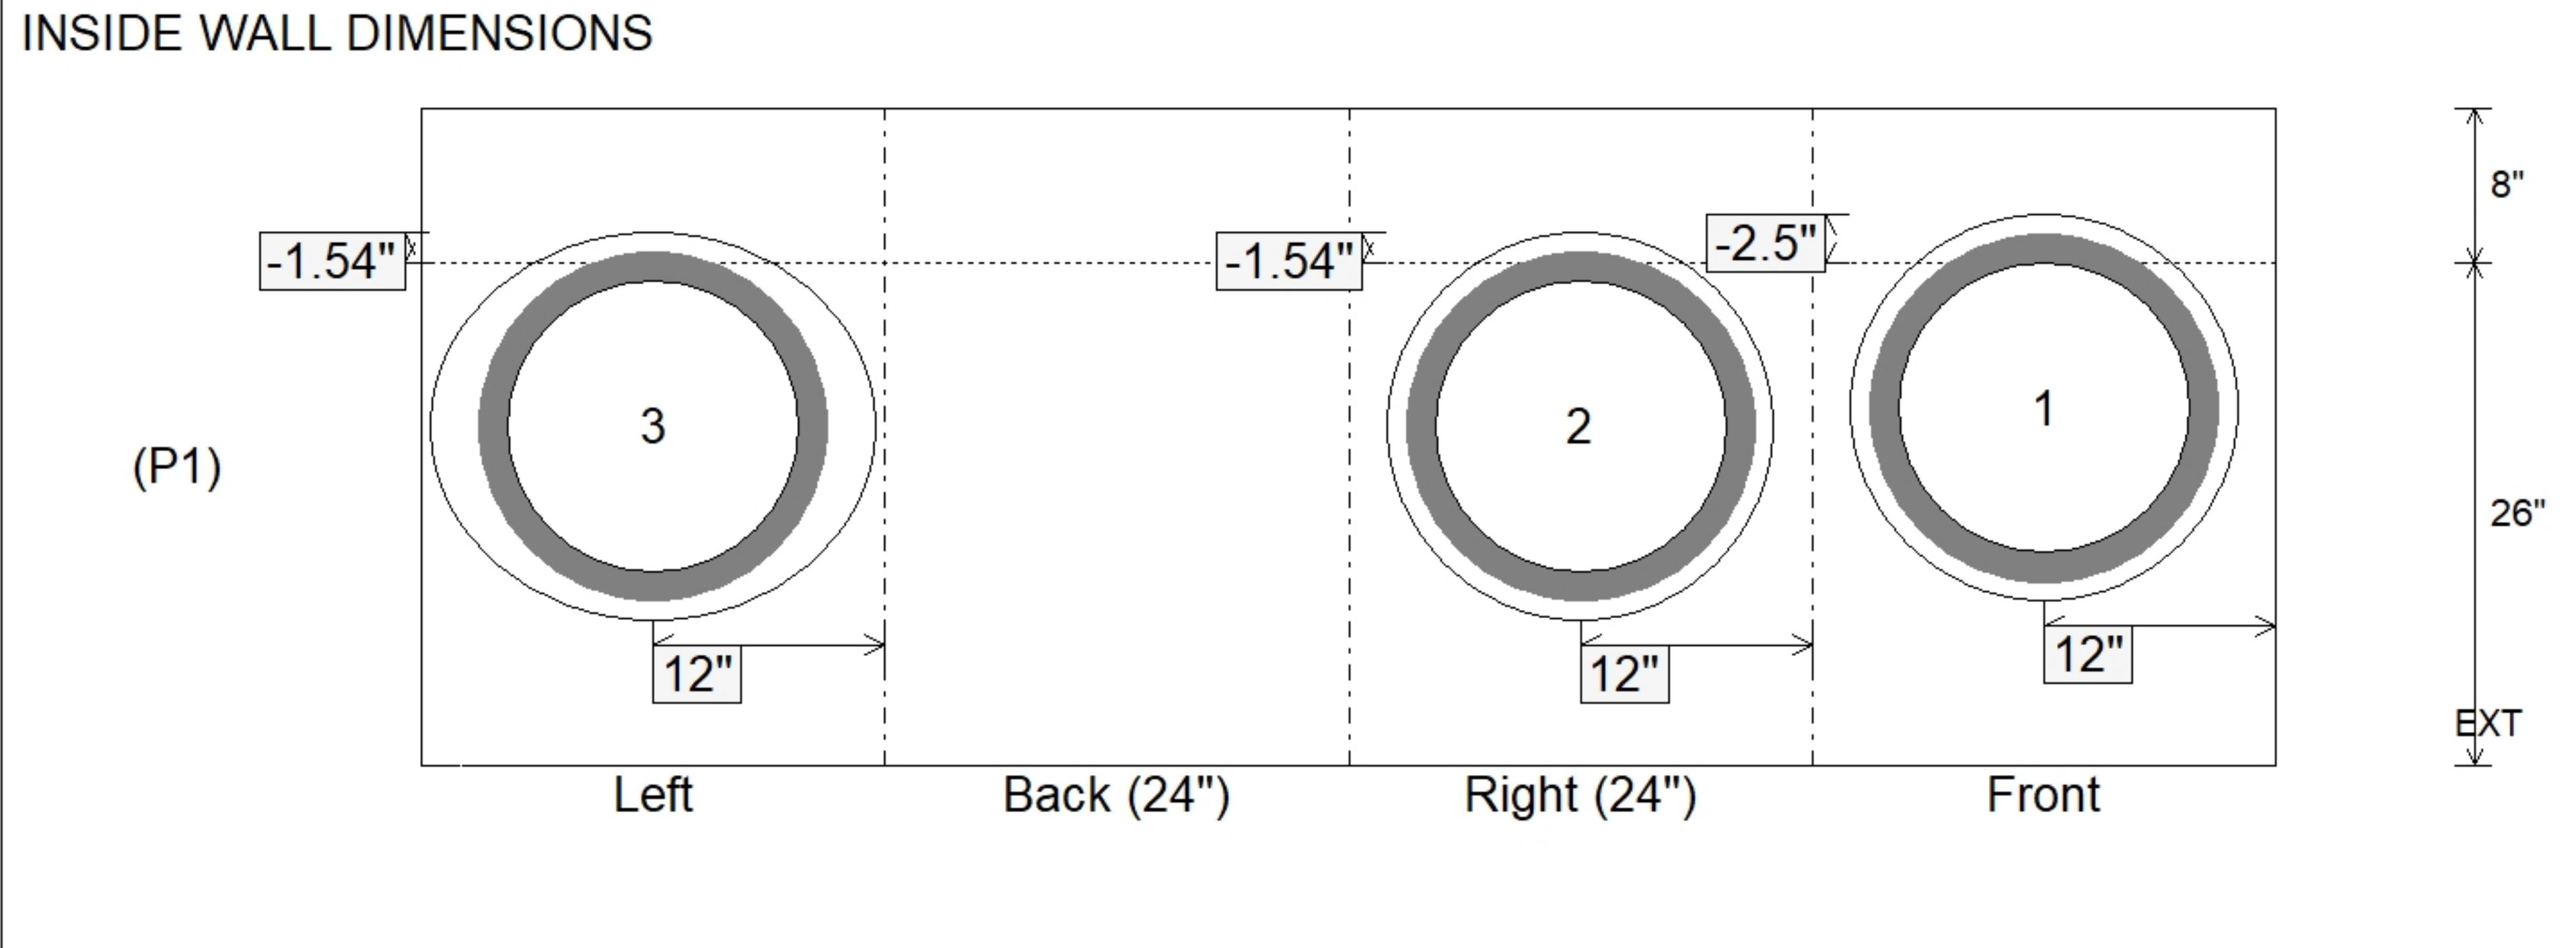


Job Name: 26-2648 Midtown Commons Apartments Job Location: Madisonville, KY Contractor: Steve Pleasant Excavating				Plant: Beaver Dam 7/20/2026 10:44:16 AM		Tech: S. Felletter PC:				
Structure ID: 4.2 DBI14										
P1		BX2424-08BAVF		BOX BASE 8inW, 8inF, Variable Ht F/n						
P3) 19.5" - CASTING (cast in) - 2.75" P2) 24" x 24" - CB FLAT TOP 8"W (HOE KY-210) F/F - 8" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 26" 1) CASTING - HOE KY-210 F/G (DBI 14) 1) This Structure Includes a Cast-in Item 1) 24" x 24" - Conseal CS-102 1.00" 3) Hole - 20						0 lb 943 lb 2643 lb 178 lb 0 lb 0 lb 0 lb ----- Structure Total: 3764 lb		Structure Notes: 1. KYTC DBI TYPE 14 / ASTM C913 SPECIFICATIONS 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. DBI-14 F/G CAST INTO TOP SLAB (HOE KY-210 F/G RADIAL). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
Rim: 433.08' Rim to Invert: 2.9' Slack: 0.8" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	430.18'	0°	20"	15" ADS N-12	18"	Hole 20	20"	20"	-2.5"	0"
Invert 2	430.26'	90°	20"	15" ADS N-12	18"	Hole 20	20"	20"	-1.54"	0"
Invert 3	430.26'	240°	15.381"	15" ADS N-12	18"	Hole 20	20"	23.094"	-1.54"	6"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions)  INSIDE WALL DIMENSIONS  Coating (Int): Coating (Ext): Seam Up: Flat Seam Dn: n/a Wall Thickness: 8" Floor Height: 8" Height (Int): 26" Height (Ext): 34" Weight (Net): 2643 lb Volume (Net): 0.68cu.yd										