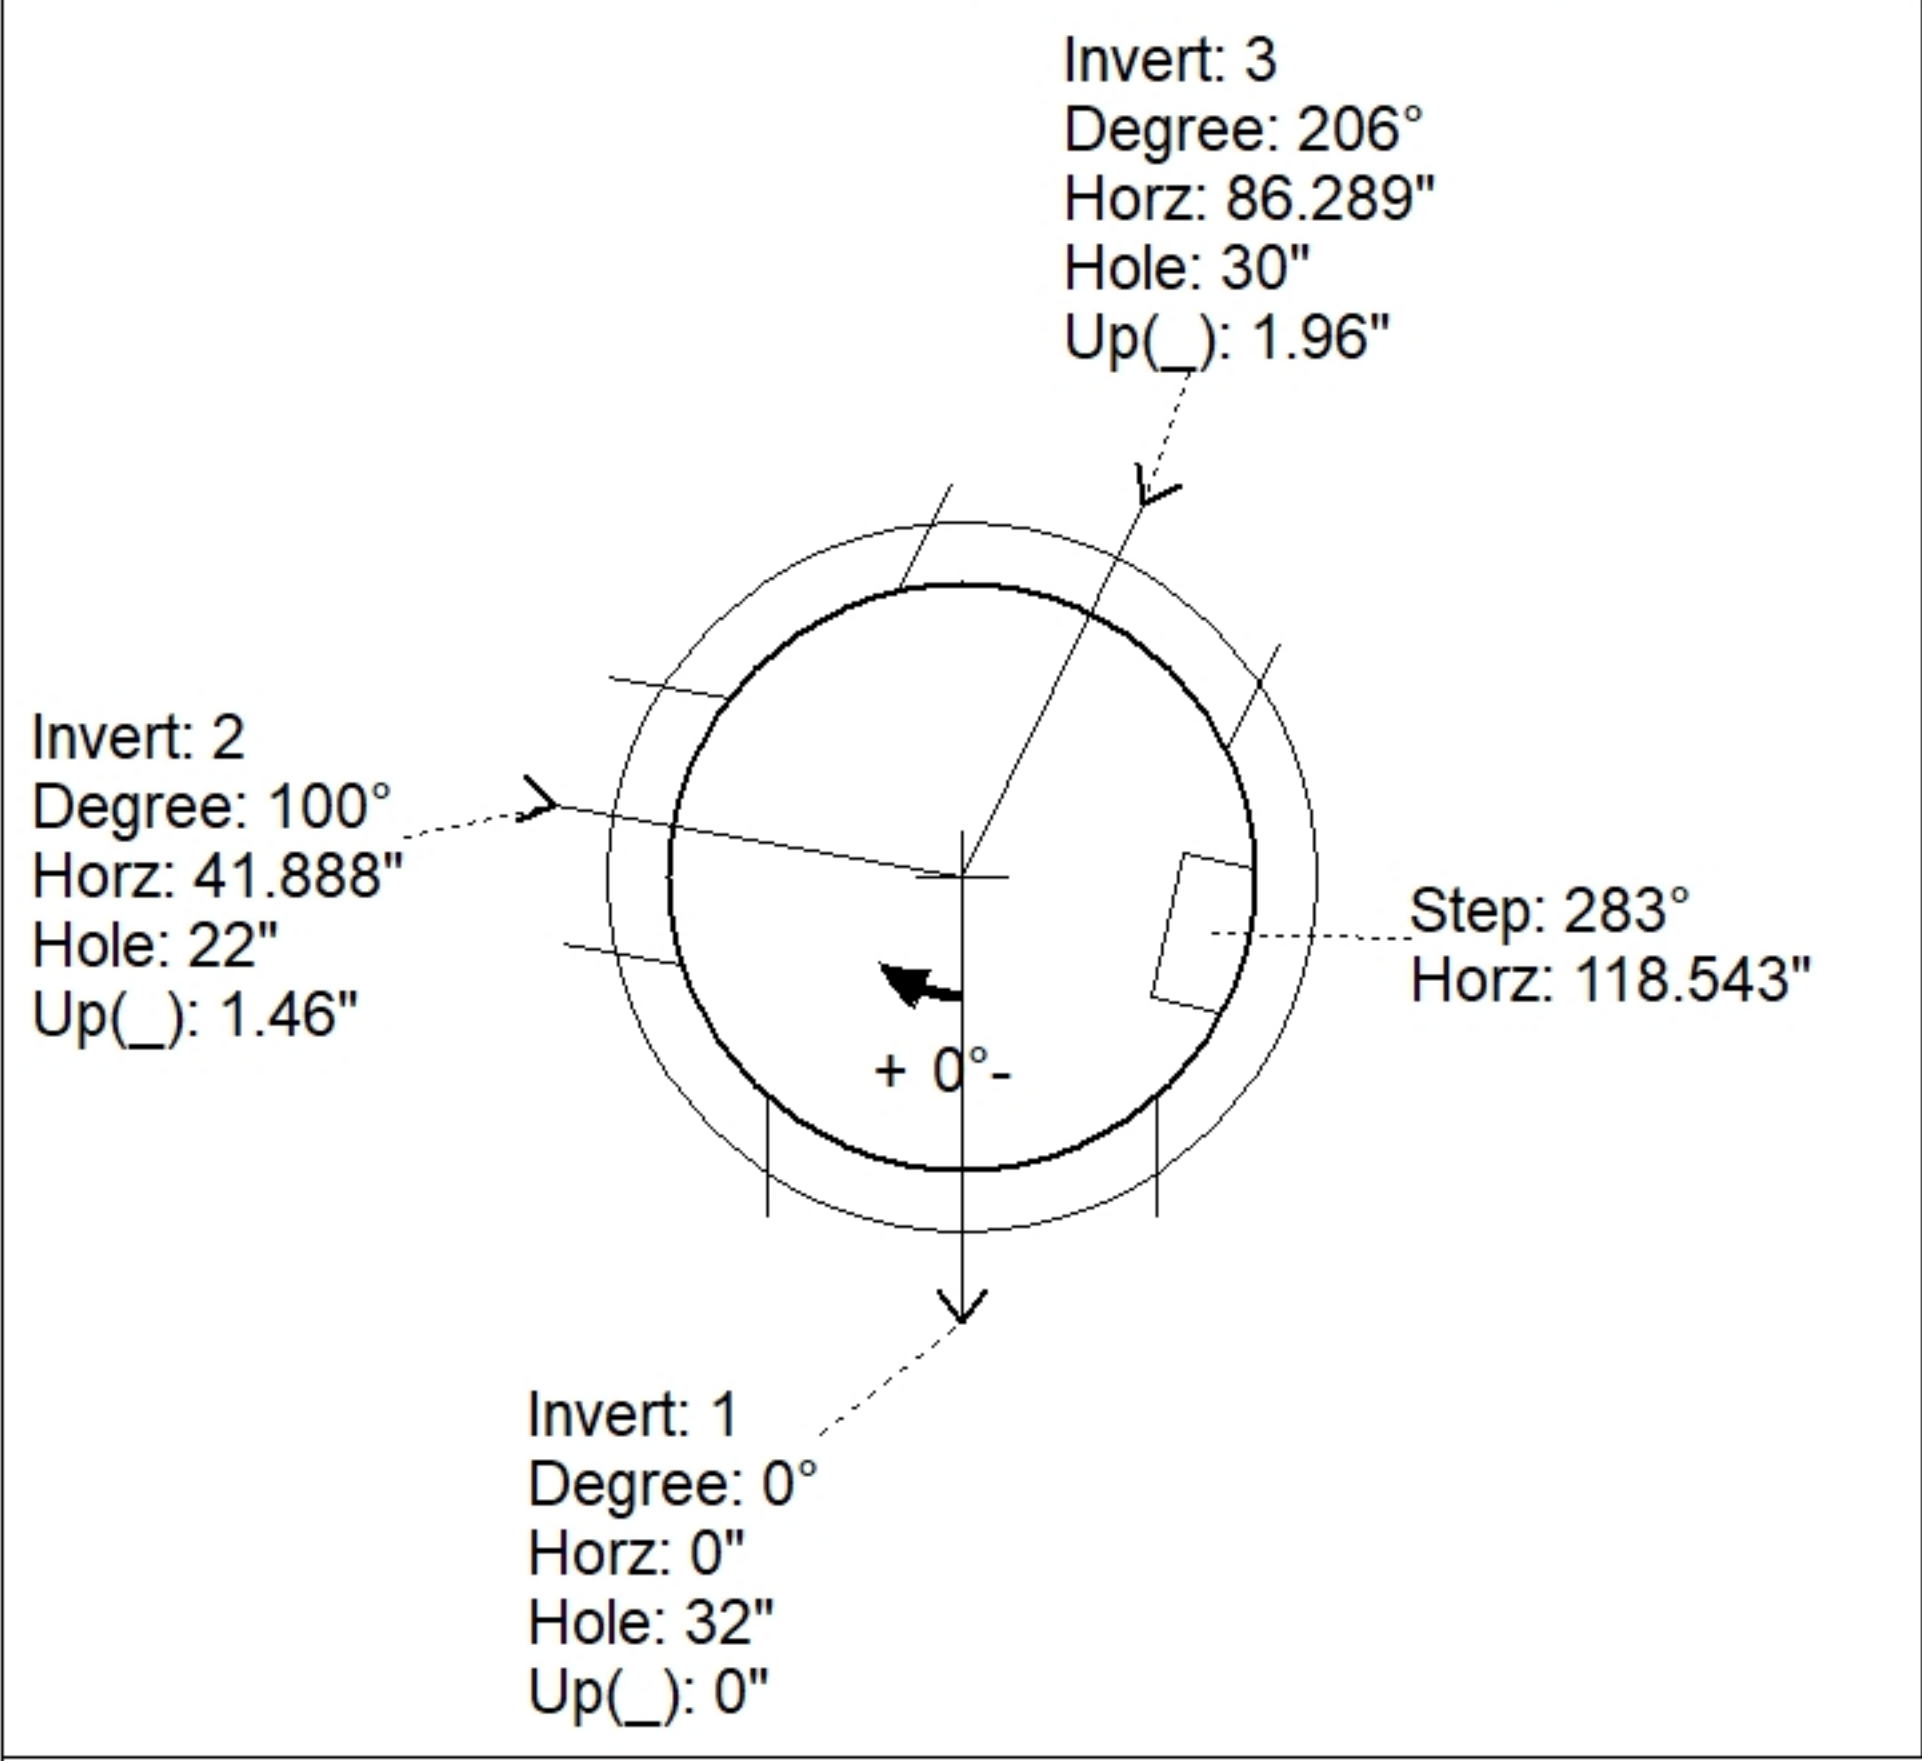
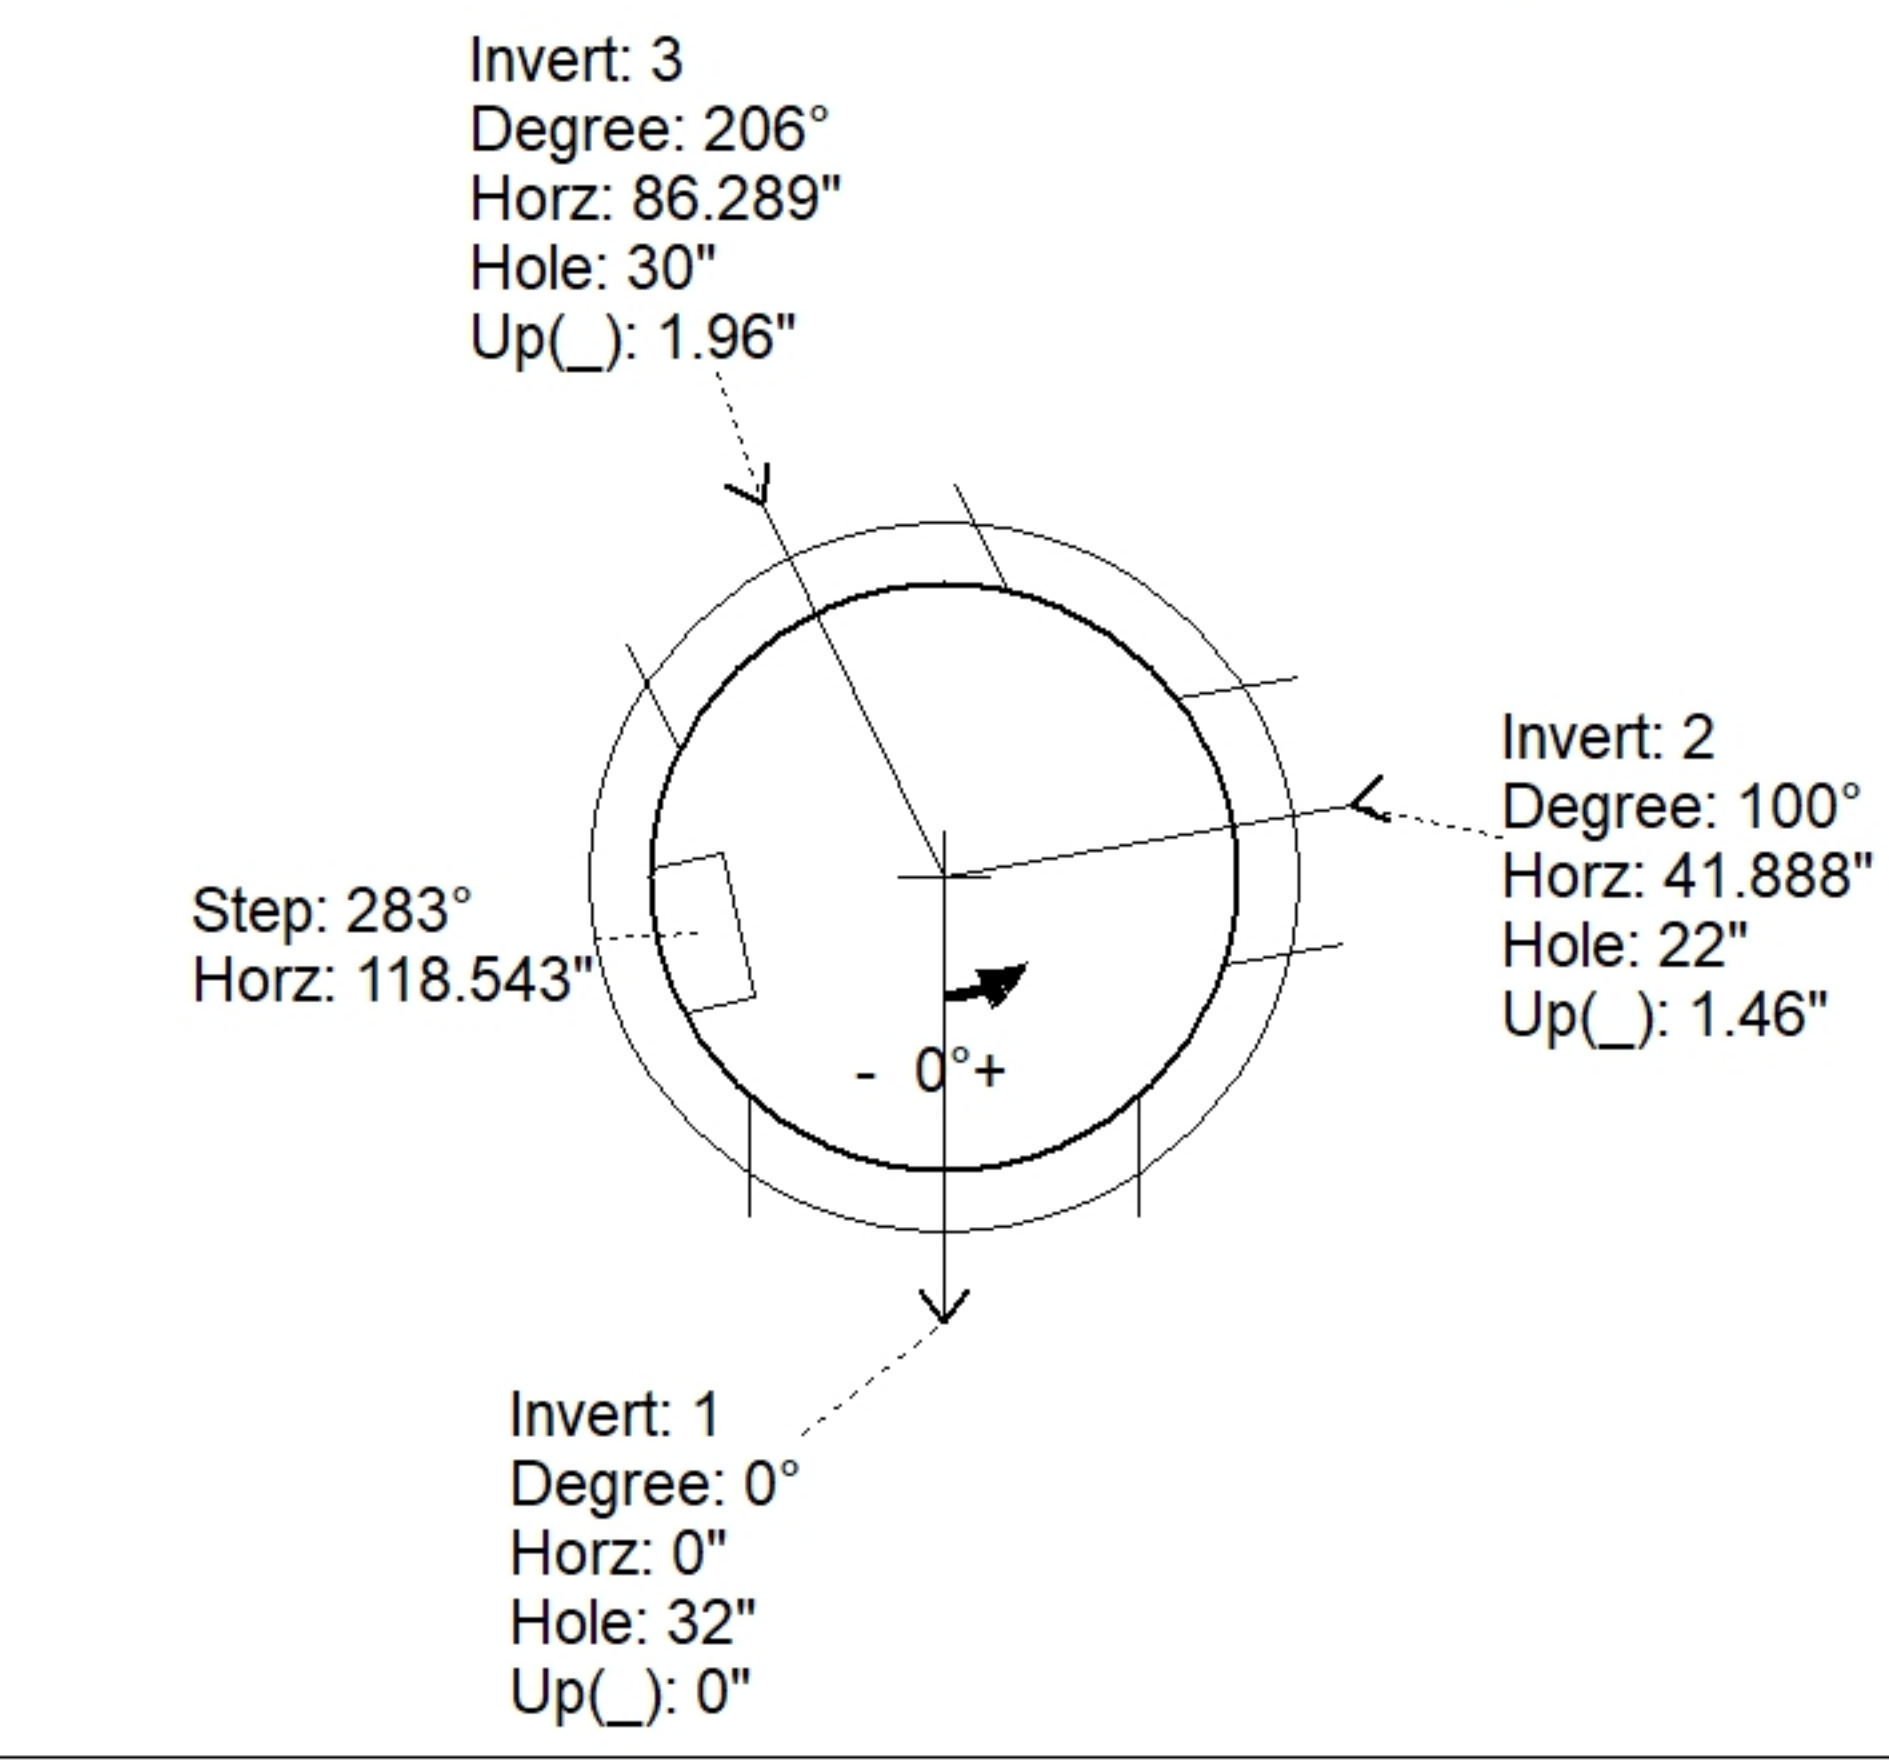
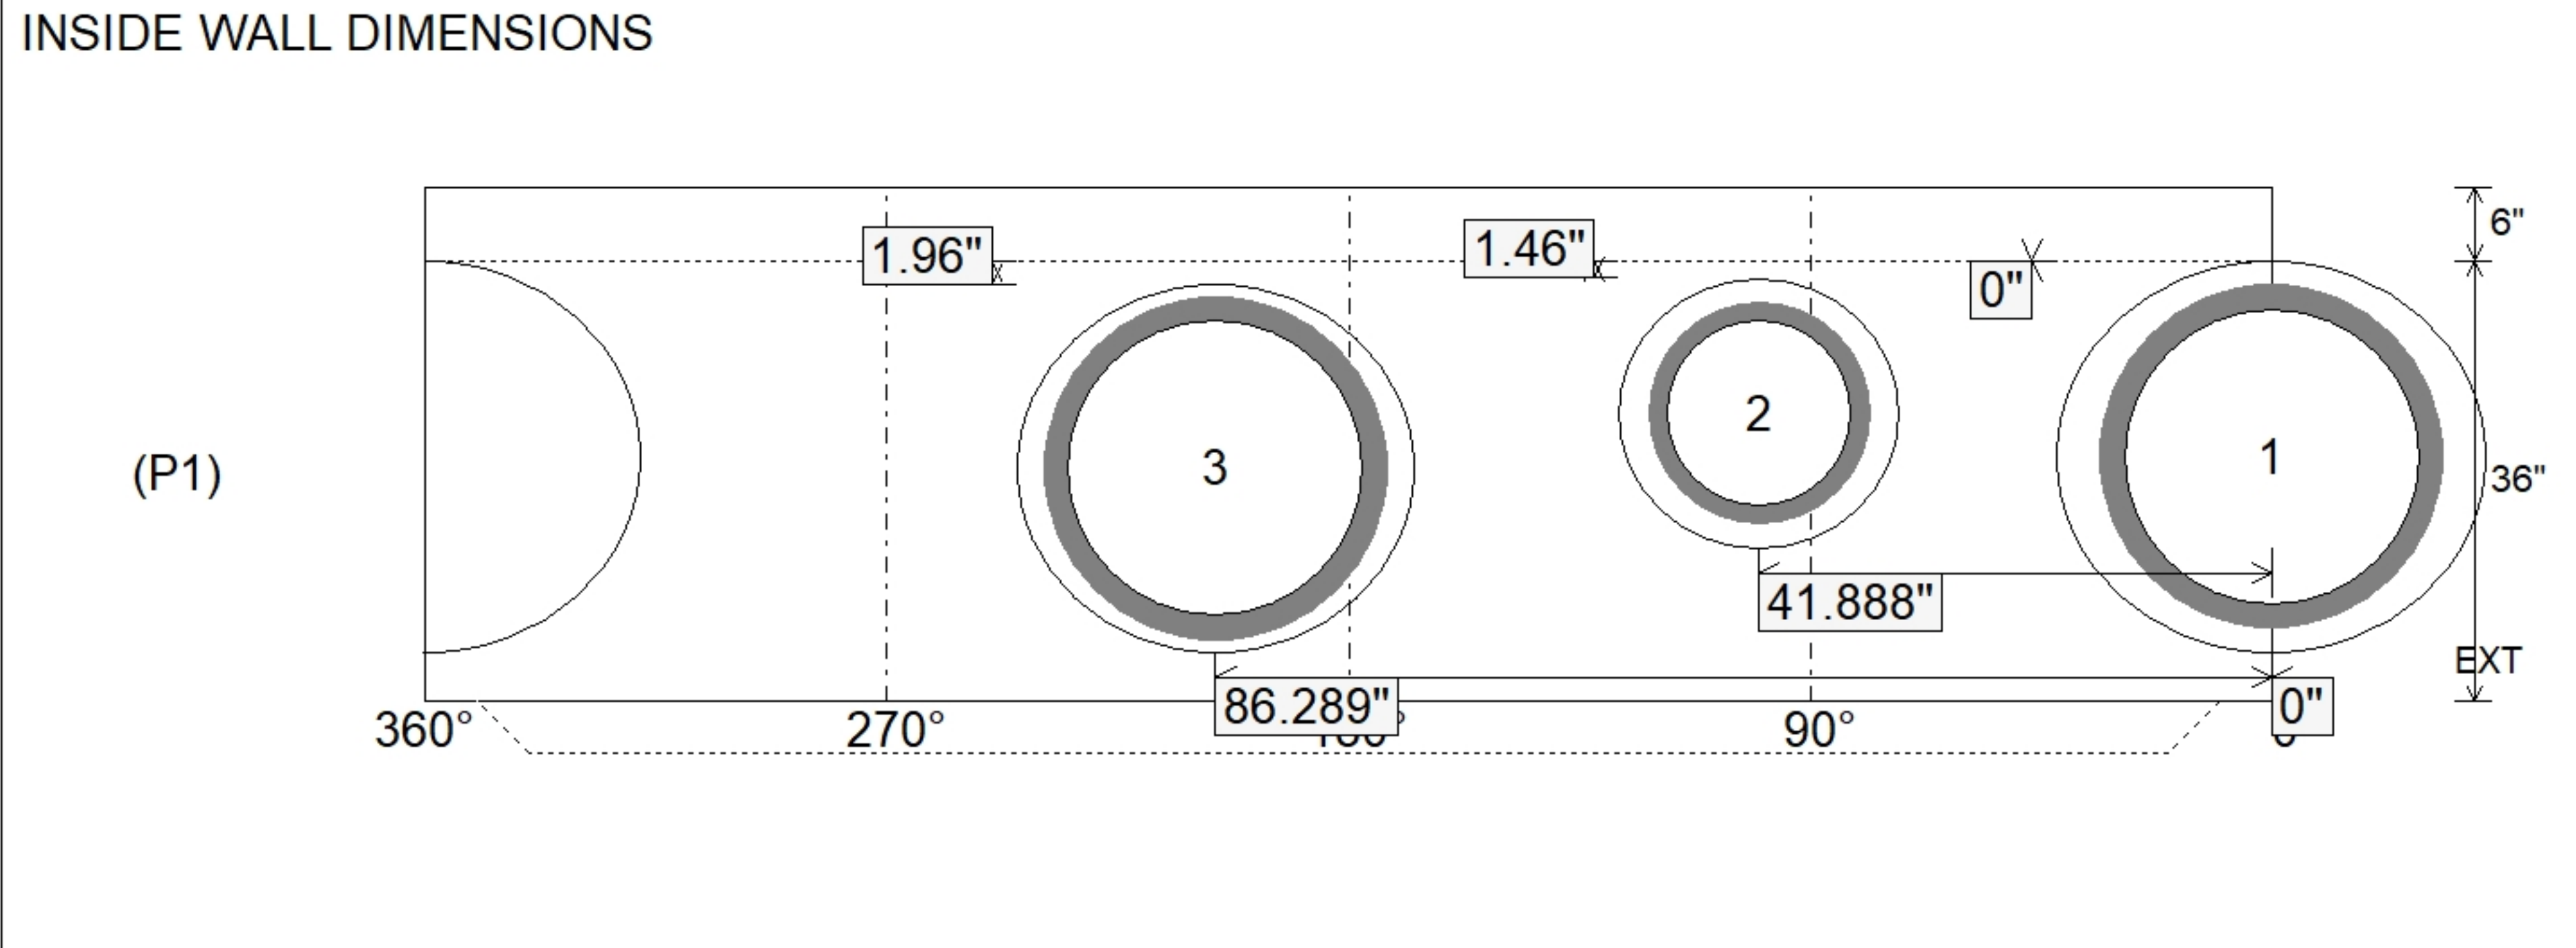


Job Name: 26-2648 Midtown Commons Apartments Job Location: Madisonville, KY Contractor: Steve Pleasant Excavating				Plant: Beaver Dam 7/20/2026 10:44:17 AM		Tech: S. Felletter PC:						
Structure ID: 4.4 MHA												
P1 MH048BA36			MH BASE T/n									
P4) 24" - CASTING HEIGHT - 8" P3) 24" - GRADE RING F/F - 4" P2) 48" - ECC CONE w/ 24" HOLE F/G - 30" P1) 48" - MH BASE T/n - 36" 1) CASTING - HOE KY-206 F/C (KY TY1) 1) 48" - Conseal CS-102 1.00" 2) 24" - Conseal CS-102 1.00" 1) Hole - 32 1) Hole - 22 1) Hole - 30 6) MH Step ML-10-TDS-NCR - 10"						0 lb 270 lb 2050 lb 3001 lb 206 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 5527 lb		Structure Notes: 1. PER KYTC MH A / ASTM C478 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-206 F/C). REINFORCING PER ASTM A615 (GRADE 60.) - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.				
Rim: 435.3' Rim to Invert: 6.3' Slack: 1.6" Sump: 4" Step Position: 283°												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	429'	0°	0"	24" ADS N-12	28"	Hole 32	32"	35.027"	0"	0"		
Invert 2	429.08'	100°	50.615"	15" ADS N-12	18"	Hole 22	22"	22.854"	1.46"	0"		
Invert 3	429.08'	206°	104.266"	24" ADS N-12	28"	Hole 30	30"	32.406"	1.96"	0"		
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions) 												
INSIDE WALL DIMENSIONS 												
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 5" Floor Height: 6"		Height (Int): 36" Height (Ext): 42"		Weight (Net): 3001 lb Volume (Net): 0.77cu.yd			