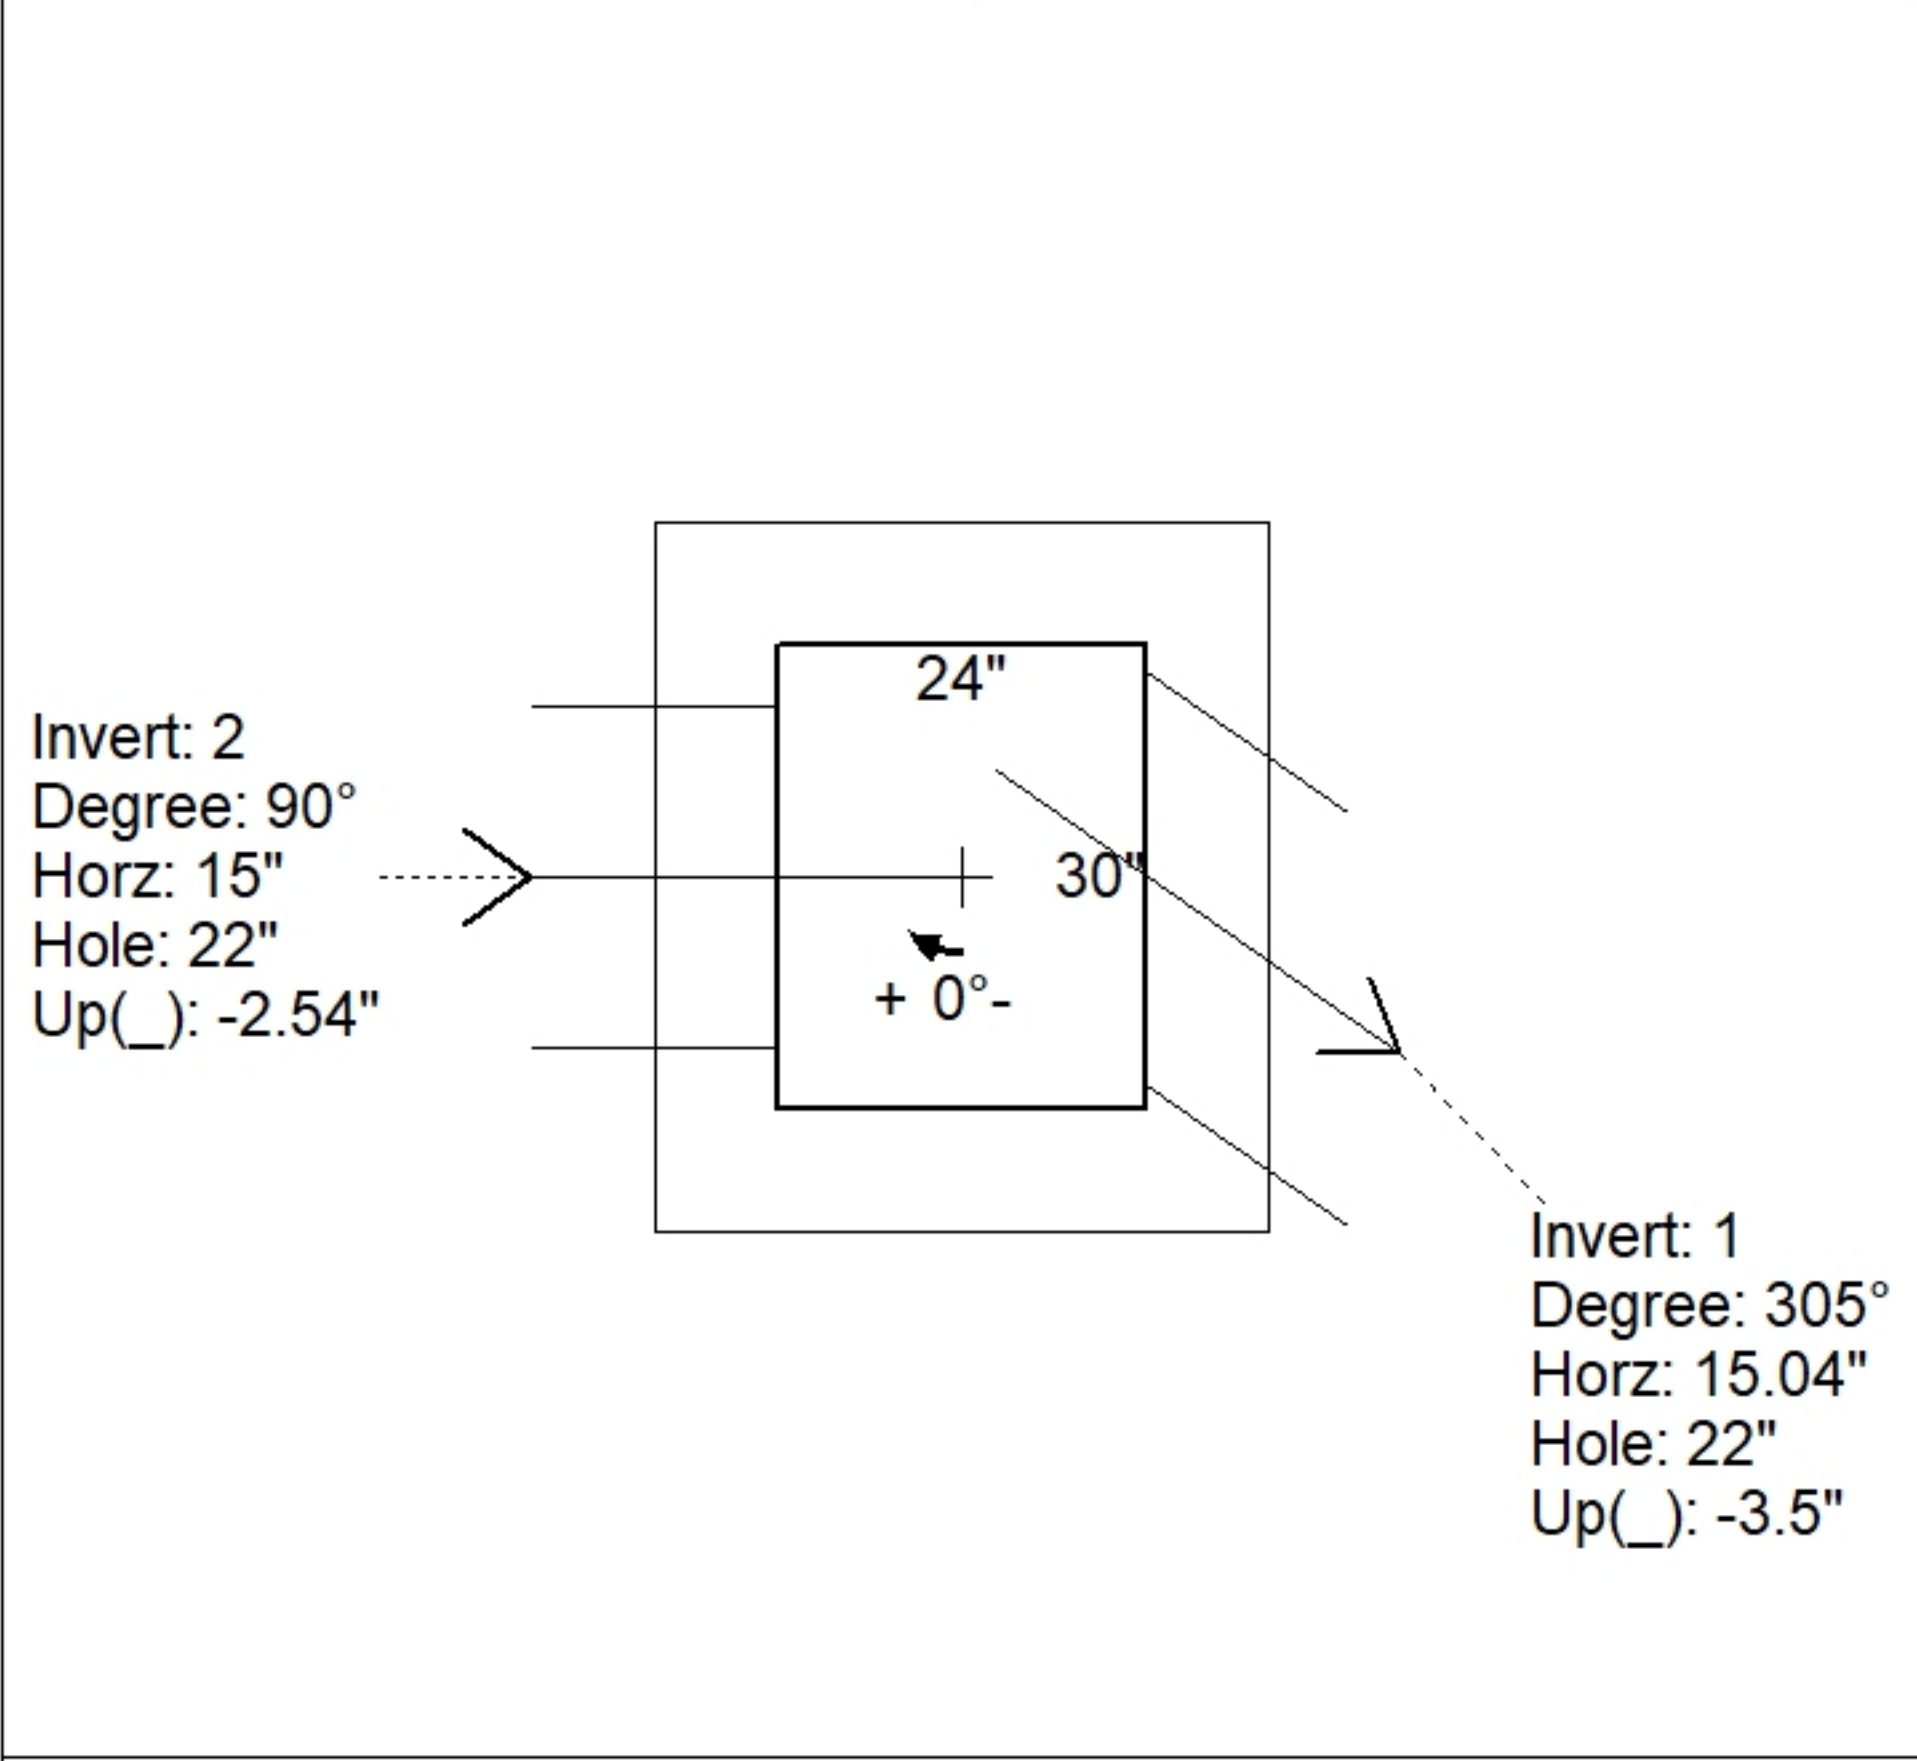
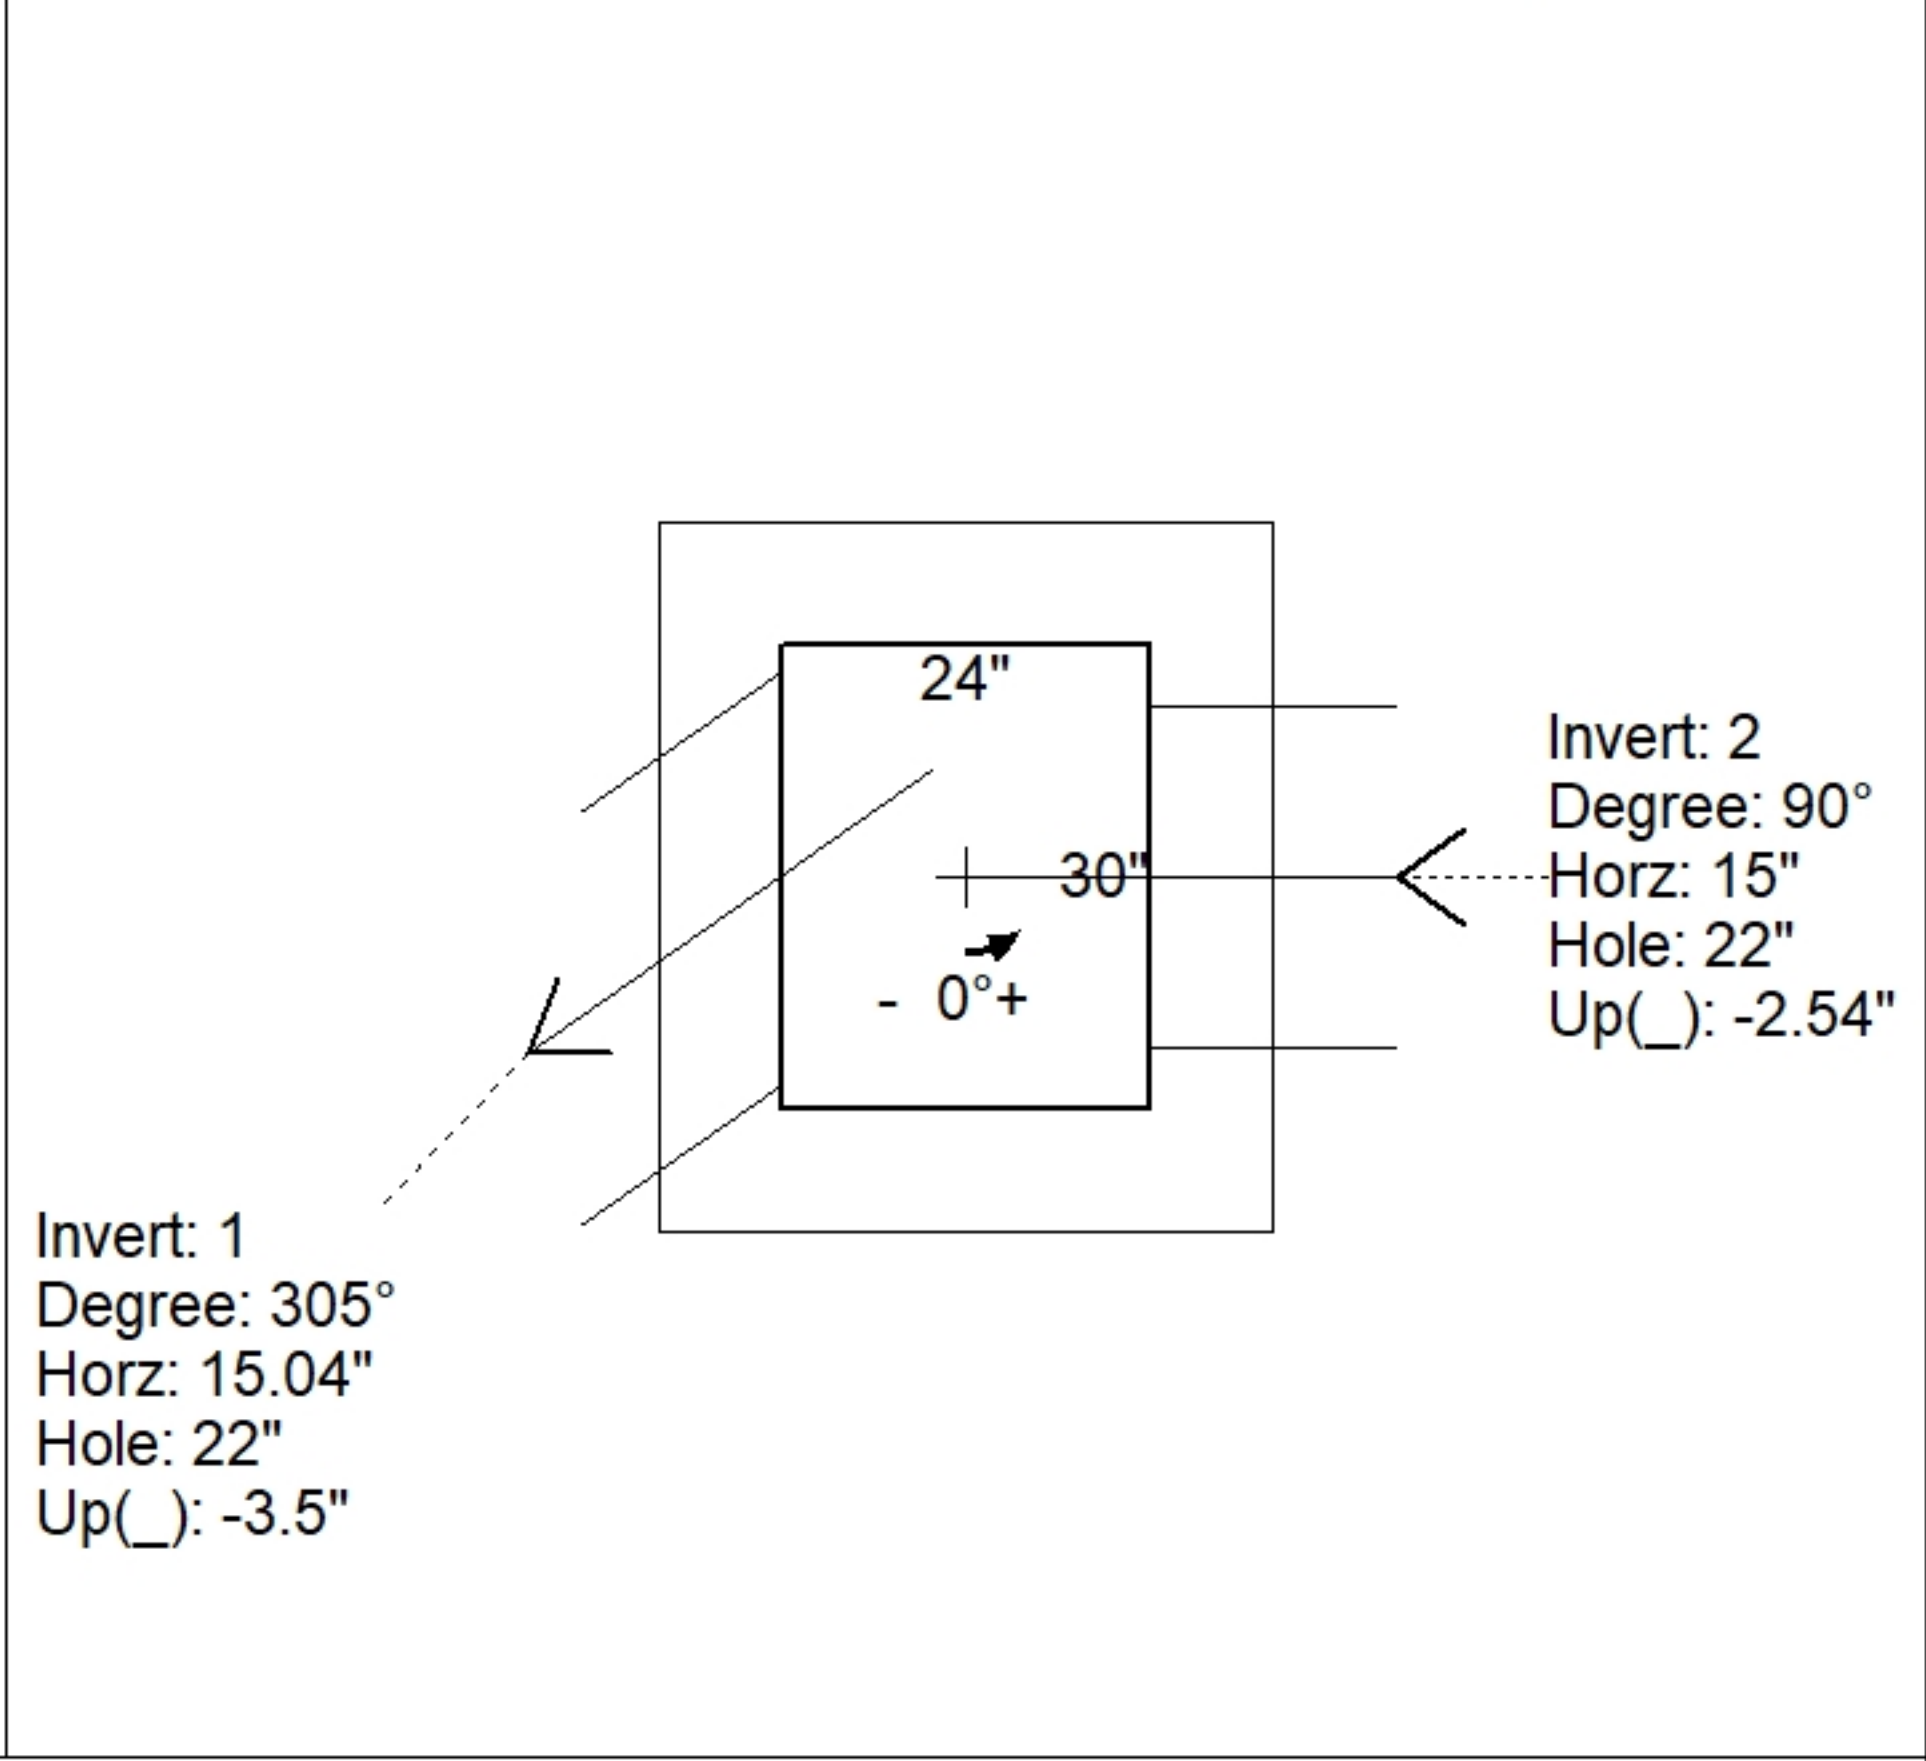
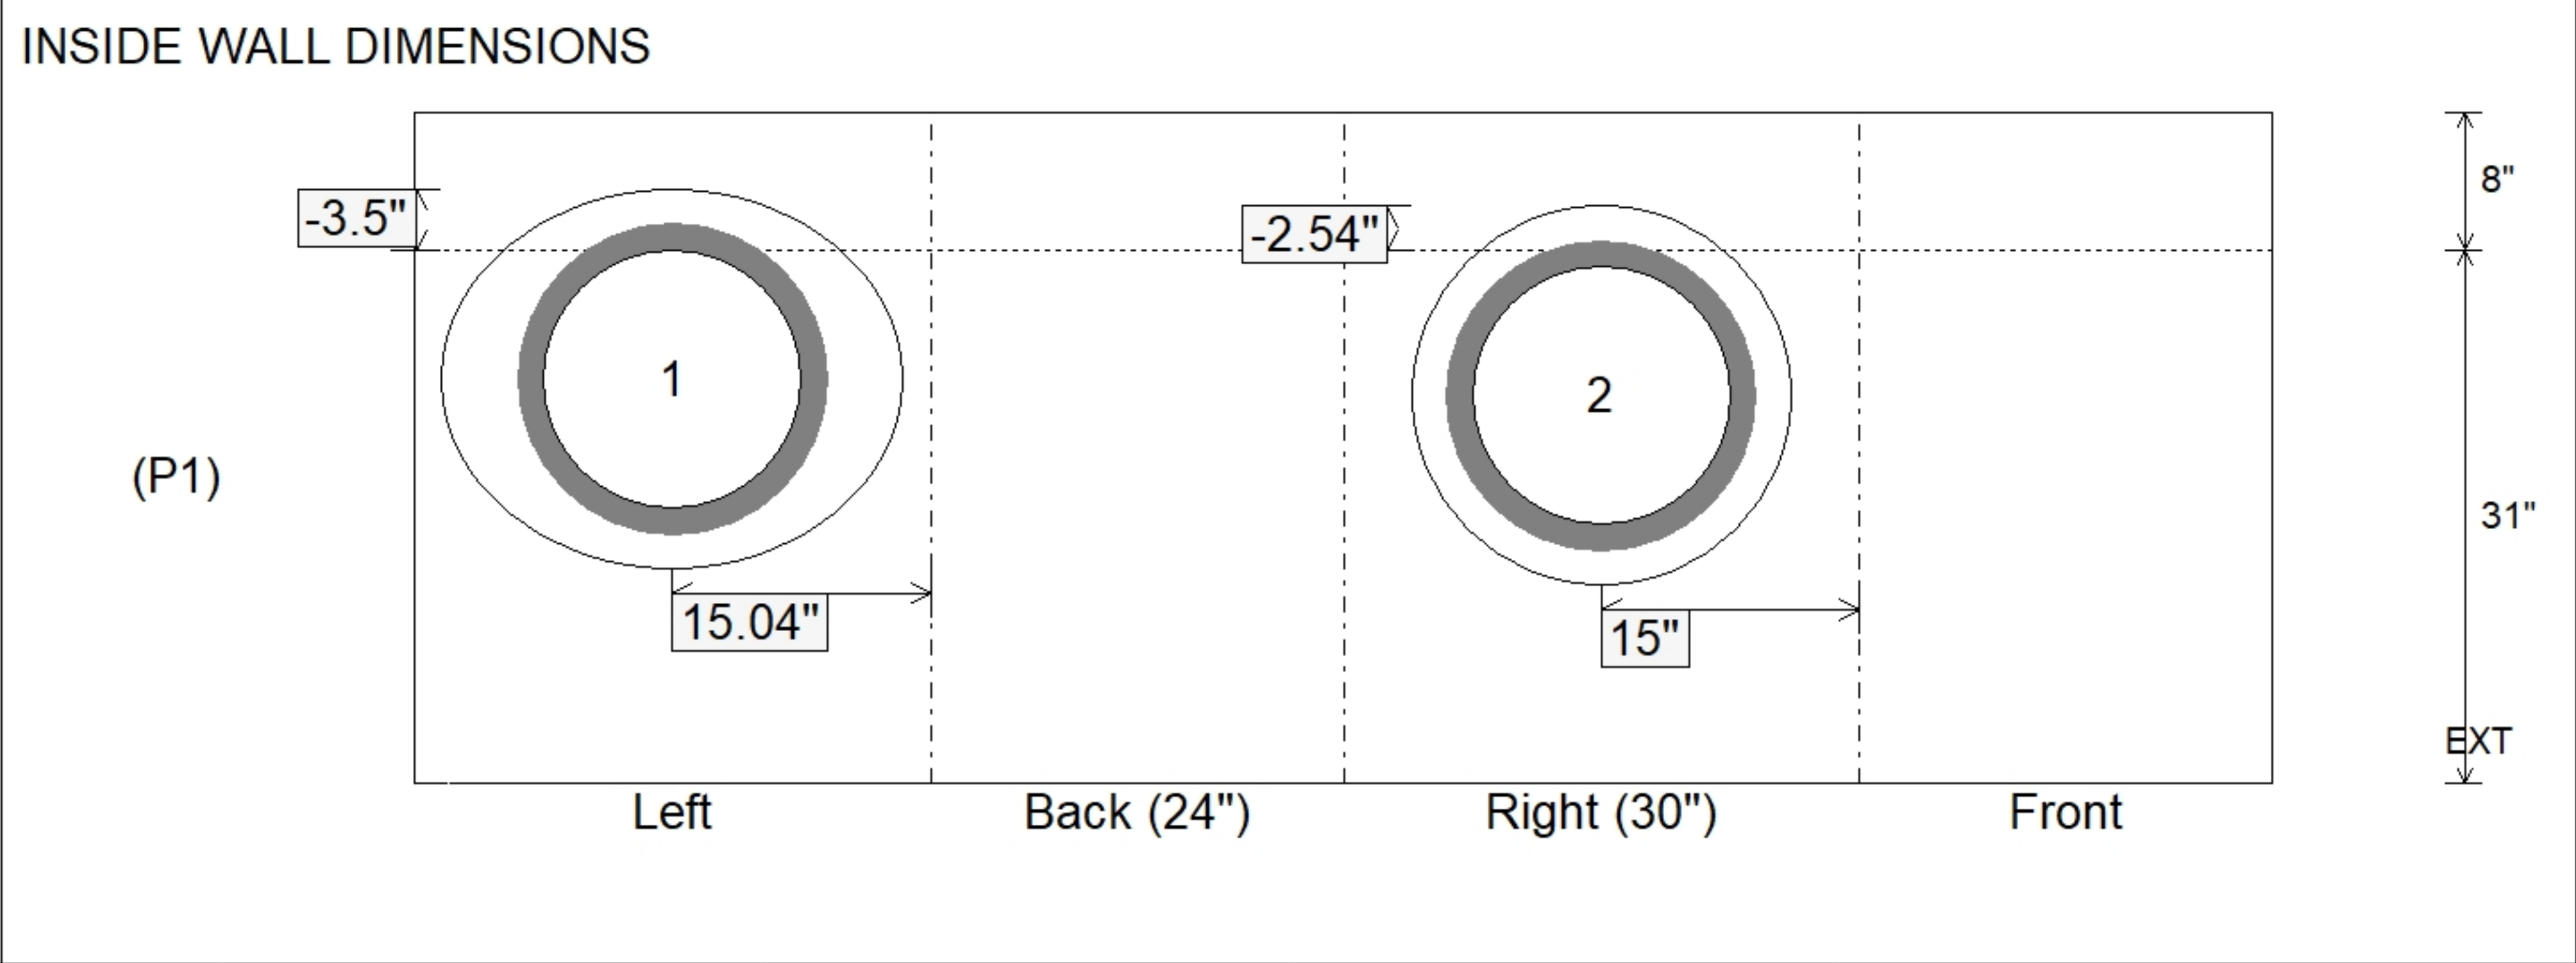


Job Name: 26-2648 Midtown Commons Apartments Job Location: Madisonville, KY Contractor: Steve Pleasant Excavating				Plant: Beaver Dam 7/20/2026 10:44:20 AM		Tech: S. Felletter PC:				
Structure ID: 5.1 CBIF										
P1		BX24300808VF		BOX BASE 8inW, 8inF, Variable Ht F/n						
P2) 24" x 30" - CASTING HEIGHT - 5" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 31" 1) CASTING - HOE KY-465 SET (CBI TY F) 1) 24" x 30" - Conseal CS-102 1.00" 2) Hole - 22						0 lb 3582 lb 465 lb 0 lb 0 lb ----- Structure Total: 4047 lb		Structure Notes: 1. KYTC CBI TYPE F / ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. NO STEPS. 5. CASTING BY ICAST (HOE KY-465 SET). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
Rim: 428.96'		Rim to Invert: 3.04'		Slack: 0.48"		Sump: 0"		Step Position:		
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	425.92'	305°	28.642"	15" ADS N-12	18"	Hole 22	22"	26.857"	-3.5"	-6.85"
Invert 2	426'	90°	23"	15" ADS N-12	18"	Hole 22	22"	22"	-2.54"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)  Invert: 2 Degree: 90° Horz: 15" Hole: 22" Up(): -2.54" Invert: 1 Degree: 305° Horz: 15.04" Hole: 22" Up(): -3.5"  Invert: 2 Degree: 90° Horz: 15" Hole: 22" Up(): -2.54" Invert: 1 Degree: 305° Horz: 15.04" Hole: 22" Up(): -3.5" INSIDE WALL DIMENSIONS  (P1) Left Back (24") Right (30") Front EXT Coating (Int): Coating (Ext): Seam Up: Flat Seam Dn: n/a Wall Thickness: 8" Floor Height: 8" Height (Int): 31" Height (Ext): 39" Weight (Net): 3582 lb Volume (Net): 0.92cu.yd										