

Job Name: 26-2648 Midtown Commons Apartments
Job Location: Madisonville, KY
Contractor: Steve Pleasant Excavating

Plant: Beaver Dam

Tech: S. Felletter

7/20/2026 10:46:19 AM

PC:



Structure ID: 6.5 MHC

P2 BX8484-08LD08-SP

BX FLAT LID 08inW w/24"Hole F/F

- P3) 24" - CASTING HEIGHT - 8"
P2) 84" x 84" - BX FLAT LID 08inW w/24"Hole F/F - 8"
P1) 84" x 84" - BX BASE w/FLANGE 08W/12F/08EF F/n - 80"
1) CASTING - HOE KY-510 F/C (KY TY.2)
1) 84" x 84" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
1) Hole - 56
1) Hole - 32
1) Hole - 74 x 52
1) Hole - 22
8) MH Step ML-10-TDS-NCR - 10"


- 0 lb Structure Notes:
6409 lb 1. PER KYTC MANHOLE TYPE C / ASTM C913 SPEC'S.
29282 lb 2. CONCRETE = 4,000 PSI AT 28 DAYS.
510 lb 3. NO INVERT CHANNEL
0 lb 4. CASTING BY ICAST (HOE KY-510 F/C).
0 lb 5. SECONDARY POUR REQ'D FOR EXTENDED
0 lb FLANGE (8"WD x 12" THICK).
0 lb .
0 lb REINFORCING PER ASTM A615 (GRADE 60).
0 lb - TOP SLAB #5 BAR AT 6" C.C.E.W (DBL MAT).
0 lb - WALLS #5 BAR AT 6" C.C.E.W.
0 lb - FLOOR #5 BAR AT 12" C.C.E.W.

Structure Total:

36201 lb

NOTES:

1. MANUFACTURED TO KYTC MANHOLE TYPE C/ASTM C-931 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: DOUBLE MAT #5 BAR @ 6" C.C. E.W. (GRADE 60).

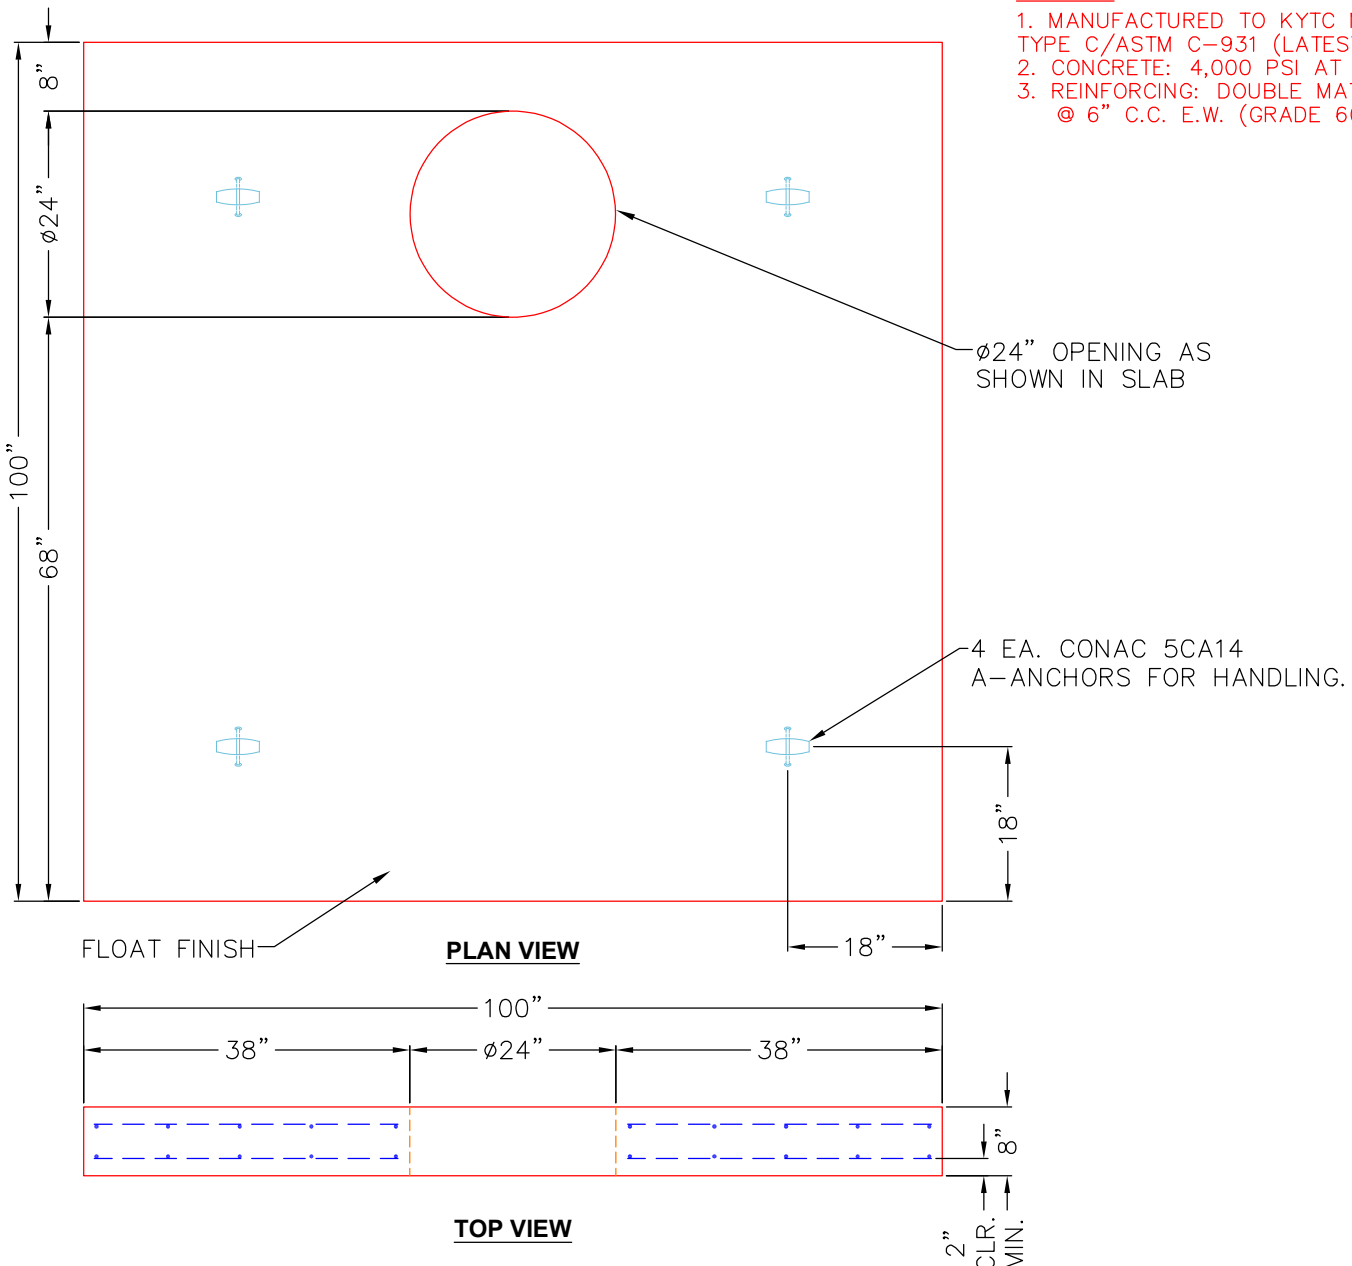

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 6409 lb
Volume (Net): 1.64cu.yd