

Job Name: 26-2692 868541 Georgetown Commons Phase 2
Job Location: Georgetown, KY
Contractor: Contech Engineering Solutions

Plant: Beaver Dam

6/15/2026 3:40:39 PM

Tech: S. Felletter

PC: C. Goff



Structure ID: 10-CS-12

P5 MH144LD18SP

MH FLAT TOP SPEC. (2 - 24"Ø HOLES) F/G



- P6) 24" - CASTING HEIGHT - 4"
P5) 144" - MH FLAT TOP SPEC. (2 - 24"Ø HOLES) F/G - 18"
P4) 144" - MH RISER T/G - 36"
P3) 144" - MH RISER Custom Ht T/G - 64"
P2) 144" - MH RISER T/G - 48"
P1) 144" - MH MONOBASE 14F, Custom Ht T/n - 24"
1) CVSTENCILING
1) ASSEMBLY REQUIRED - BRACKETS ONLY
4) 144" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 32

0 lb Structure Notes:
23623 lb 4" CASTING BY OTHERS
19370 lb
32619 lb
25826 lb LIFTING ANCHORS TO BE INSTALLED
39578 lb ON THE OUTSIDE OF THE STRUCTURE
0 lb
0 lb ICAST TO INSTALL BRACKETS ONLY
0 lb
0 lb CONTECH'S LOGO AS WELL AS THE
0 lb INLET AND OUTLET MUST BE
0 lb STENCILED ONTO THE STRUCTURE

Structure Total: 141015 lb

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 & #6 BAR AS SHOWN (GRADE 60).
4. WEIGHT: 23,626 LBS.

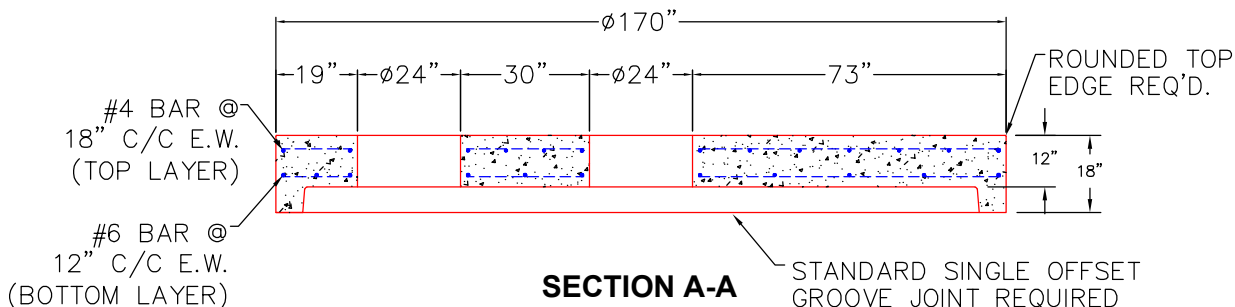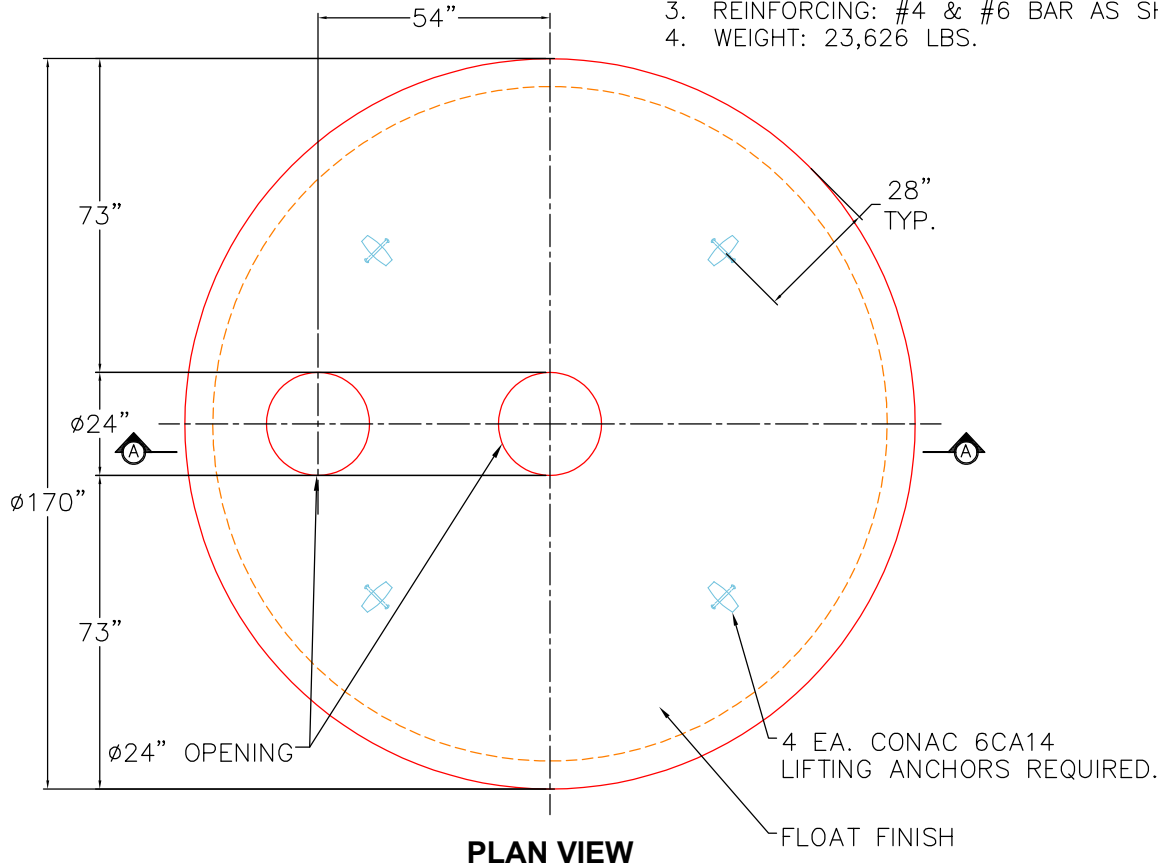

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 13"

Height (Ext): 18"

Weight (Net): 23623 lb
Volume (Net): 6.03cu.yd