

Job Name: 26-2692 868541 Georgetown Commons Phase 2
Job Location: Georgetown, KY
Contractor: Contech Engineering Solutions

Plant: Beaver Dam

6/15/2026 3:40:39 PM

Tech: S. Felletter

PC: C. Goff



Structure ID: 15-CS-10

P4 MH120LD18SP

MH FLAT TOP SPEC. (2 - 24"Ø HOLES) F/G



- P5) 24" - CASTING HEIGHT - 4"
P4) 120" - MH FLAT TOP SPEC. (2 - 24"Ø HOLES) F/G - 18"
P3) 120" - MH RISER T/G - 84"
P2) 120" - MH RISER T/G - 36"
P1) 120" - MH MONOBASE 14F, Custom Ht T/n - 36"
1) CVSTENCILING
1) ASSEMBLY REQUIRED - BRACKETS ONLY
3) 120" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 32

Structure Total:

0 lb	Structure Notes:
16223 lb	4" CASTING BY OTHERS
30345 lb	
13675 lb	
32280 lb	LIFTING ANCHORS TO BE INSTALLED
0 lb	ON THE OUTSIDE OF THE STRUCTURE
0 lb	
0 lb	ICAST TO INSTALL BRACKETS ONLY
0 lb	
0 lb	CONTECH'S LOGO AS WELL AS THE
0 lb	INLET AND OUTLET MUST BE
92523 lb	STENCILED ONTO THE STRUCTURE

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 & #5 BAR AS SHOWN (GRADE 60).
4. WEIGHT: 16,223 LBS.

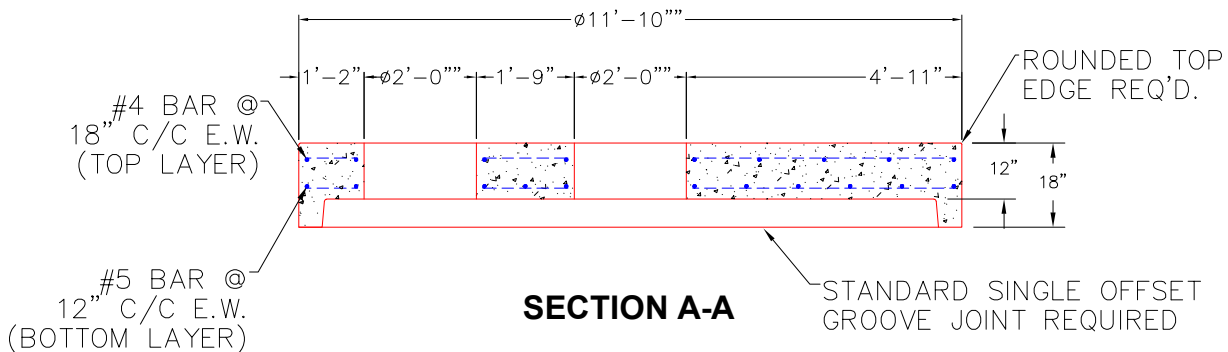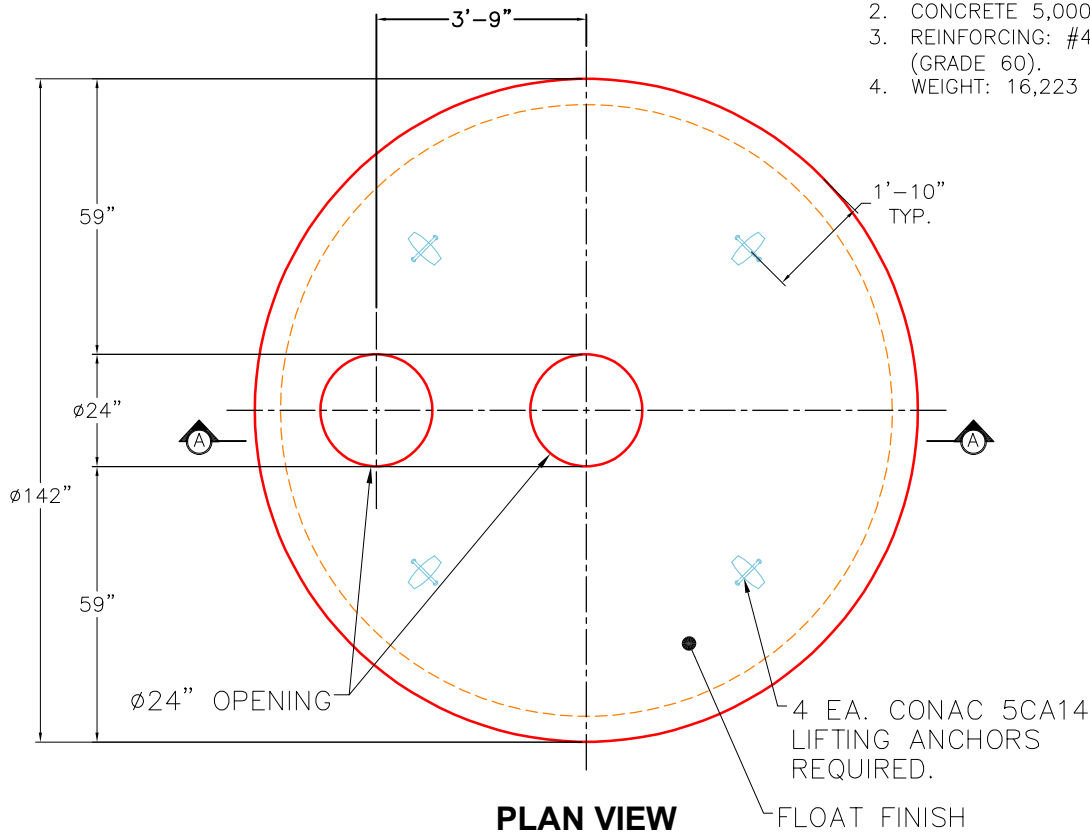

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 11"

Height (Ext): 18"

Weight (Net): 16223 lb
Volume (Net): 4.14cu.yd