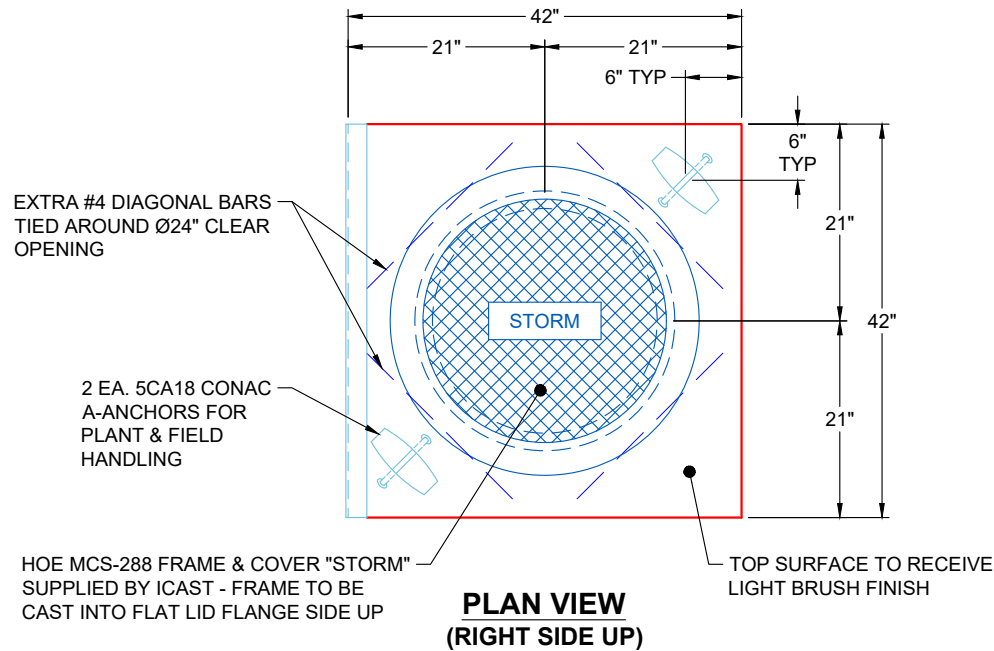


### GENERAL NOTES:

1. MANUFACTURED PER ASTM C-913 LATEST REVISION)
2. CONCRETE: 5,000 PSI AT 28 DAYS
3. REINFORCEMENT: #4 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. HOE MCS-288 FRAME & COVER "STORM" SUPPLIED BY ICAST - FRAME TO BE CAST INTO FLAT LID FLANGE SIDE UP
5. WEIGHT: 887 LBS
6. 2" X 2" X 42" LONG BULL NOSE METAL ANGLE W/ 3 EA. 4" NELSON STUDS (SUPPLIED BY ICAST) TO BE CAST INTO STREET SIDE TOP EDGE OF FLAT LID - FABRICATE FROM 2" X 2" X 0.25" ANGLE IRON
7. LIFTERS: 2 EA. 5CA18 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING
8. TOP SURFACE TO RECEIVE LIGHT BRUSH FINISH

### PRODUCTION WORK ORDER

PRODUCT I.D.: BX030030-06LD06-S

DESCRIPTION: 42" X 42" X 6" FLAT LID SPECIAL



#### QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ HOLE LOCATION(S) CORRECT.
- ☐ REINFORCING & SPACING CORRECT.
- ☐ CASTING LOCATION & ORIENTATION CORRECT.
- ☐ EDGES CHAMFERED.
- ☐ SHIPLAP JOINT INSTALLED.

PRODUCT VIEW: RIGHT SIDE UP

CUSTOMER: CONVERGENT WATER TECHNOLOGIES

PLANT: BEAVER DAM, KY

PROJECT: 2787 CONVERGENT PRETX CURB INLET

WEIGHT: 887 LBS

STRUCTURE: QL2

TOP SECTION JOINT: FLAT

ORDER NO: 26-2700

BASE SECTION JOINT: N / A

PE: J.H. ROSS

DRAWING: K. CARDWELL

QC CHECK INITIALS:

DATE: 06/21/26

SCALE: NTS

PG. 1 OF 1

**Job Number:**

26-2700

**Job Name:**

2787 Convergent Pretx Curb Inlet

**Structure:**

QL2

**Note:**

HOE MCS-288 Frame Supplied By  
iCast To Be Cast Into Flat Lid Flange  
Side Up