

Job Name: 26-2736 ADS UA Local 52
Job Location: Louisville, KY
Contractor: ADS Advanced Drainage Systems, Inc.

Plant: Beaver Dam
7/9/2026 9:09:11 AM

Tech: S. Felletter
PC: T. Ryan



Structure ID: S110


P5 MH060LD13CC

MH FLAT TOP w/24" Ctr. Hole F/G


- P6) 24" - CASTING HEIGHT - 7"
P5) 60" - MH FLAT TOP w/24" Ctr. Hole F/G - 13"
P4) 60" - MH RISER T/G - 24"
P3) 60" - MH RISER T/G - 72"
P2) 60" - MH RISER T/G - 72"
P1) 60" - MH BASE T/n - 24"
1) ASSEMBLY REQUIRED
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) CASTING - HOE MC-375 F/C Storm
4) 60" - Conseal CS-102 1.00" (Double)
1) 24" - Conseal CS-102 1.00" (Double)
2) Hole - 12

0 lb
2674 lb
2505 lb
7516 lb
7402 lb
5239 lb
0 lb
0 lb
0 lb
271 lb
0 lb
0 lb
0 lb
Structure Total: 25607 lb

Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MC-375 F/C "STORM").
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

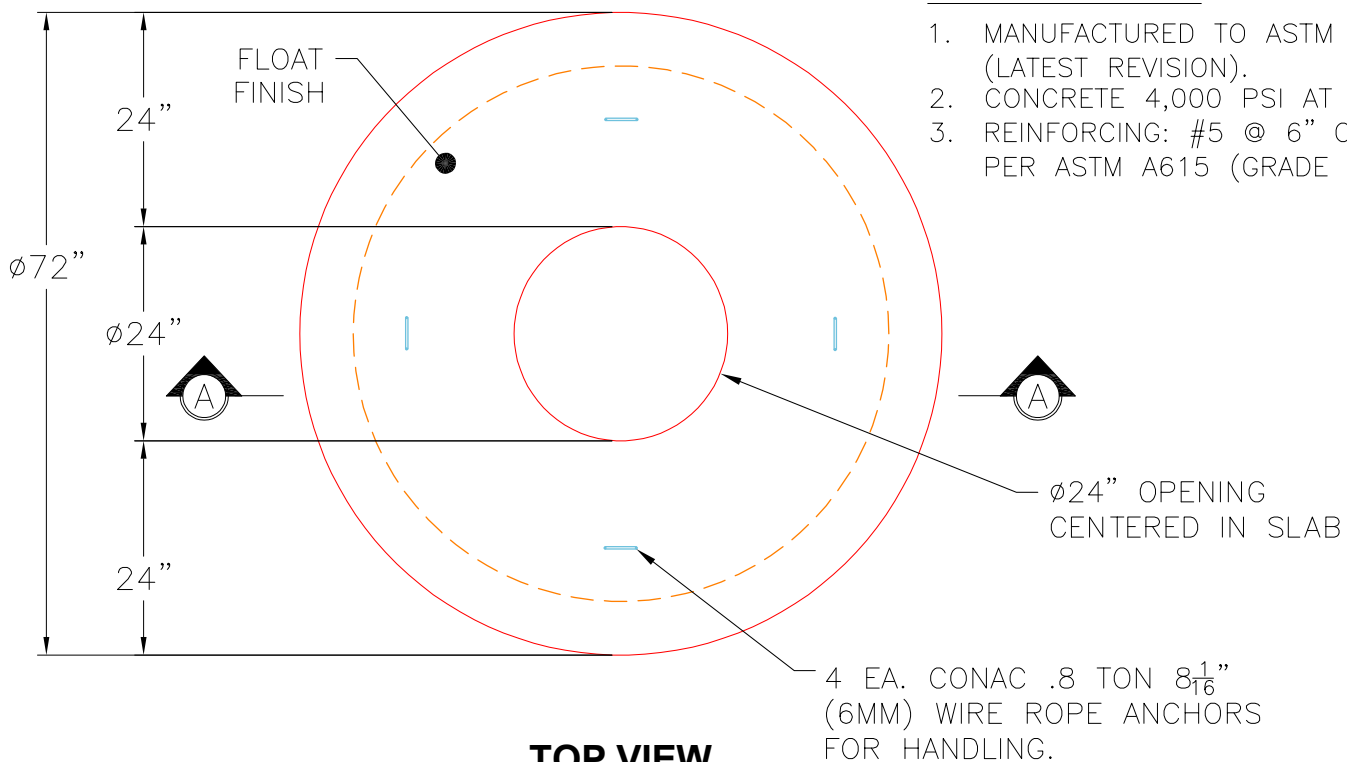

TOP VIEW

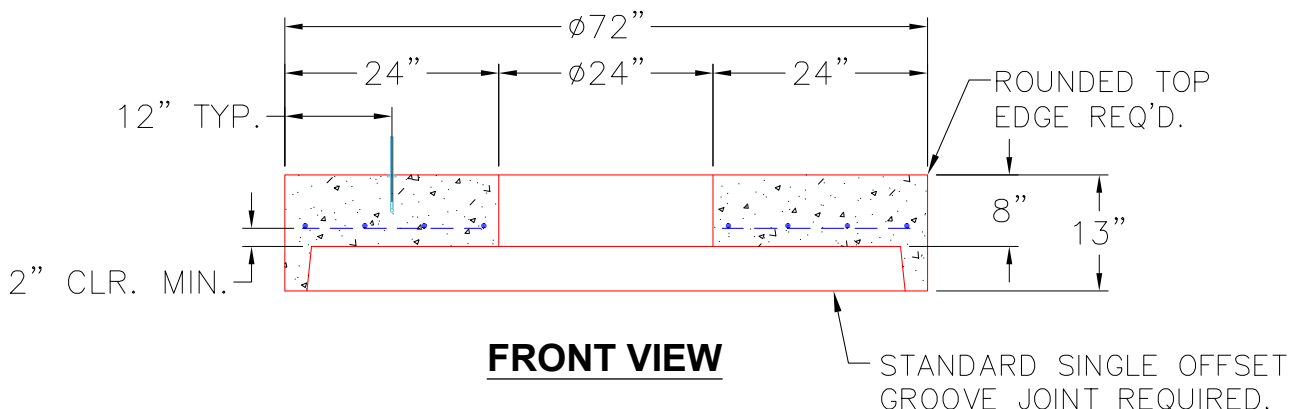

FRONT VIEW

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 6"	Height (Ext): 13"	Weight (Net): 2674 lb Volume (Net): 0.68cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--